


Fan Timer

VM154

APPLICATION 1

**SELECTABLE
TURN-ON TIMER
& TURN-OFF
TIMER**

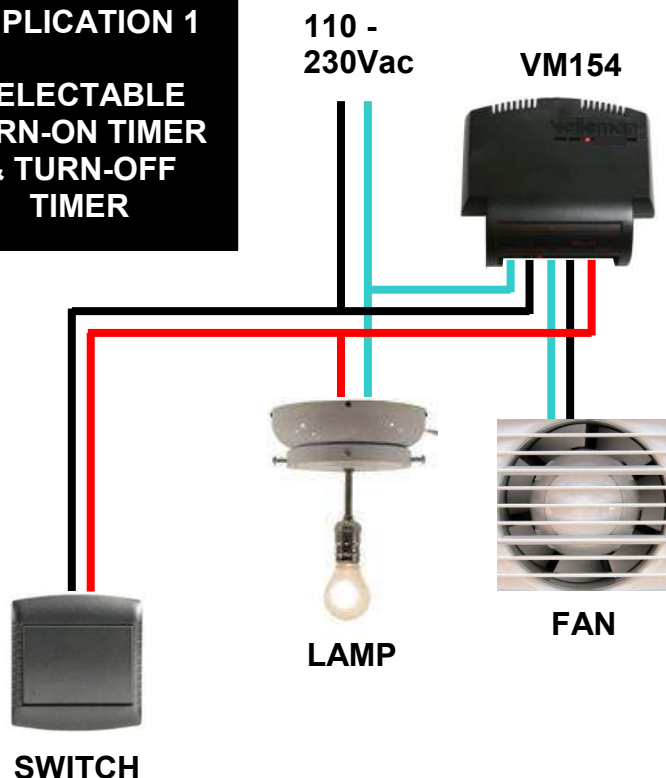

Fan turns on immediately or after 3 min when light is turned on.


When light is turned off, fan runs for 7 or 15 min and turns off automatically

Applications: To evacuate odours and/or damp air from showers, bathrooms, restrooms etc...

Turn-on timer prevents triggering when the room is briefly occupied.

APPLICATION 2

**TURN-ON TIMER
ONLY**

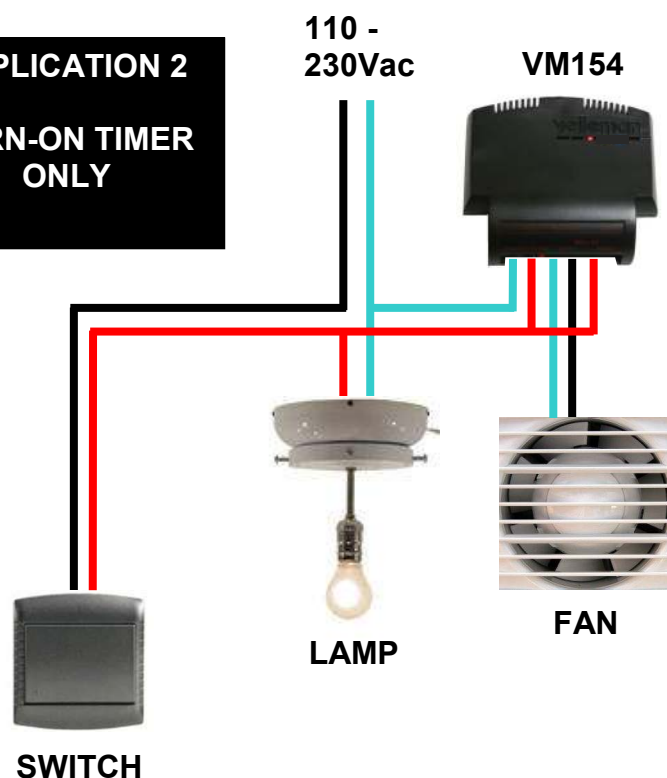

Fan turns on after 3 min when light is turned on

Fan turns off when light is turned off

Applications: To evacuate odours and/or damp air from showers, bathrooms, restrooms etc...

Turn-on timer prevents triggering when the room is briefly occupied.

User has full control over ventilation time. When the light is turned off, the fan is also turned off. Zero power consumption when light is turned off.

**Easy dipswitch setting
for all functions**



Technical:

Power supply: 110-230VAC

Turn-on time: approx 3 min

Turn-off times: 7/15 min approx.

Max load: 3A

Dimensions: approx 80x70x23mm