

Video cable

cinch coaxial cable for excellent image quality


Using a 75 Ω defined wave impedance the video cable provides a reliable connection of DVD Players, TV sets, or Receivers. Due to multiple signal shielding, pure materials, and precise workmanship this cable transmits any video signal with low loss, color fidelity, and clarity.

- 75 Ω defined characteristic impedance
- pure copper conductor and 2-way shielding for clear signal quality
- 24-Karat gold plated contacts for minimum transfer resistances


Specifications

Connections	
Plug material:	triple-coated PVC / ABS
Contact material:	24-Karat gold plated
Shielding:	yes
Port 1, type:	RCA plug
Connector 1, connector length (mm):	39.8
Connector 1, connector width (mm):	14.0
Connector 1, connector height (mm):	14.0
Port 2, type:	RCA plug
Connector 2, connector length (mm):	39.8
Connector 2, connector width (mm):	14.0
Connector 2, connector height (mm):	14.0
cable	
Type:	Round cable
Length (m):	0.5 1 2 3 5 7.5 10 15 20
Inner conductor material:	OFC (Oxygen free copper)
Inner conductor diameter (mm):	19 x 0.160
AWG:	22
Number of shieldings:	2 x
Type of 1st shielding	Aluminium foil
Type of 2nd shielding	Copper braid 112 wires x 0.12 mm cross section
Outer sheath material:	highly elastic PVC
Outer sheath diameter (mm):	6.0
Kink protection:	on both sides
Signal transmission	
Transmission modes:	analog video signals
Capacitance (pF):	60
Characteristic impedance (Ω):	75
General	
Operating temperature from / to (°C):	-10 / +80
Warranty (years):	10

casual



Cross section

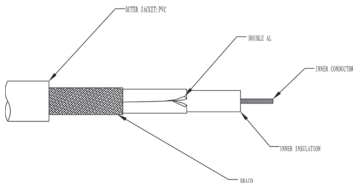

Wiring diagram

