


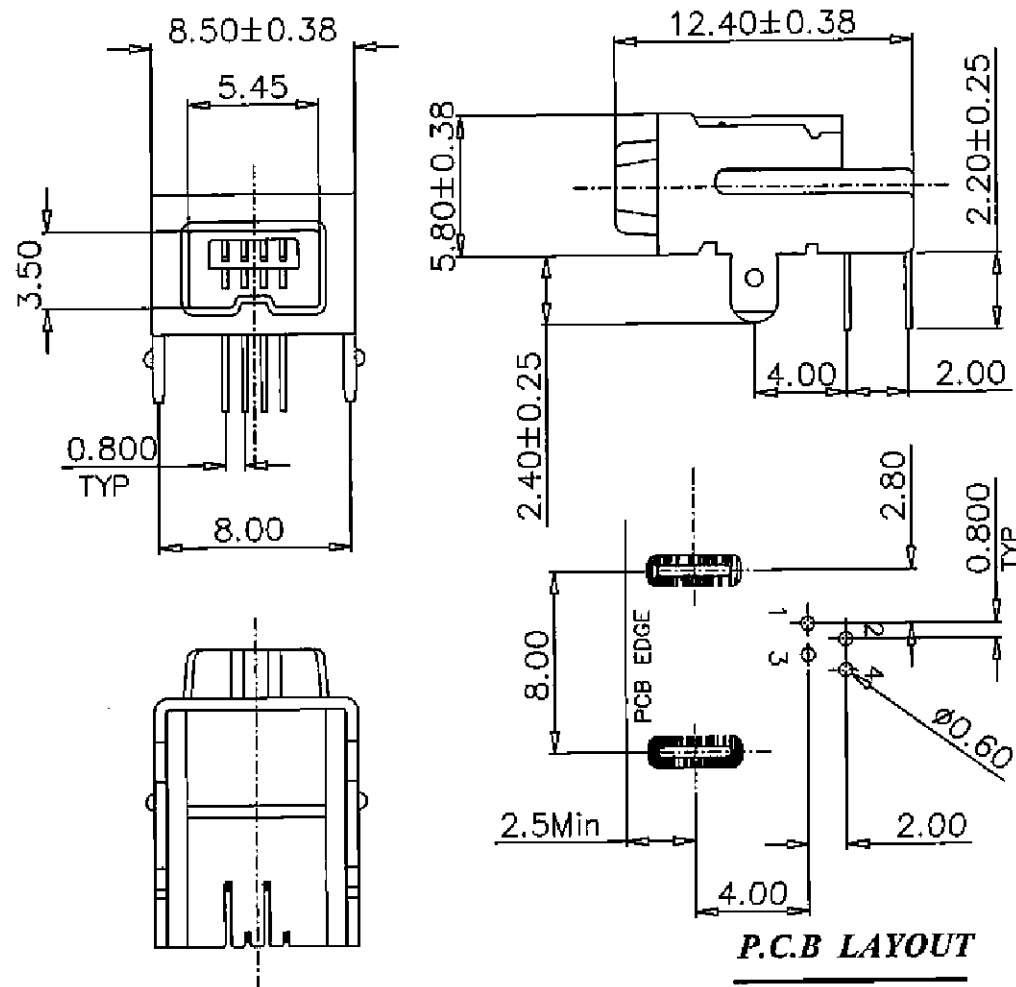

特性: Specifications:

- 電器: Electrical:
 - 接觸阻抗: Contact Resistance: 30 milliohms MAX.
 - 耐電壓: Dielectric Withstanding Voltage: 500 V AC. AT Sea Level.
 - 絕緣阻抗: Insulation Resistance: 1000 MEGA ohms MIN.
- 機構: Mechanical:
 - 結合力: Mating Force: 4.0 KG MAX. 最大4kg.
 - 拔出力: Unmating Force: 0.7 KG MIN. 最少0.7kg.
- 材料: Material:
 - 塑膠: Housing: High Temperature Thermoplastics, UL 94V-0 耐高溫塑膠.
 - 端子: Contact: Copper Alloy. 銅合金.
 - 鐵殼: Shell: Copper Alloy. 銅合金.
- 電鍍: Finish:
 - 端子: Contact: Plated Gold in Mating Area; Tin/Lead On Solder Tails. 接觸點鍍金, 腳鍍錫鉛.
- 鐵殼: Shell:
 - Tin/Lead Plating. 鍍錫鉛

P.C.B LAYOUT

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

制表日: 2002/12/04	DRAWING.	APPROVED
	Jane	

UNIT		SCALE	PART NAME	
MM		2:1	IEEE 1394- 4Pin Female Right Angle /Black Insulator	
APPD.	CKD.	TOLERANCE	PART NO.	REV.
		± 0.5	C8318-04FHBSB0	A