
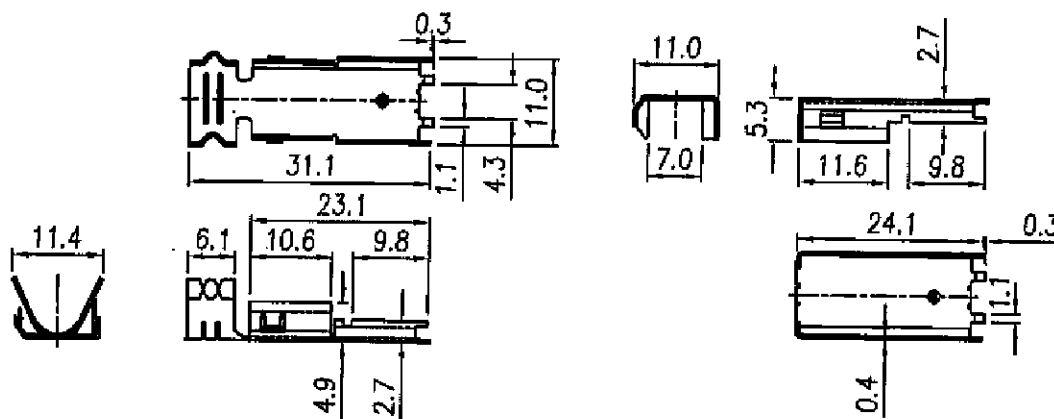


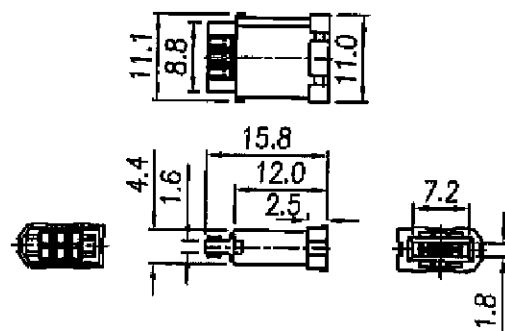

備註 /Note:

1.安規/Safety:

- 1-1.規格/Rating: DC 40V/1.5A
- 1-2.絕緣阻抗/Insulation Resistance: 500M ohm Min at DC 100V
- 1-3.絕緣耐壓/Dielectric Withstanding Voltage: AC 500V for 1 minute
- 1-4.接觸阻抗/Contact Resistance: 30m ohm or less

2.材質/MATERIAL:

- 2-1.膠芯/HOUSING: PBT+30%GF 94-V0(黑色 /BLACK)
- 2-2.針/PIN: 磷銅/PHOSPHOR BRONZE
- 2-3.上蓋/METAL UP COVER: 鐵/IROM
- 2-4.下蓋/METAL DOWN COVER: 鐵/IROM

3.電鍍/PLATING:

- 3-1.針/PIN: 鍍金/TIN, GOLD
- 3-2.上蓋/METAL UP COVER: 亮鍍/TIN
- 3-3.下蓋/METAL DOWN COVER: 亮鍍/TIN

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

UNIT

SCALE

PART NAME

MM

1:1

IEEE 1394 SOLDER TYPE 6P

APPD.

CKD.

TOLERANCE

PART NO.

REV.

制表日:2002/12/9

DRAWING.

APPROVED

± 0.3

C8324-06MSDB00

A

Jane