


MEGAVAL® BLADE TYPE FUSE

MegaVAL® fuses are compliant with ISO 8820-5 Standard, recommended for the protection of heavy cross-section wires with heavy current duty. MegaVAL® are made of Zinc alloy (100 ÷ 250 A) and Copper (500 A), to optimize the performance to the nominal current.


Breaking capacity: 2000[A]
Voltage rating: 32[Vdc]
Ambient Temperature: -40°C to +125°C




MTA/ISO MegaVAL® operating time limits		
% In	min [s]	max [s]
1,00	14400 ^(a)	-
1,35	120 ^(a)	1800 ^(a)
2,00	1	15
3,50	0,3 ^(b)	5
6,00	0,1 ^(a)	1 ^(a)

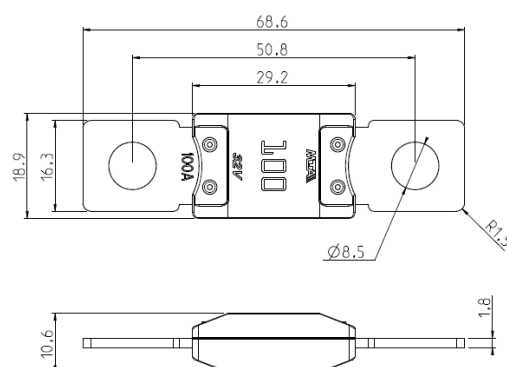

**MegaVAL® Operating Time
@23°C test module ISO**

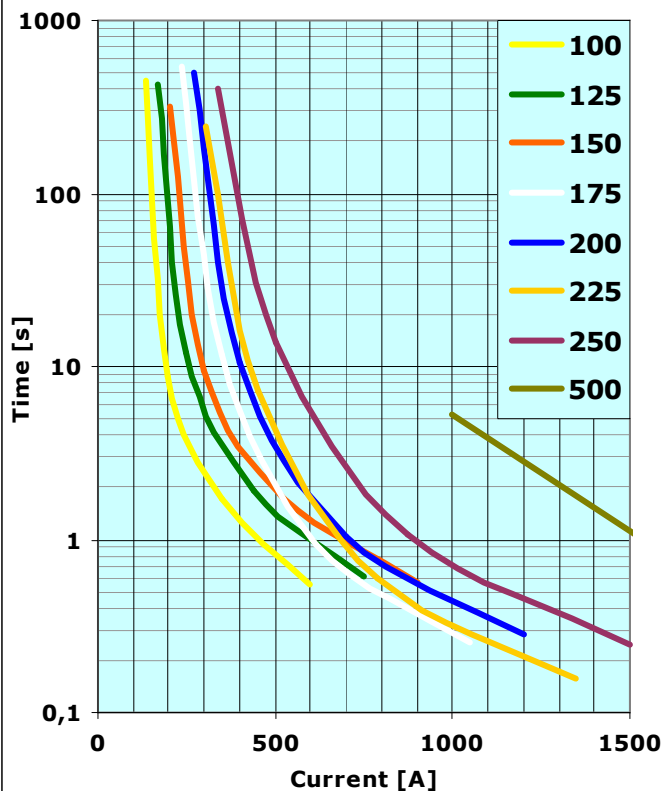

**MegaVAL® Re-Rating Curve.
Test module ISO**

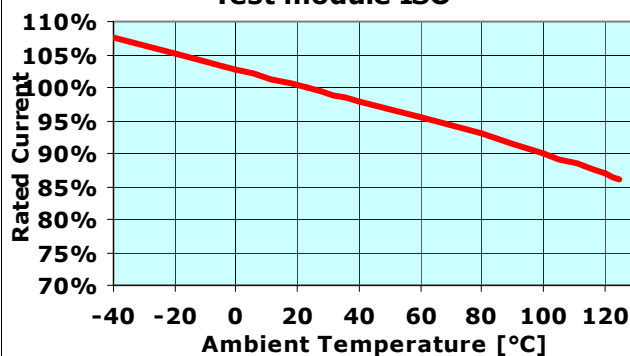

CURRENT RATING [A]	VOLTAGE DROP @ current rating [mV]	CABLE SIZE [mm ²]
100	86	16
125	85	
150	93	25
175	80	
200	81	35
225	100	
250	80	50
500	80	70