




# MIDI VAL® BLADE TYPE FUSE

MidiVAL® fuses are compliant with ISO 8820-5 Standard, applicable to automotive bolt-on Fuses. They allow space reduction compared to MegaVAL® for high current wiring protection. The operating features are characterized by strong time delay characteristics. MidiVAL® are made of Zinc alloy, a good choice to avoid high temperatures inside the box..

**Breaking capacity:** 2000[A]  
**Voltage rating:** 32[Vdc]  
**Ambient temperature:** -40°C to +125°C



MTA/ISO MidiVAL® operating time limits		
% I <sub>N</sub>	min [s]	max [s]
100	360000	-
110	14400	-
150	90	3600
200	3	100
300	0,3	3
500	0,1	1

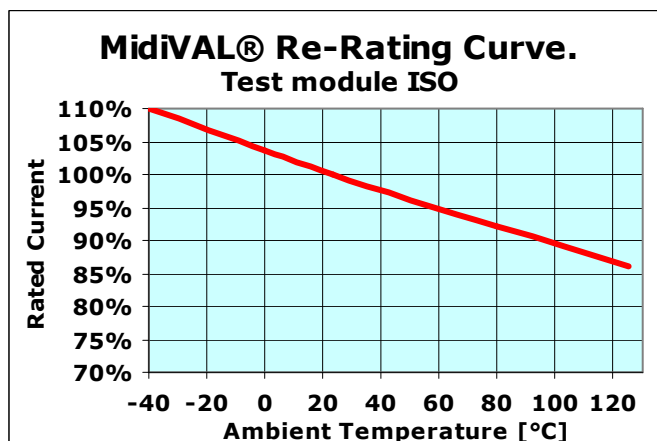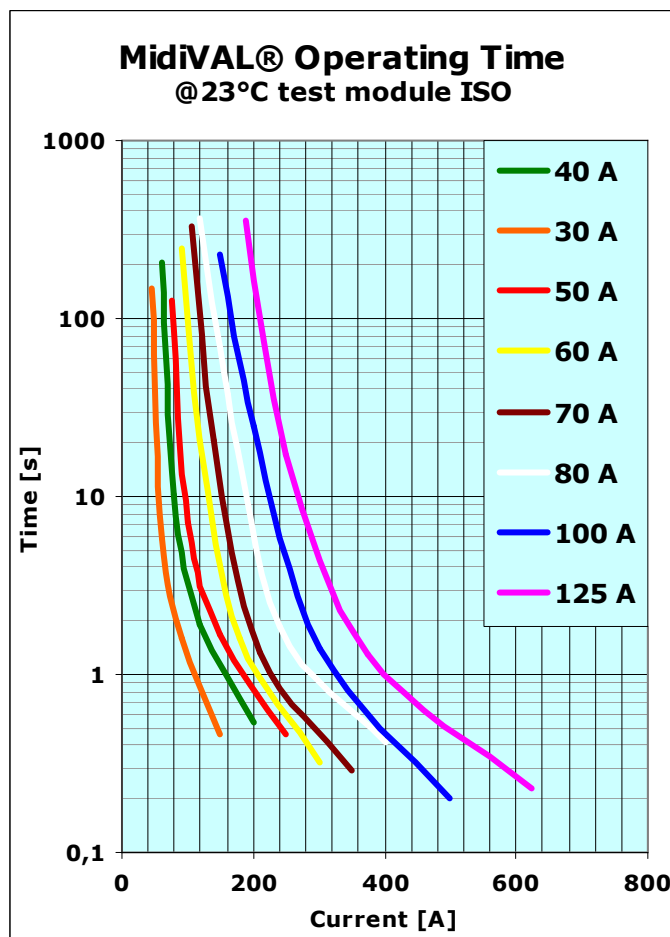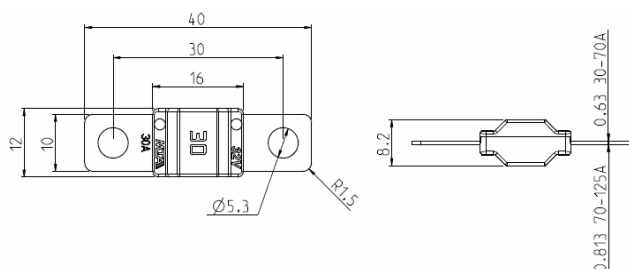

CURRENT RATING [A]	VOLTAGE DROP @ current rating [mV]	CABLE SIZE [mm <sup>2</sup> ]
30	105	2,5
40	90	4,0
50	80	6,0
60		10,0
70		
80	75	16,0
100		
125		25,0