

Motor Run

Construction

- Dielectric: polypropylene film
- Plastic case
- Polyurethane resin

Features

- Self-healing properties
- Low dissipation factor
- High insulation resistance

Typical applications

For general sine wave applications, mainly as motor run capacitor

Terminals

- Cable

Mounting parts

- Metal stud (max. torque = 5 Nm)
- Plastic stud (max. torque = 3 Nm)



Technical data and specifications

Standard	IEC 252 / EN 60252
Rated capacitance C_N	2 .. 60 μ F
Tolerance	$\pm 5\%$, $\pm 10\%$
Rated voltage U_N	250 .. 450 Vac
Rated frequency f_N	50.. 60 Hz
Life expectancy	10.000 h (Class B)

Maximum ratings

Maximum permissible voltage U_{max}	1,1 x U_N (U_N : rated voltage)
Maximum permissible current I_{max}	1,3 x I_N (I_N : rated current)

Motor Run

Technical data (cont`d)

Test data

AC test voltage terminal to terminal U_{TT}	$2 \times U_N, 60 \text{ s}$
Insulation voltage terminals to case	2000 Vac
Insulation resistance R_{is} or time constant τ at 20 °C	3000 s
Rel. Humidity ≤ 65 °C (minimum value)	
Dissipation factor $\tan\delta$ at 20 °C	$\leq 1,0 \times 10^{-3}$ (120 Hz)
Maximum rate of voltage rise $du/dt_{t_{max}}$	10 V/ μ s


Climatic data

Climatic category	25/085/21 in accordance with IEC 60068-1
Lower category T_{min} (2)	-25 °C
Upper category T_{max} (2)	+85 °C
Damp heat test t_{test}	21 days
Permitted capacitance $\Delta C/C$	$\leq 3 \%$

Note :

- 1) It should be noted that presence of harmonics produces over voltage & over current on capacitors. Resonance may cause serious damage to installation if a significant level of total harmonic distortion level exists for voltage or current. In such cases, series reactors must be considered.
- 2) Operating temperature class: In accordance with the reference standards, these temperatures are those measured on the surface on the capacitor

Dimensional drawings

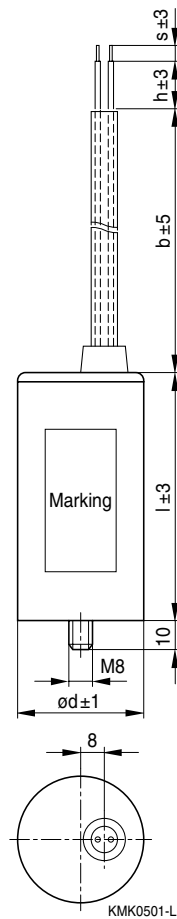

b – 25 0mm, 300 mm

h – 30 mm

s – 15 mm

Ordering codes and packing units

U _N Vac	C _N μF	Max. dimensions d x l (mm)	Ordering code	Packing unit (pcs.)
250	4	30 x 62	B32328-A1405-+0\$*	112
	5	30 x 62	B32328-A1505-+0\$*	112
	6	30 x 62	B32328-A1605-+0\$*	112
	7	30 x 62	B32328-A1705-+0\$*	112
	8	30 x 62	B32328-A1805-+0\$*	112
	9	30 x 62	B32328-A1905-+0\$*	112
	10	30 x 62	B32328-A1103-+0\$*	112
	12	30 x 62	B32328-A1126-+0\$*	112
	15	30 x 62	B32328-A1156-+0\$*	112
	20	35 x 62	B32328-A1206-+0\$*	84
	25	35 x 71	B32328-A1256-+0\$*	84
	30	35 x 71	B32328-A1306-+0\$*	84
	35	40 x 71	B32328-A1356-+0\$*	45
	40	40 x 71	B32328-A1406-+0\$*	45
	45	40 x 71	B32328-A1456-+0\$*	45
	50	40 x 98	B32328-A1506-+0\$*	45
	55	40 x 98	B32328-A1556-+0\$*	45
	60	40 x 98	B32328-A1606-+0\$*	45

U _N Vac	C _N μF	Max. dimensions d x l (mm)	Ordering code	Packing unit (pcs.)
400	2	30 x 62	B32328-A4205-+0\$*	112
	3	30 x 62	B32328-A4305-+0\$*	112
	4	30 x 62	B32328-A4405-+0\$*	112
	5	30 x 62	B32328-A4505-+0\$*	112
	6	30 x 62	B32328-A4605-+0\$*	112
	7	35 x 62	B32328-A4705-+0\$*	84
	8	35 x 62	B32328-A4805-+0\$*	84
	10	35 x 62	B32328-A4106-+0\$*	84
	12	35 x 71	B32328-A4126-+0\$*	84
	15	40 x 71	B32328-A4156-+0\$*	45
	20	40 x 71	B32328-A4206-+0\$*	45
	25	40 x 98	B32328-A4256-+0\$*	45
	30	40 x 98	B32328-A4306-+0\$*	45
	35	45 x 95	B32328-A4356-+0\$*	45
	40	45 x 95	B32328-A4406-+0\$*	45
	45	50 x 95	B32328-A4456-+0\$*	32
	50	50 x 95	B32328-A4506-+0\$*	32

U _N Vac	C _N μF	Max. dimensions d x l (mm)	Ordering code	Packing unit (pcs.)
450	3	30 x 62	B32328-A6305-+0\$*	112
	6	35 x 62	B32328-A6605-+0\$*	84
	8	35 x 71	B32328-A6805-+0\$*	84
	10	40 x 71	B32328-A6106-+0\$*	45
	12	40 x 71	B32328-A6126-+0\$*	45
	15	45 x 71	B32328-A6156-+0\$*	45
	20	45 x 71	B32328-A6206-+0\$*	45
	25	45 x 95	B32328-A6256-+0\$*	45
	30	45 x 95	B32328-A6306-+0\$*	45
	35	50 x 95	B32328-A6356-+0\$*	32
	40	45 x 120	B32328-A6406-+0\$*	45
	45	50 x 120	B32328-A6456-+0\$*	32
	50	50 x 120	B32328-A6506-+0\$*	32
	55	50 x 120	B32328-A6556-+0\$*	32
	60	50 x 120	B32328-A6606-+0\$*	32

Notes for ordering code:

+ Replace for tolerance on capacitance

J - ± 5%

K - ± 10%

\$ Replace for construction

1 - Plastic case FRPP (UL94 V-2)

2 - Plastic case PP

3 - Plastic case FRPP and M8 bolt

4 - Plastic case PP and M8 bolt

* Replace for wire length (mm)

1 - 65

2 - 100

5 - 150

7 - 200

9 - 250

© EPCOS AG 2000. All Rights Reserved. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this data sheet describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.