


### Specification:

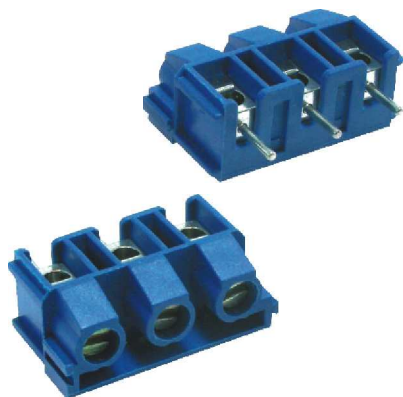

Contact: Brass (CuZn), Cu/Ni, tin plated  
 Terminal screw: Steel galvanized and chromated  
 Insulator: Terephthlene, PBT (30% Glass Filled) (UL94V-0)  
 Operating temperature: -30°C to 120°C  
 Current rating: 16 A  
 Resistance to tracking: 5 MW  
 Dielectric strength: 2000 V  
 Insulation withstanding voltage: 1500 VAC min.  
 Rated voltage: 300 V

### TB-7.5-P-2P-BL-x

#### Wire Guard:

none - with wire guard  
 G - without wire guard

#### Colour:

BL - blue  
 GY - gray  
 BK - black

#### No. of Poles

N - max. 24



#### Front Wire Inlet Type:

P - Screw on Top

#### Pitch:

7.5 - 7.5 mm  
 15 - 15.0 mm

#### Terminal Block

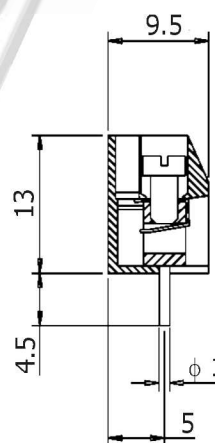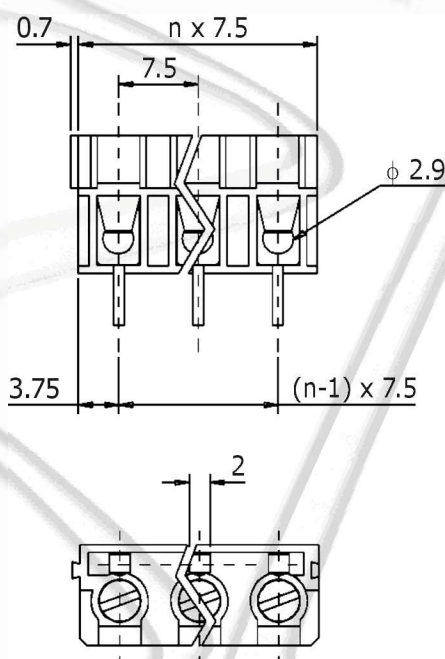

Recommended PCB holes diameter:  $\varnothing$  1.2 mm to  $\varnothing$  1.4 mm