

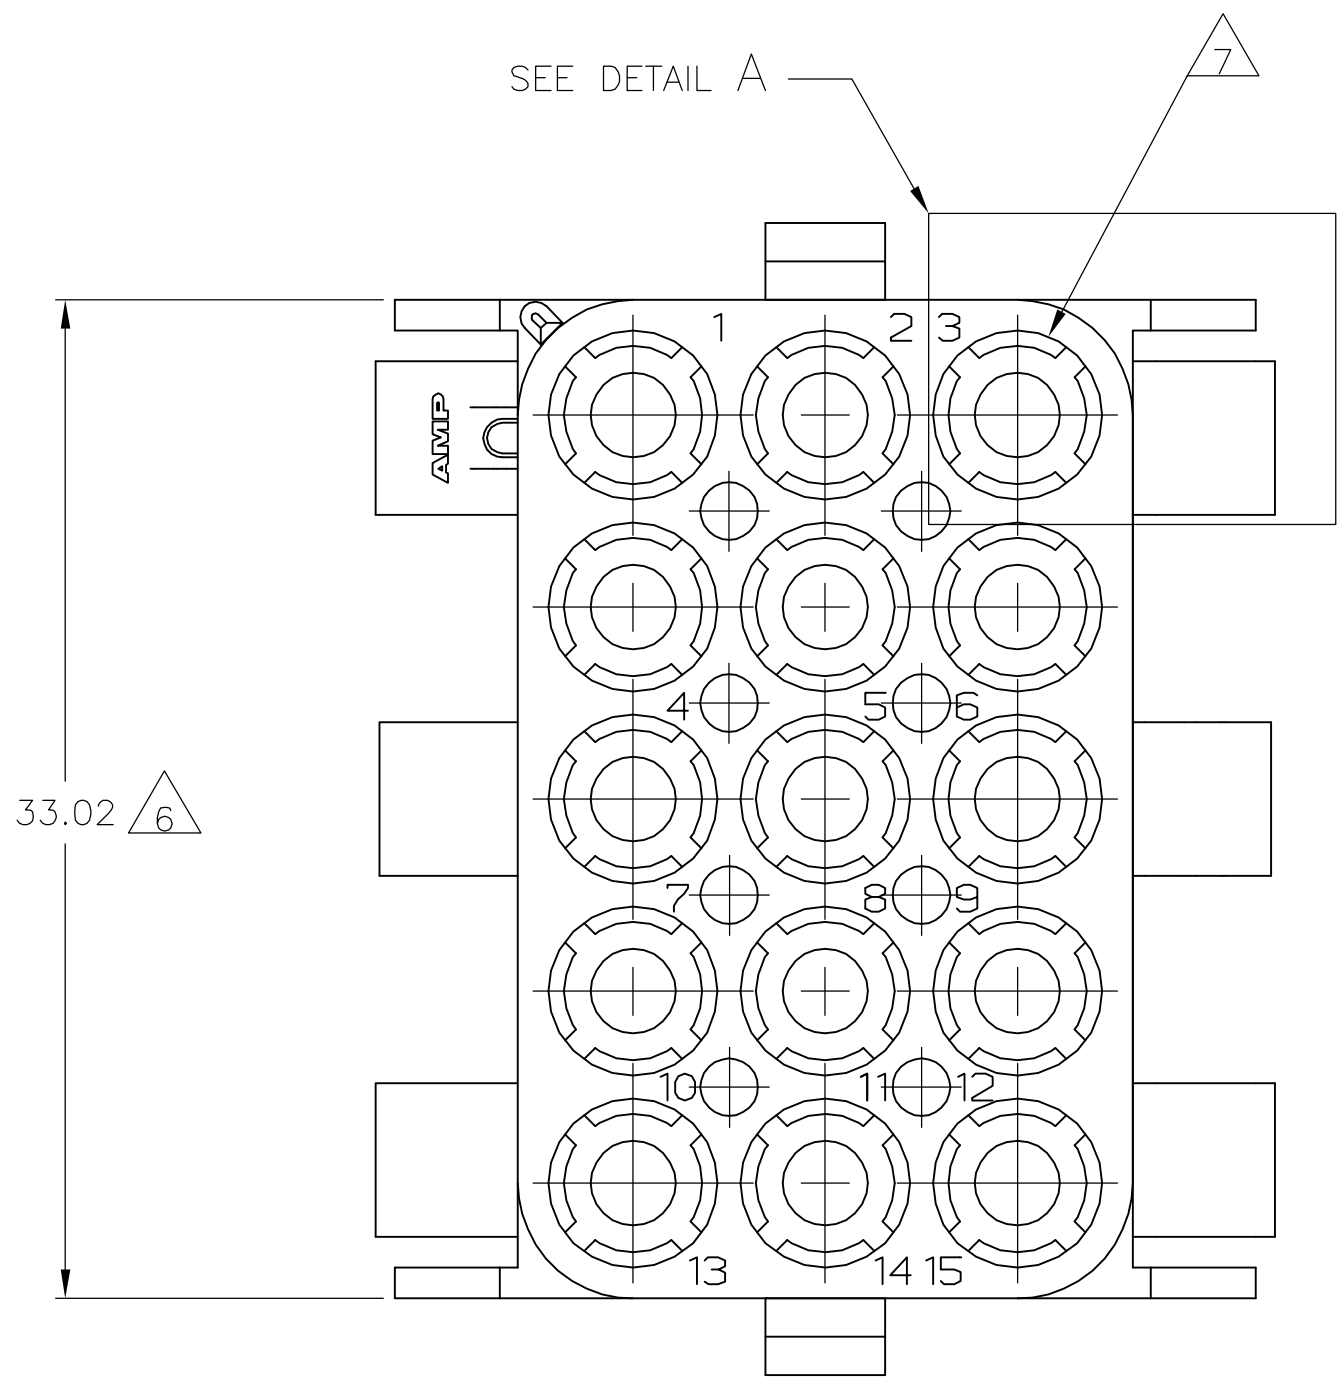
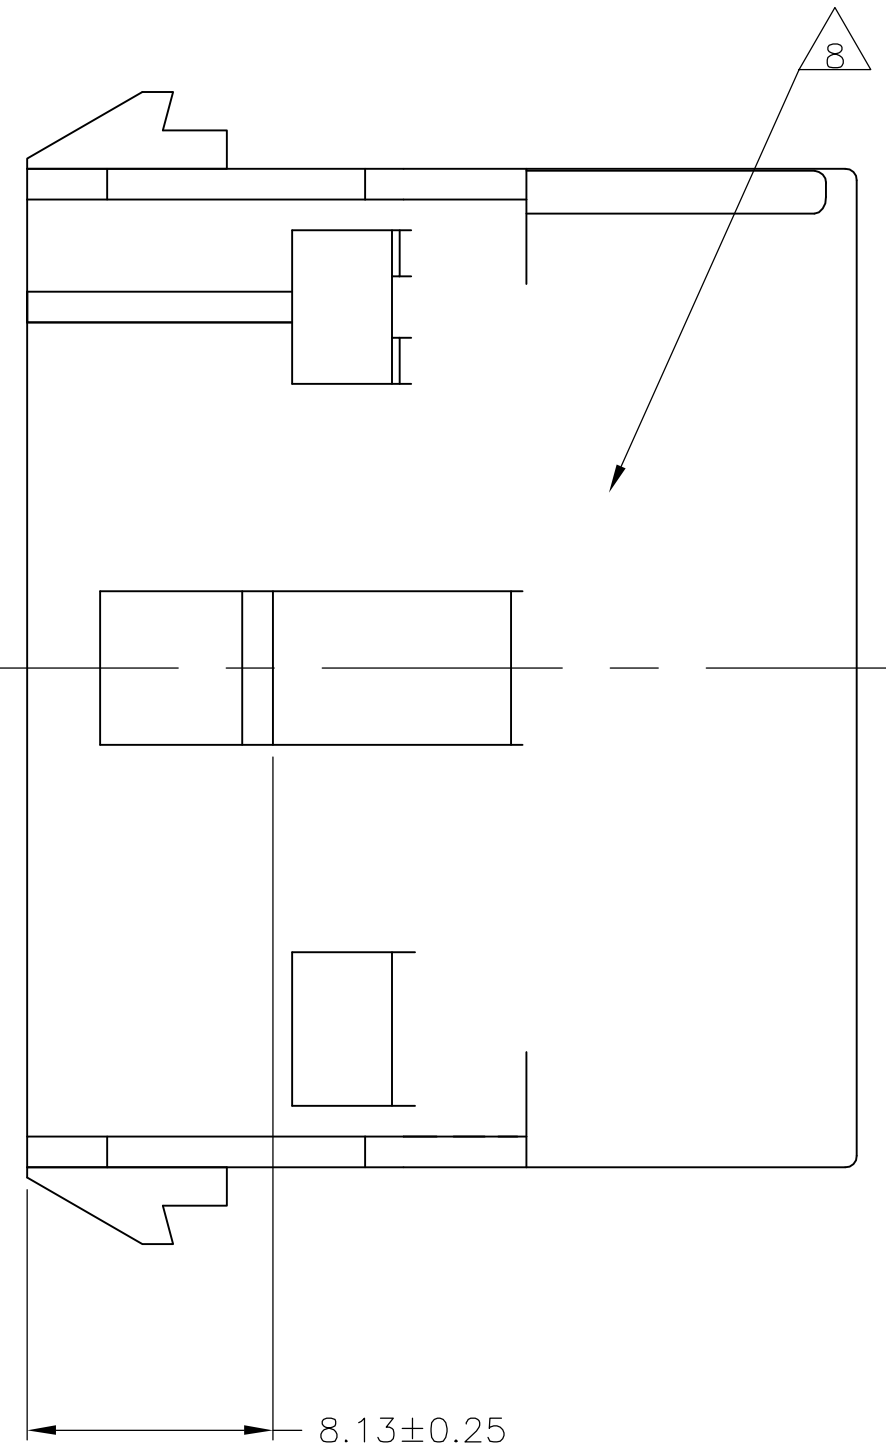
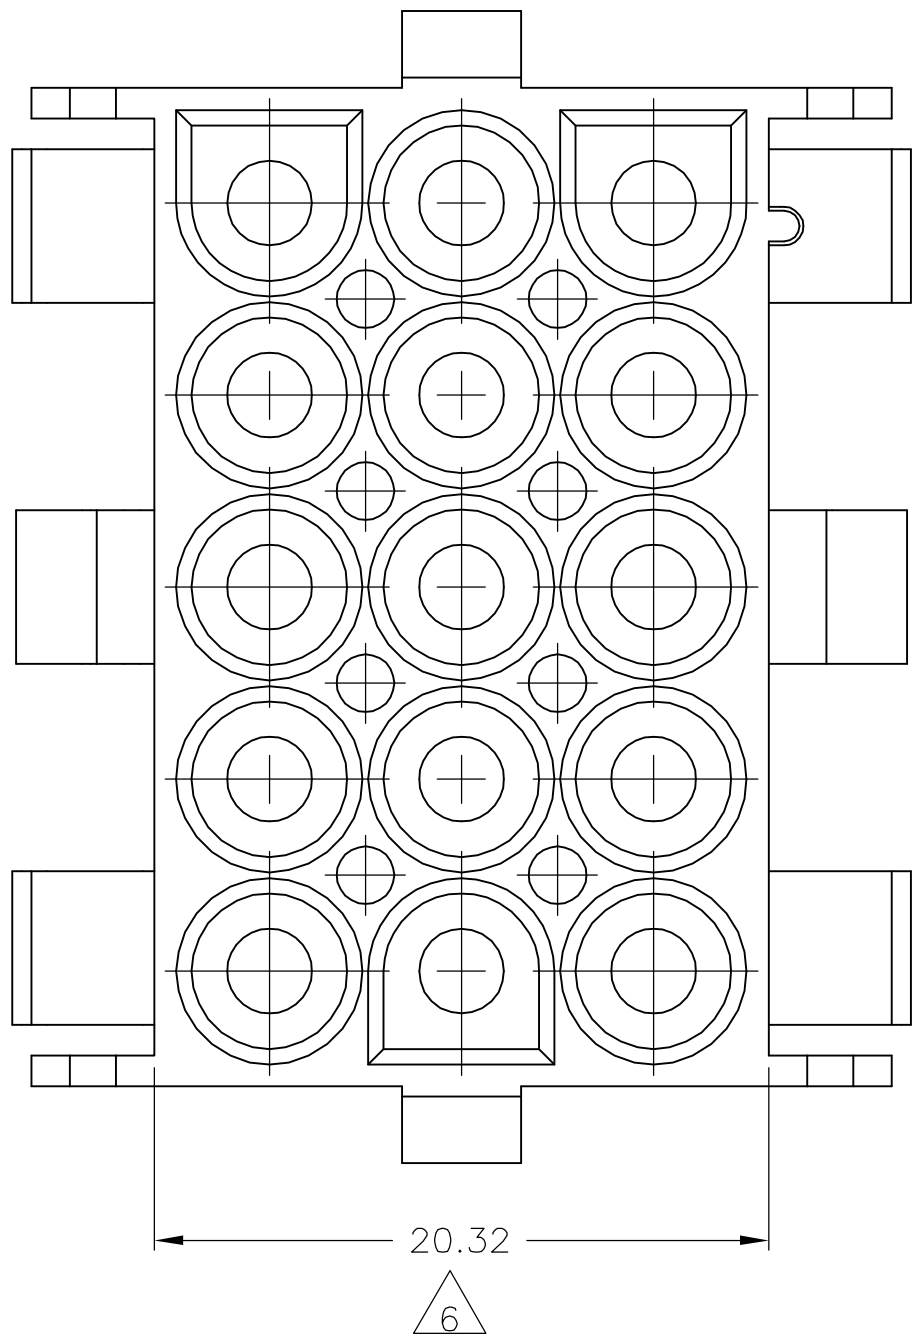
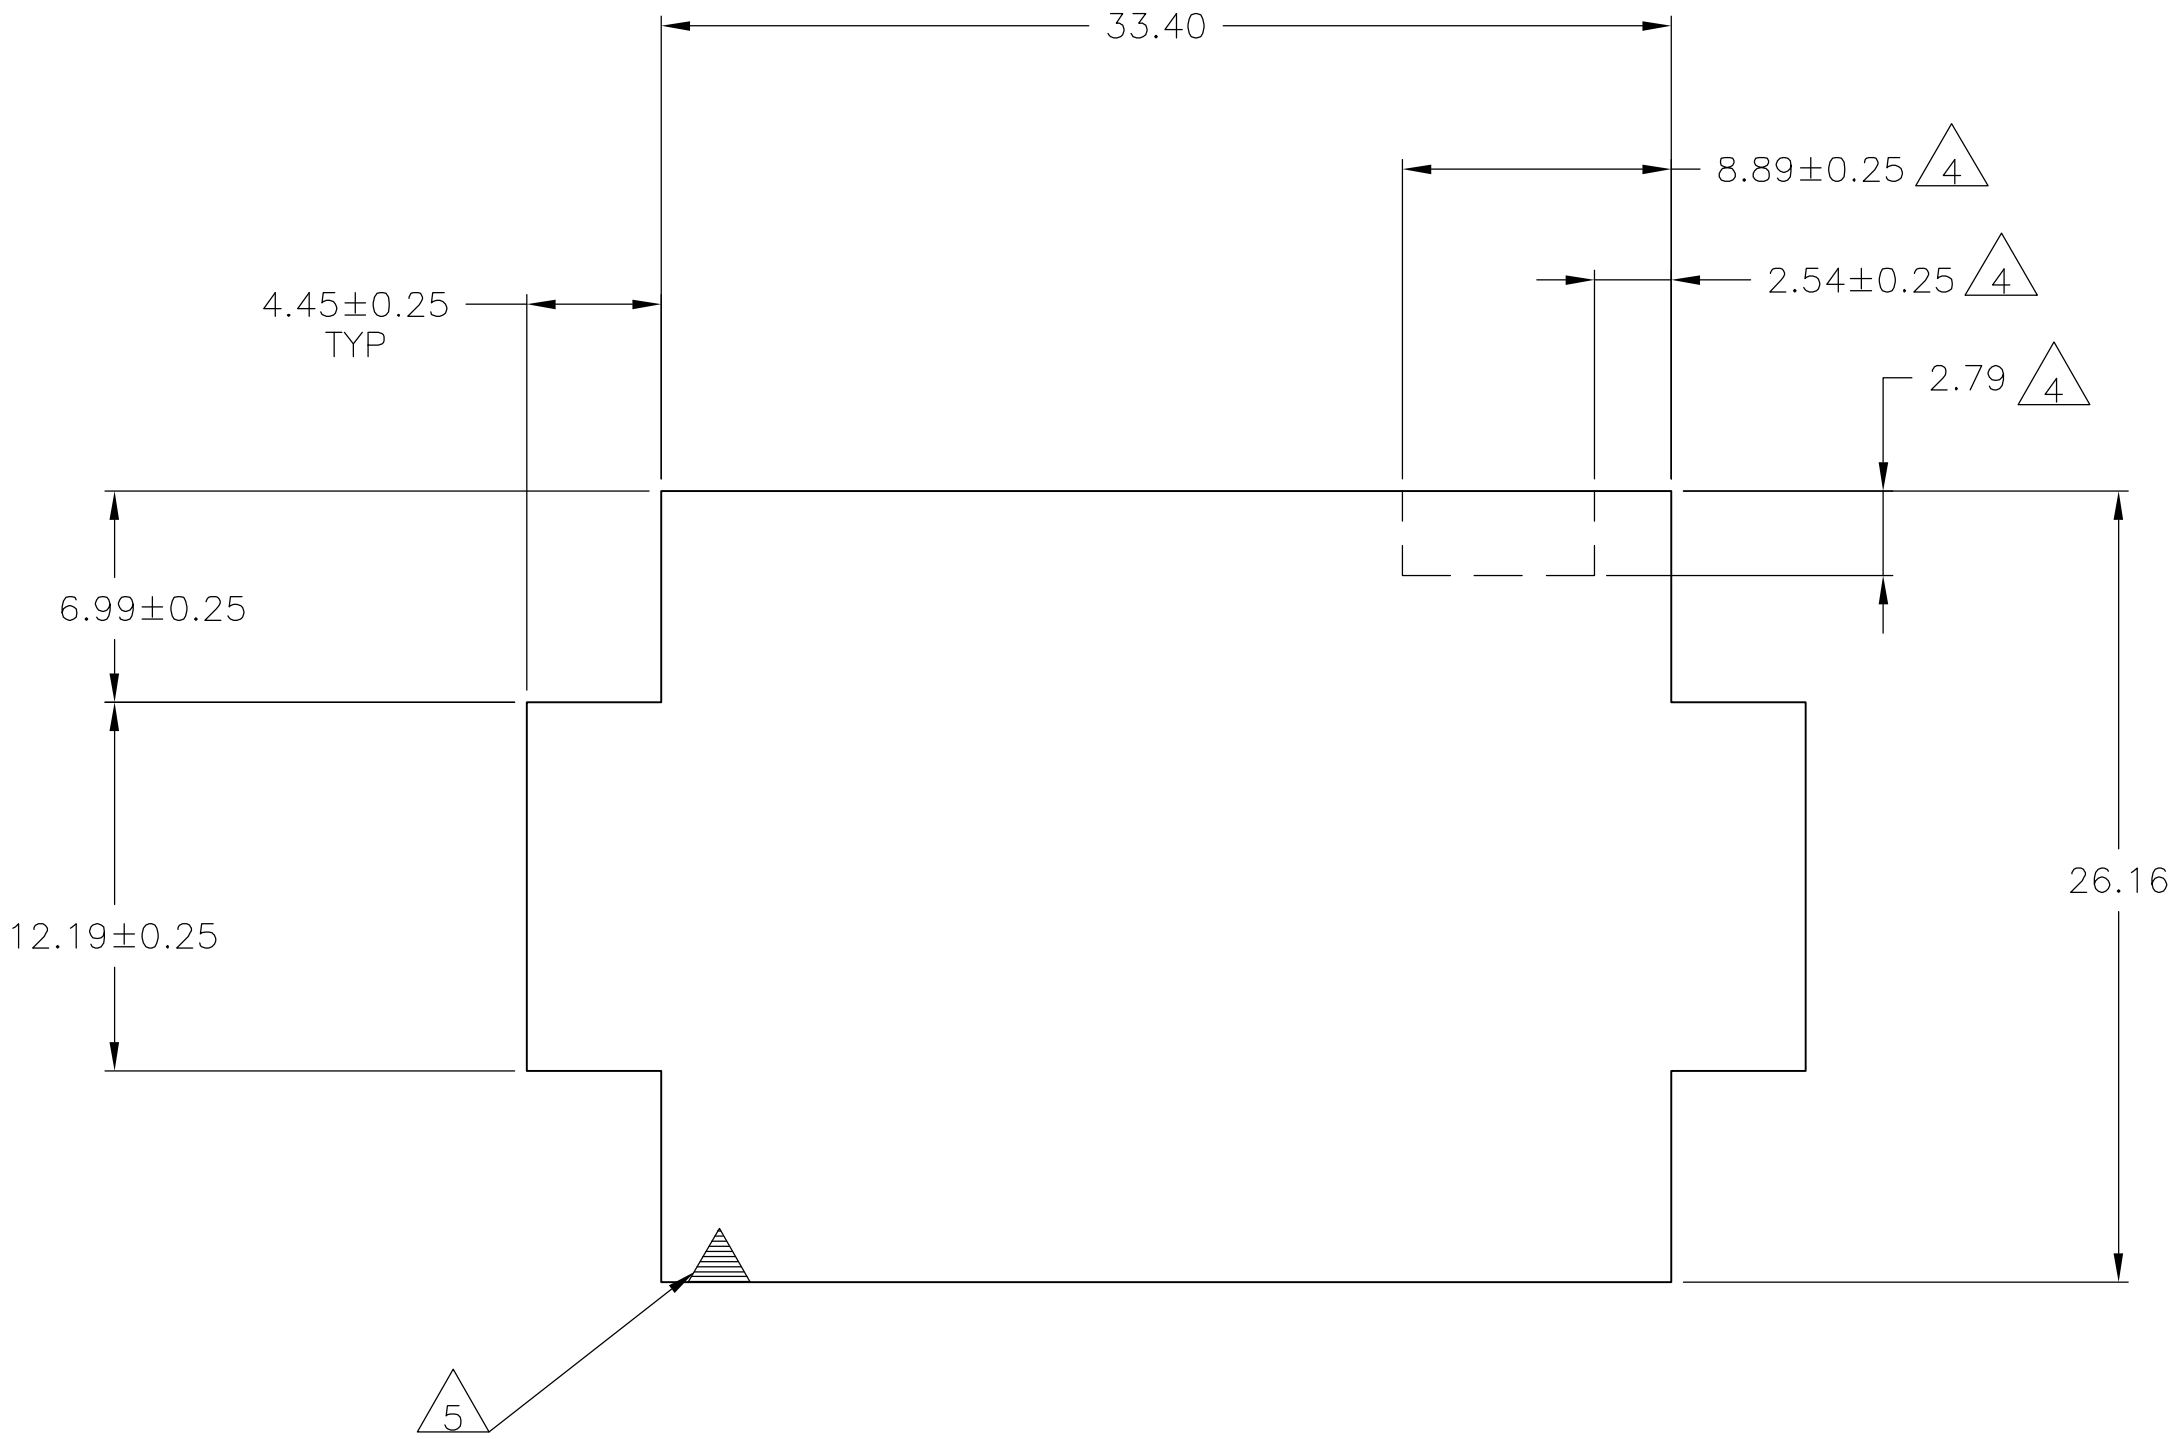


LOC		DIST		REVISIONS					
CM		53		P	LTR	DESCRIPTION	DATE	DWN	APVD
				U1	ECO-06-018902		22AUG06	BSV	GSR

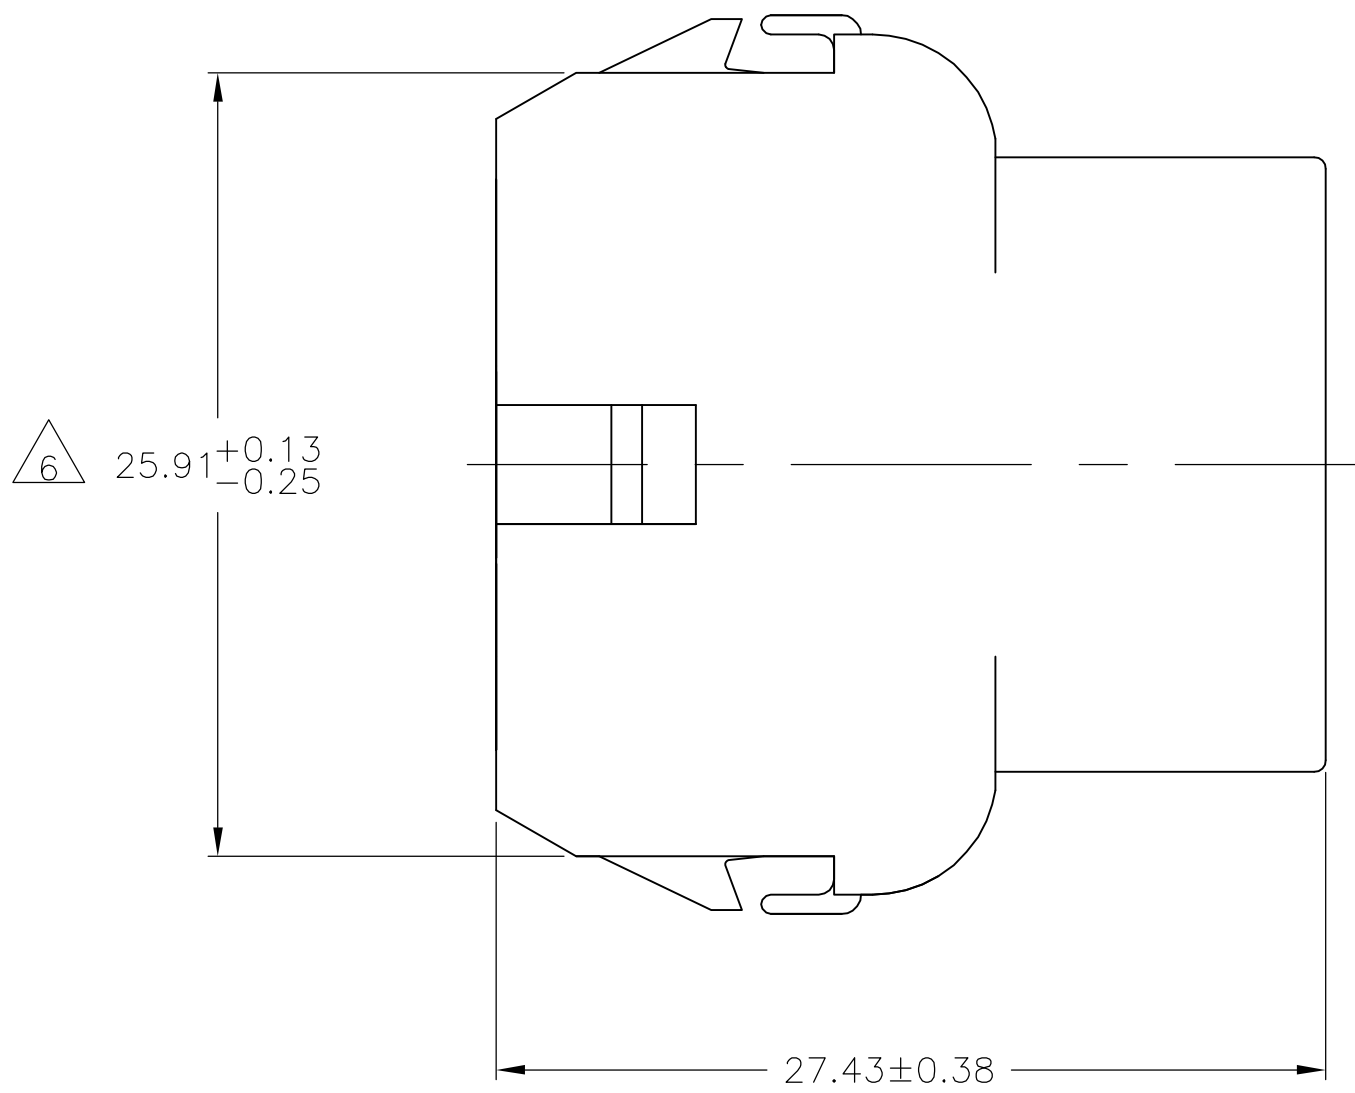


1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
2. RECOMMENDED PANEL THICKNESS 0.76 – 2.29.
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.


- △4 OPTIONAL FOR KEYING HOUSING IN PANEL.
- △5 CIRCUIT NUMBER 1 LOCATION.
- △6 DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
- △7 FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- △8 UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.

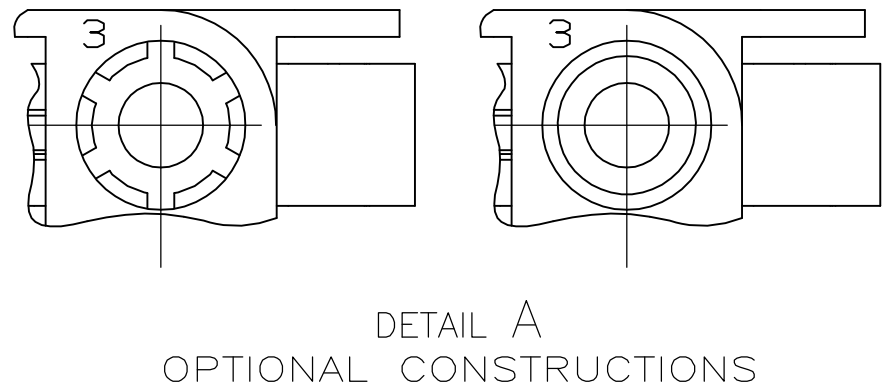

RECOMMENDED PANEL CUT OUT

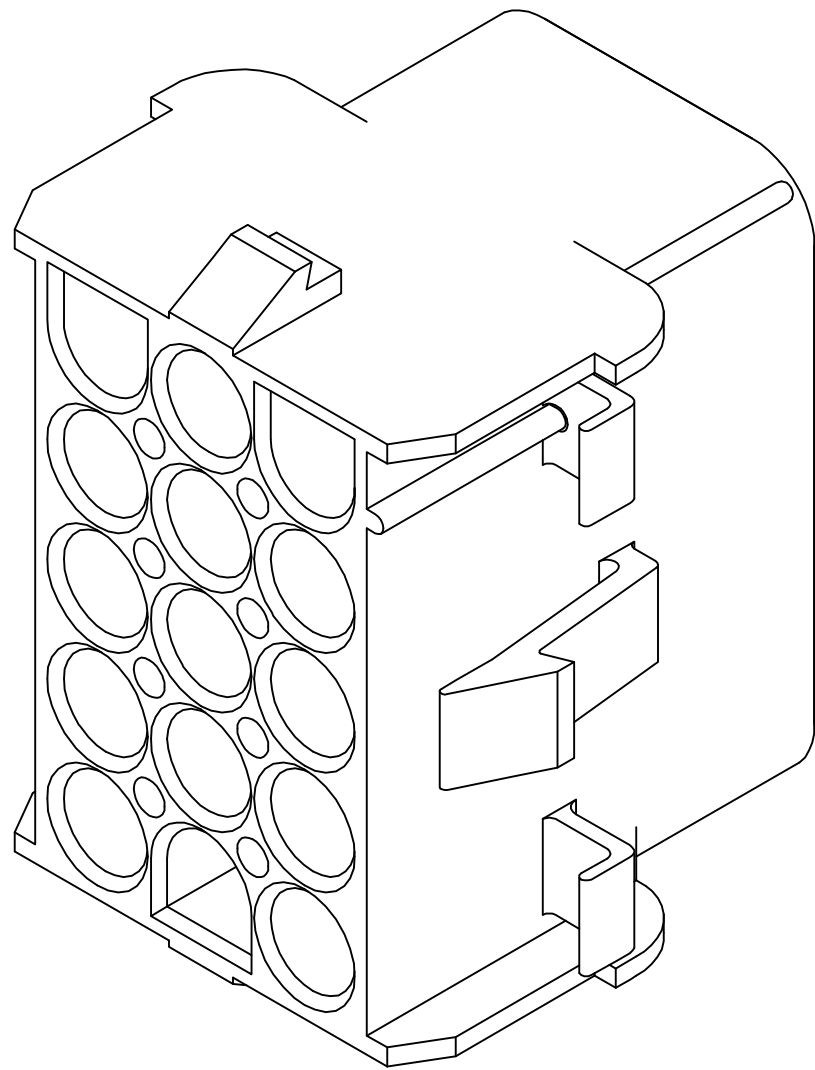

3-DIMENSIONAL MODEL
NTS

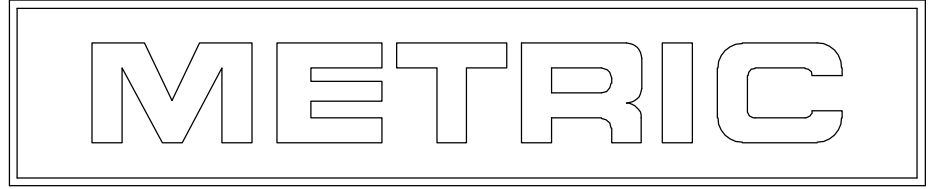

6.99	.275	33.40	1.315
4.45	.175	33.02	1.300
2.79	.110	27.43	1.080
2.54	.100	26.16	1.030
2.29	.090	25.91	1.020
0.76	.030	20.32	.800
0.38	.015	12.19	.480
0.25	.010	8.89	.350
0.13	.005	8.13	.320
MM	IN	MM	IN
CONVERSION TABLE			

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN K. WHITAKER 28MAY92				tyco Electronics Tyco Electronics Corporation Harriaburg, PA 17105-3608			
DIMENSIONS:				CHK R. SWING 28MAY92				NAME			
mm				APVD D. SELF 28MAY92				CAP, 15 CIRCUIT, UNIVERSAL MATE-N-LOK™			
TOLERANCES UNLESS OTHERWISE SPECIFIED:				PRODUCT SPEC				APPLICATION SPEC			
0 PLC ± -				1 PLC ± -				2 PLC ± 0.13			
3 PLC ± -				4 PLC ± -				ANGLES ± ± 1°			
MATERIAL NYLON, UL 94V-0				FINISH -				SIZE CAGE CODE DRAWING NO			
				WEIGHT -				A1 00779 C=350784			
				CUSTOMER DRAWING				SCALE 4:1 SHEET 1 OF 1 REV U1			