



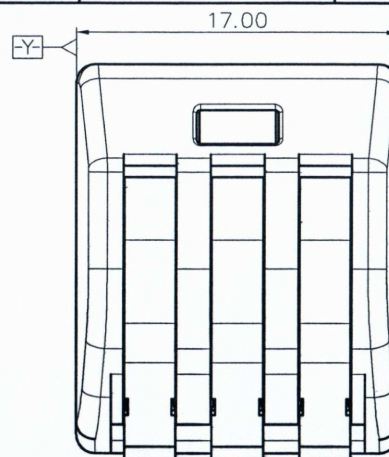

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

DG223 - 4.61 - 03P - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

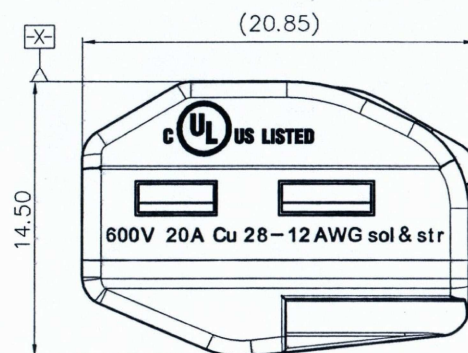

NOTES1:

UL Standard

1.Rated voltage/current : 600V / 20A

2.Wire range : 28~12AWG

VDE Standard

1.Rated voltage/current : 450V / 24A

2.Wire range : 0.2~2.5mm²

IEC Standard

1.Rated voltage/current : 450V / 32A

2.Wire range : 0.2~2.5mm²(str)0.2~4.0mm²(sol)

NOTES2:

1.Dimension shall be interpreted per
ASME Y14.5-2009

2.Pitch : 4.61mm, Poles : N=03P

3.Stripping length : 9~10mm




4.Withstanding voltage : AC2500V/1Min

5.Operating temperature: -40°C~+105°C

6.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm						
TO	Over	TO	Over	TO	Over	TO	Over	
6	10	30	60	100	150			0.1/10
6	10	30	60	100	150			<
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30		±2*

7.RoHS Compliance

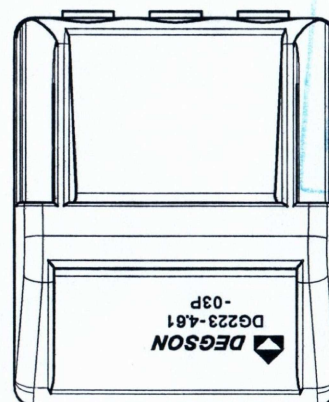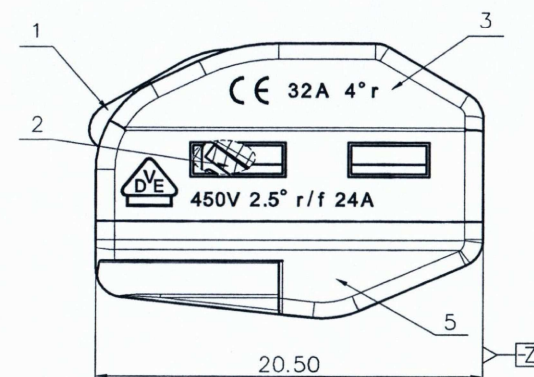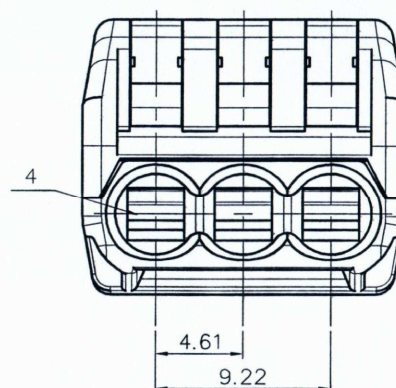

仅供参考图

签字:

日期:

16-17

ITEM	NAME OF PART	MATERIAL	NOTES
5	Housing	PA66	UL94V-0
4	Spring	Stainless steel	
3	Cover	PA66	UL94V-0
2	Current carrier	Copper alloy	Sn Plated
1	Button	POM	UL94HB

DETACHED LISTS	PART NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD: Aaron 16-17		NAME: DG223-4.61-03P-1Y-00A(H)	
	CHKD: Frank 16-17"			
	DRFT: MEK 07/08/16"		TITLE: CUSTOMER DRAWING	
			REV D0-1	
	THIRD ANGLE PROJECTION		DRAWING NO.: DG223-4.61-C02	
		SHEET 1/1		
		DO NOT SCALE DRAWING		
		SCALE 1:1		