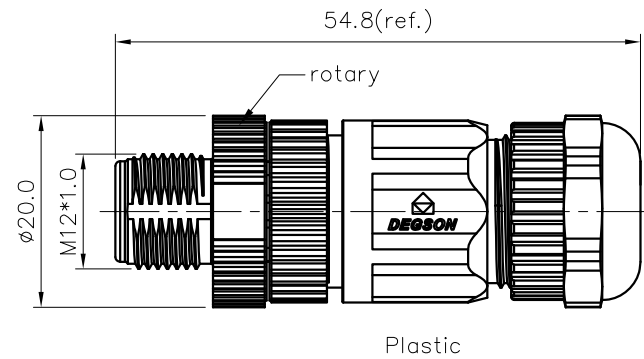



REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



Plastic

NOTES:


- Rated voltage/current :
3pin A: 250V / 4A
4pin A: 250V / 4A
5pin A: 60V / 4A
6pin A: 30V / 2A
8pin A: 30V / 2A
5pin B: 60V / 4A
4pin D: 250V / 4A
- Withstanding voltage :
3,4pin A: AC1500V/1Min
5pin A: AC1120V/1Min
6,8pin A: AC500V/1Min
5pin B: AC1120V/1Min
4pin D: AC1500V/1Min
- Levels of protection: IP67
- Wire range :
3pin A: 24~20AWG/0.25~0.52mm²
4pin A: 24~20AWG/0.25~0.52mm²
5pin A: 24~20AWG/0.25~0.52mm²
6pin A: 24~22AWG/0.25~0.34mm²
8pin A: 24~22AWG/0.25~0.34mm²
5pin B: 24~20AWG/0.25~0.52mm²
4pin D: 24~20AWG/0.25~0.52mm²
- Cable OD: 4~8mm
- Wire connection mode: screw
- Operating temperature: -25°C~+105°C
- RoHS Compliance

PB-M12X-XXP-MM-SL7001-00A(H)


Coding: A,B,D

Pin number: 03,04,05,
06,08


5pin B Coding

Pin Assignments
Front View


4pin D Coding

Pin Assignments
Front View


3pin A Coding

Pin Assignments
Front View


4pin A Coding

Pin Assignments
Front View


5pin A Coding

Pin Assignments
Front View

6pin A Coding

Pin Assignments
Front View

8pin A Coding

Pin Assignments
Front View

DETACHED LISTS	PART NO.: PBM12XXXXPMSL700100AH	NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME: PB-M12X-XXP-MM-SL7001-00A(H)		
	CHKD:			
	DRFT: LZ 2018.10.08	TITLE: CUSTOMER DRAWING	REV	D0-1
	THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SHEET 1/1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE 1:1