

Data Sheet

DIN-Standard Built-In Socket, Metal, with Protective Cap

Item - no. 53114320 (BP)

Item – no.. 53114321 (SP)

23.10.2012

Tension range:	max. 24 Volt
Max. current load:	max. 16 Ampere
Connectores:	flat terminals 6,3 mm
Plug-In dimension:	18 mm

Material Protective Cap:

Cap :	PA 6, black
Holder:	PA 6, black

Material DIN-Standard Built-In Socket:


Housing:	Al Cu Mg Pb bk
Nut :	Cu Zn 40 bk
Contact busbar spring:	Cu Sn 6 bk
Base :	PA 6.6 black
Socket contact	Cu Sn 6 silvered

**DIN-Standard Built-In Socket,
 Metal, with Protective Cap**

Item - no. 53114320 (BP)

Item – no.. 53114321 (SP)

23.10.2012

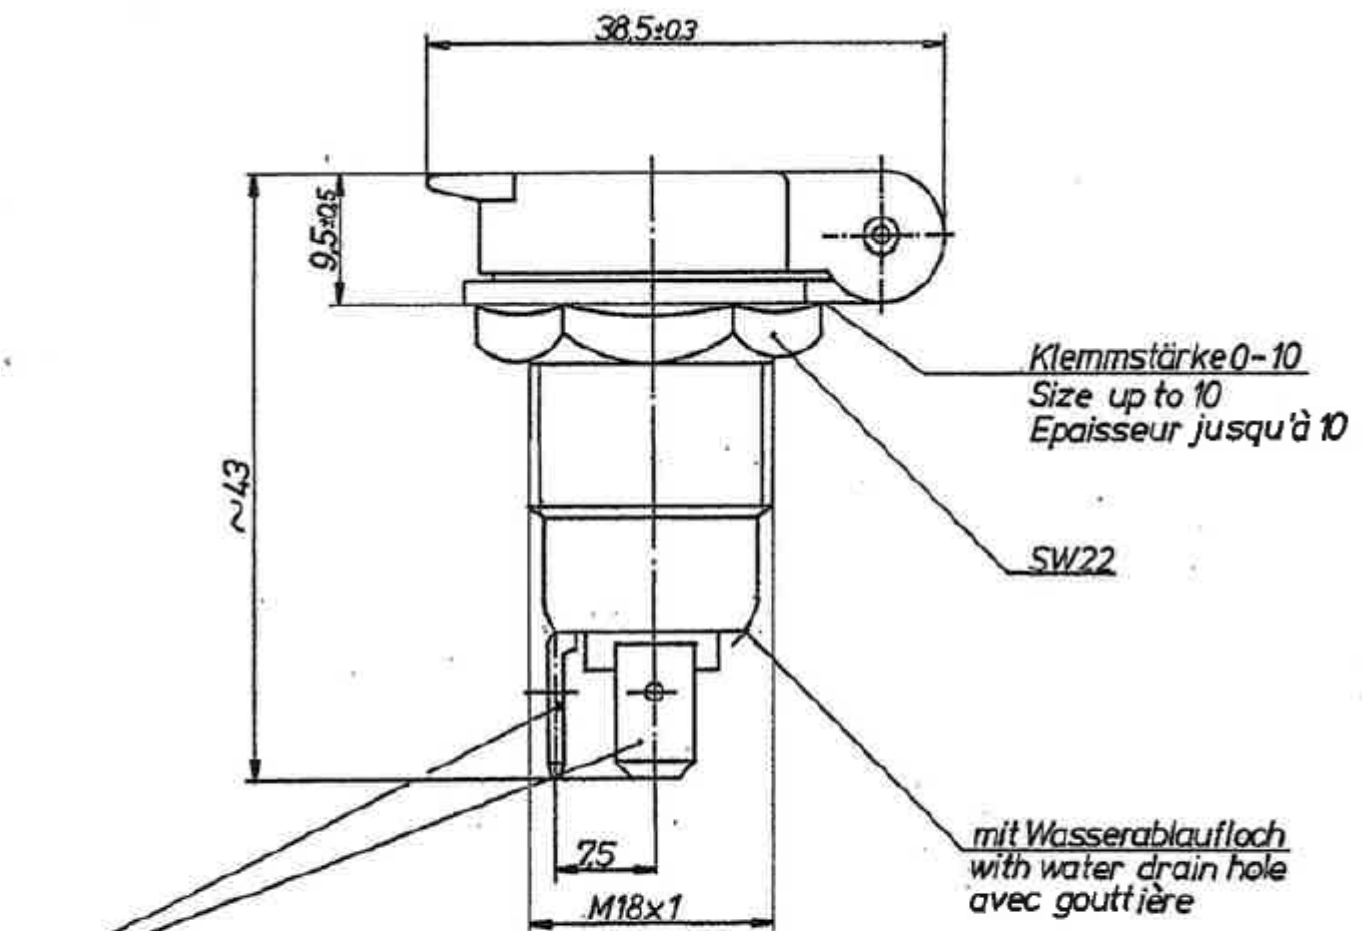

Passend für 2 pol. Fastin-Faston
 Steckhülsegehäuse AMP Nr. 180907-0

Suitable for 2 pole Fastin-Faston
 adapter plug housing AMP no. 180907-0

Propre à 2 pôles Fastin-Faston
 Carter d'adaptateur à douille AMP no. 180907-0