




2EDGK-7.5
2EDGK-7.62

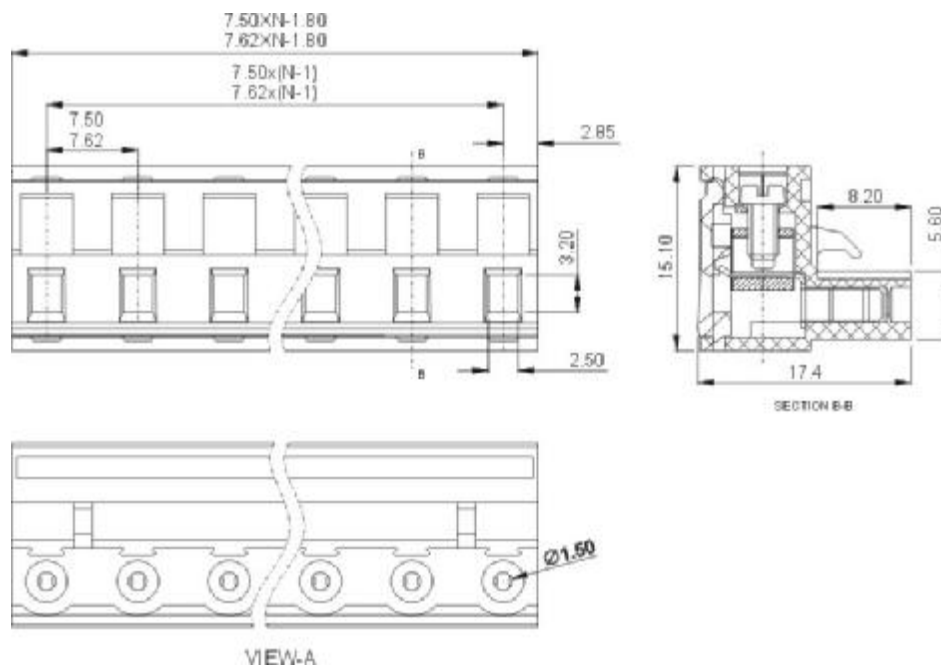

APPROVAL

Electrical

Standard

Rated voltage

Rated current

Wire range

Withstanding voltage



UL

300V

15A

28-12AWG

AC2500V/1Min

IEC

400V

20A

2.5mm²

Mechanical

Torque

0.4Nm(3.5Lb-In)

Ambient temperature

-40℃~+105℃

Strip length

7mm

Dimensions

Pitch

7.5mm(.295") 7.62mm(.300")

Poles

2P-12P

Material

Housing

PA66,UL94 V-0

Screws

M2.5,Steel, Cr³⁺Zn-plated

Contact


Phosphor bronze

Cage

Brass,Ni-plated

HOW TO ORDER :

	-			P	-	1		-	X	X	X	
									Customer Request			
Series number		No. of pole							Color			
									1	Grey	4	Green
									2	Blue	5	Orange
									3	Black	6	Red
											7	Trans Parent
											8	Yellow
											9	White



DEGSON ELECTRONICS CO., LTD.

NAME

2EDGK-7.5 2EDGK-7.62