






DEGSON ELECTRONICS CO., LTD.


Product Specification



2EDGKR-5.0
2EDGKR-5.08

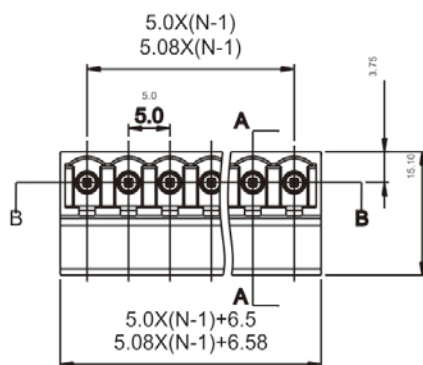

Section B-B



APPROVAL



Electrical

Standard

UL

IEC

Rated voltage

300V

320V

Rated current

15A

20A

Wire range

28-12AWG

2.5mm²

Withstanding voltage

AC2500V/1Min

Mechanical

Torque

0.4Nm(3.5Lb-In)

Ambient temperature

-40°C~+105 °C

Strip length

7mm

Dimensions

Pitch

5.0mm(.197") 5.08mm(.200")

Poles

2P-24P

Material

Housing

PA66,UL94 V-0

Screws

M2.5,Steel,Cr³⁺Zn- plated




Contact

Copper

Cage

Brass,Ni-plated

HOW TO ORDER :

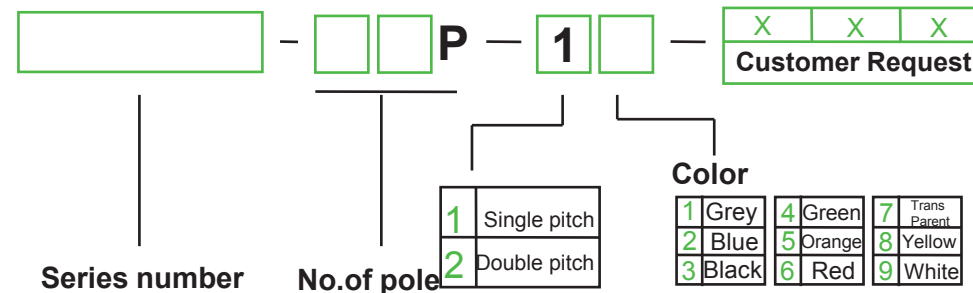

THIRD ANGLE PROJECTION



DEGSON ELECTRONICS CO., LTD.

NAME

2EDGKR-5.08