


Technical Datasheet

tasker® C164 – SCART Video/Audio Cable

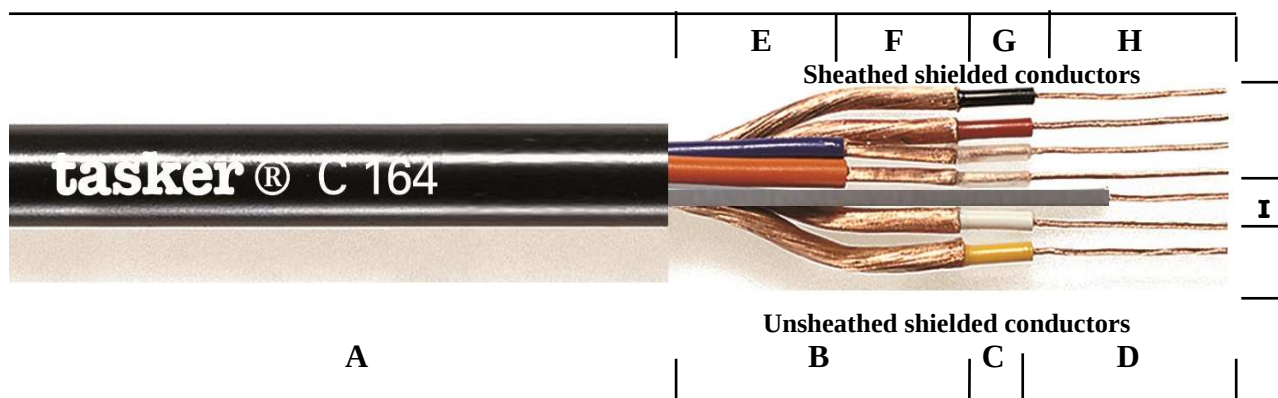

CATEGORY Special Video/Audio Cable (See Video Catalogue)
APPLICATIONS SCART and other Audio/video installations.

A: Black Soft **PVC** Sheath. Outer Diam. Ø 9,50 (±0,20) mm.

4x Unsheathed shielded conductors:

B: O.F.C. red copper spiral shielding conductors.
C: **PVC** cores insulation, colored Black, Red, White, Yellow.
 Diam. 1,80 (±0,20) mm
D: O.F.C. red copper Stranded formation 19x0,10 mm.
 Nom. Cross Section 4x0,15 mm².

2x Sheathed shielded conductors:

E: Soft **PVC** inner sheaths. Colored Blue and Red.
 Diam. Ø 2,30 (±0,20) mm.
F: O.F.C. red copper spiral shielding covering 100%
G: Transparent **PVC** cores insulation, diam. 1,20 (±0,20) mm
H: O.F.C. red copper Stranded formation 19x0,10 mm.
 Nom. Cross Section 2x0,15 mm².

Free Conductor:

I: Grey **PVC** sheath. Diam. Ø 2,10 (±0,20) mm.
 O.F.C. red copper Stranded formation 19x0,10 mm.
 Nom. Cross Section 1x0,15 mm².



MILAN S.r.l. a socio unico

Head Office – Export department:

Viale Europa, 74
20090 Cusago (MI) Italy
T. +39 02 9039.4556-4158
F. +39 02 9039.4551
www.taskercables.com

Ufficio Commerciale e Centro Distribuzione

Viale Europa 72 Strada F12
20090 Cusago (MI) Italy
T. +39 02 9039.0037-0059
F. +39 02 9039.0049
www.tasker.it

MARKING
CUSTOM
PRODUCTION

C/164 - TASKER

This product may be custom produced also in **LSZH, PE, PUR**, with or without Metallic Armor.

General Properties

Conductors Resistance	138 Ω/Km
Capacity Core/Shield for 1,20 dielectric Ins.	300 pF/m
Capacity Core/Shield for 1,80 dielectric Ins.	215 pF/m
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio
Impiego		Outdoor Limited	Esterno Limitato
		Outdoor	Esterno
		Outdoor Direct Burial	Esterno Interrato

INSTALLATION	X	Fixed	Fissa
Posa	X	Restricted Mobile	Mobile Limitata
		Mobile	Mobile
		Mobile in Drag Chain	Mobile in Catena

INFORMATION	X	RoHS2 Compliant
Informazioni	X	Ver. A / 16.05.17