


CL-SM40P


High Efficiency, High Quality PV Module

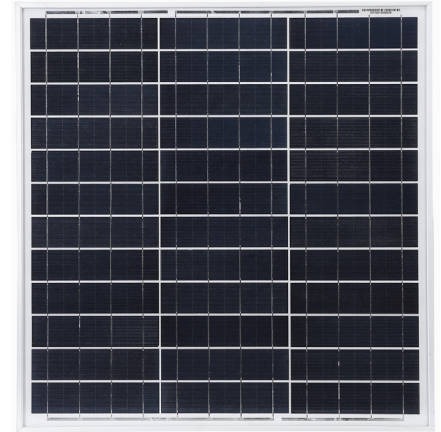


Electrical Characteristics	CL-SM40P
Maximum power (P _{max})	40W
Voltage at P _{max} (V _{mp})	18.2V
Current at P _{max} (I _{mp})	2.22A
Open-circuit voltage (V _{oc})	22.6V
Short-circuit current (I _{sc})	2.34A
Temperature coefficient of V _{oc}	-(0.40 ± 0.05)%/ °C
Temperature coefficient of I _{sc}	(0.065 ± 0.01)%/ °C
Temperature coefficient of power	-(0.5±0.05)%/ °C
NOCT (Air 20°C; Sun 0.8kW/m ² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	600V DC
Power tolerance	+ 3%
Cells	multicrystalline silicon solar cell
No. of cells and connections	36(3X12)
Module Dimension	540mm[31.50in.]x510mm[13.78in.]x25mm[0.98in.]
Weight	3.10kg[6.82lbs]

* STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C
* Specifications are subject to change without notice at any time.


Module Diagram

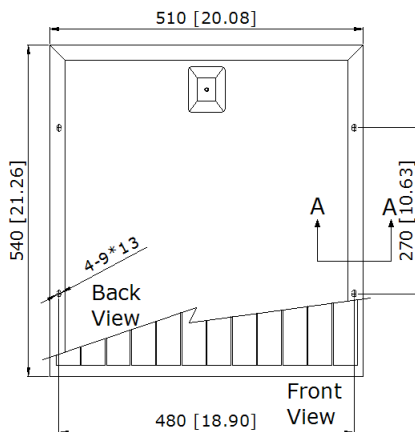

Dimensions in brackets are in inches.
Un-bracketed dimensions are in millimeters.
Unit:mm[in.]





Junction Box
Top View (Lid open)



Section A-A

I-V Curves

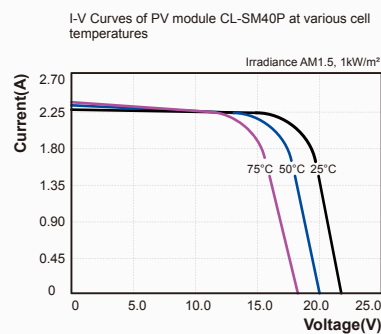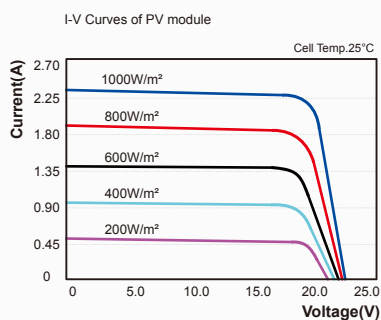

Key Features:

- High module efficiency and stable power output
- Based on leading process technology
- Outstanding electrical performance under high temperature conditions or low irradiance conditions
- Easy of installation and all-weather applications
- 5 years product warranty(materials and workmanship)
- 20 years module power output warranty
- Peak power of single module is guaranteed in +3% power tolerance
- Strong framed module,passing loaded test of 5400 Pa (IEC61215 2nd)
- The manufacture is certified for ISO 9001:2008

Product's Guarantee

- 15 years module power output no less 90%
- 20 years module power output no less 80%

Applications

- Off grid residential roof-tops
- Off grid commercial/industrial roof-tops
- Rural area applications
- Solar power system
- Other off-grid applications



CELLEVIA POWER