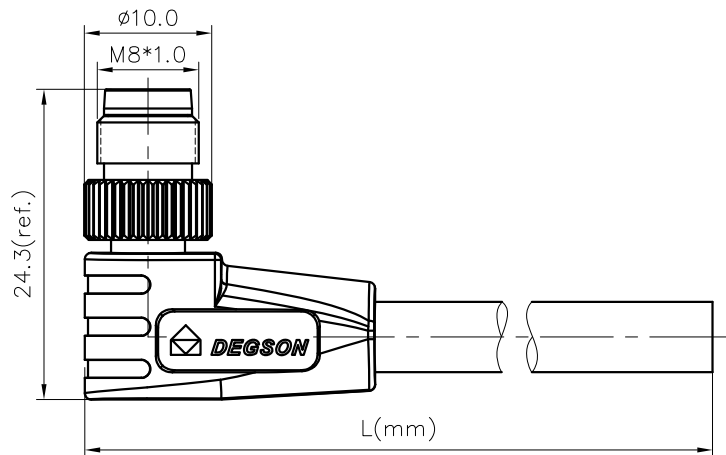
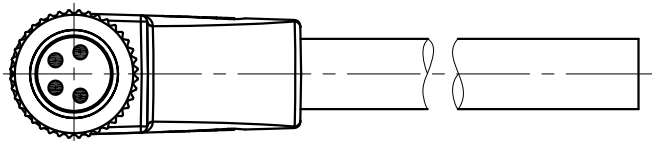


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------



PM-M8X-XXP-MM-SR7XXX-00A(H)

Coding: A,B

Pin number: 03,04,
05,06,08Cable jacket:
A: PVC UL2517;
B: PUR UL20549Cable length
01: 1M
...
99: 99M
The line grows business trip:
01~05m: ± 50mm
06~10m: ± 100mm
11~30m: ± 200mm
31~99m: ± 500mm

NOTES:

- Rated voltage/current : 3pin: 60V / 3A
4pin: 60V / 3A
5pin: 30V / 3A
6pin: 30V / 1.5A
8pin: 30V / 1.5A

2. Withstanding voltage : AC800V/1Min

3. Levels of protection: IP67

4. Cable specifications :


3pin: 3C*24AWG/0.25mm², UL2517/UL205494pin: 4C*24AWG/0.25mm², UL2517/UL205495pin: 5C*24AWG/0.25mm², UL2517/UL205496pin: 6C*26AWG/0.14mm², UL2517/UL205498pin: 8C*26AWG/0.14mm², UL2517/UL20549

5. Wire connection mode: soldering


6. Operating temperature: -40°C~+85°C

7. RoHS Compliance


3pin A Coding

Pin Assignment
Front View


4pin A Coding

Pin Assignment
Front View


5pin B Coding

Pin Assignment
Front View

6pin A Coding

Pin Assignment
Front View

8pin A Coding

Pin Assignment
Front View

						8	Red		
						7	Blue		
					6	Pink	6	Pink	
				5	Gray	5	Gray	5	Gray
4	Black	4	Black	4	Black	4	Black	4	Yellow
3	Blue	3	Blue	3	Blue	3	Blue	3	Green
		2	White	2	White	2	White	2	Brown
1	Brown	1	Brown	1	Brown	1	Brown	1	White
Conn	Wire Color	Conn	Wire Color	Conn	Wire Color	Conn	Wire Color	Conn	Wire Color
Pin Out		Pin Out		Pin Out		Pin Out		Pin Out	

DETACHED LISTS	PART NO.: PMM8XXXPMMSR7XXX00AH		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:		NAME: PM-M8X-XXP-MM-SR7XXX-00A(H)			
	CHKD:					
	DRFT: LZ 2018.09.07		TITLE: CUSTOMER DRAWING		REV	D0-1
	 THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXX-XX-CXX		SHEET	1/1
			 MM (INCH)	DO NOT SCALE DRAWING	SCALE	1:1