


# DURACELL®

# DL2430

Lithium/Manganese Dioxide Battery

Li/MnO<sub>2</sub>

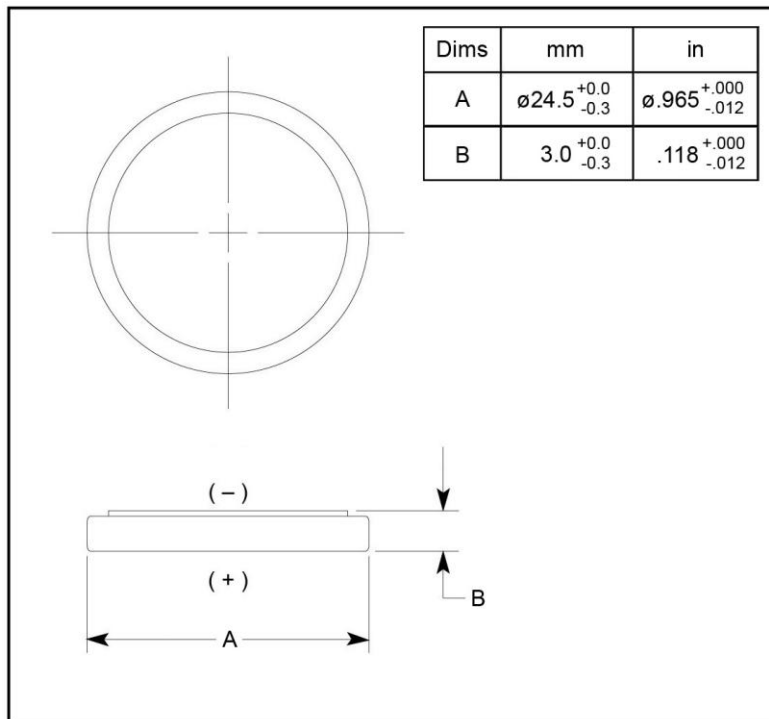

## SPECIFICATIONS

**Nominal Voltage:** 3.0 V

**Typical Voltage:** 3.1 – 3.3 V

**Rated Capacity:** 270 mAh on  
15 k $\Omega$  to 2.0 V


**Average Weight:** 4.5 g (0.159 oz.)

**Terminals:** Flat


**Operating Temp. Range:** -20°C to 60°C  
(-4°F to 140°F)

**NEDA/ANSI:** 5011LC  
**IEC:** CR2430

## Discharge Characteristics

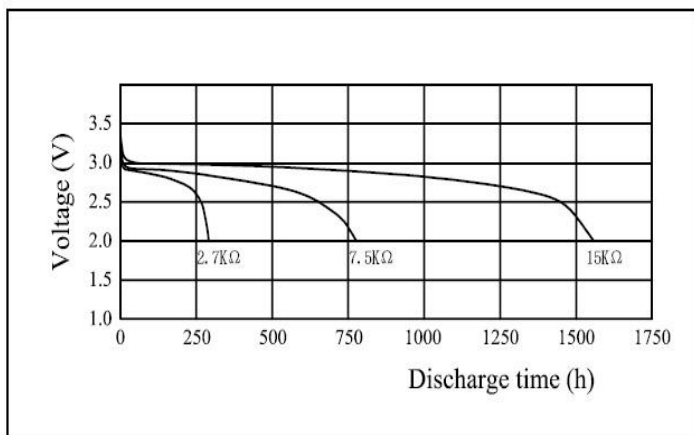

## Temperature Characteristics

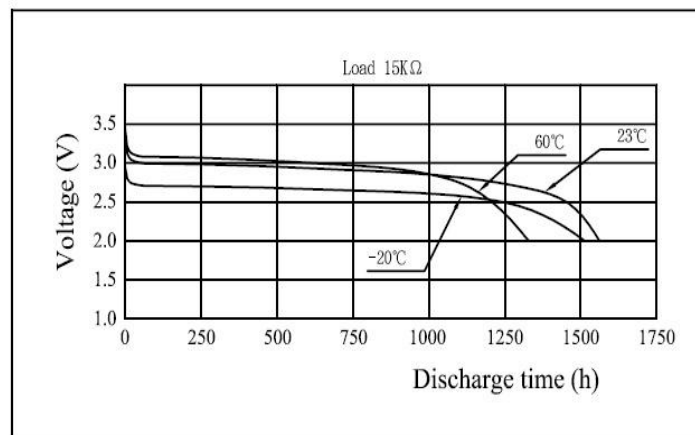

# DURACELL®

BATTERIES

Berkshire Corporate Park  
Bethel, CT. 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
[www.duracell.com](http://www.duracell.com)

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.


# DURACELL®

# CR2430


Lithium/Manganese Dioxide Battery

Li/MnO<sub>2</sub>


## Load vs. Operating Voltage

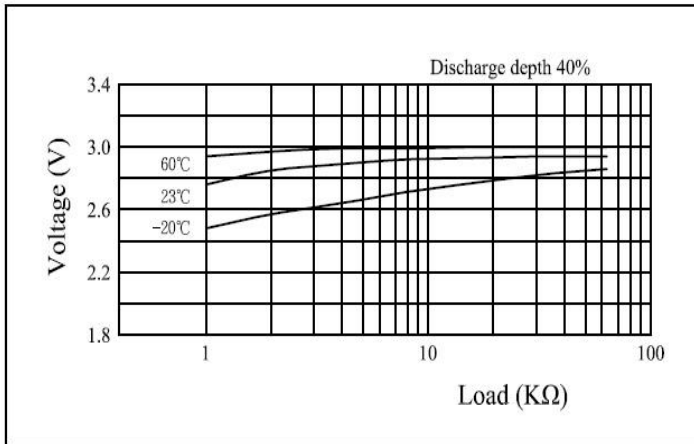


## Load vs. Capacity

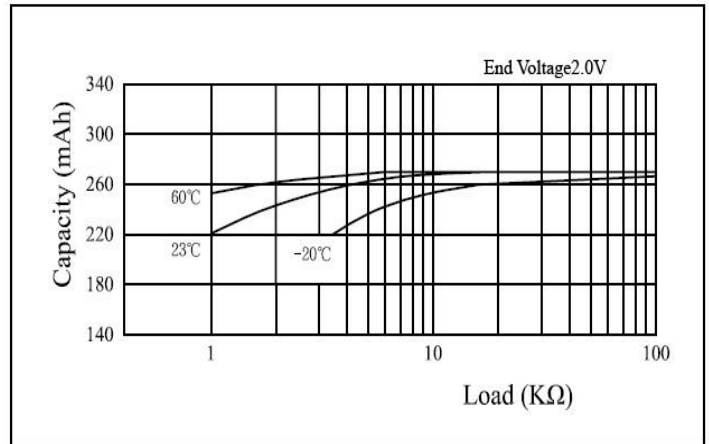

## Pulse Discharge Characteristics

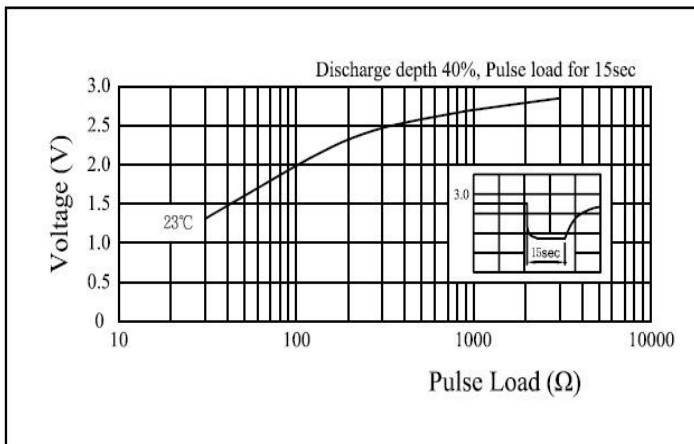

## Storage Characteristics

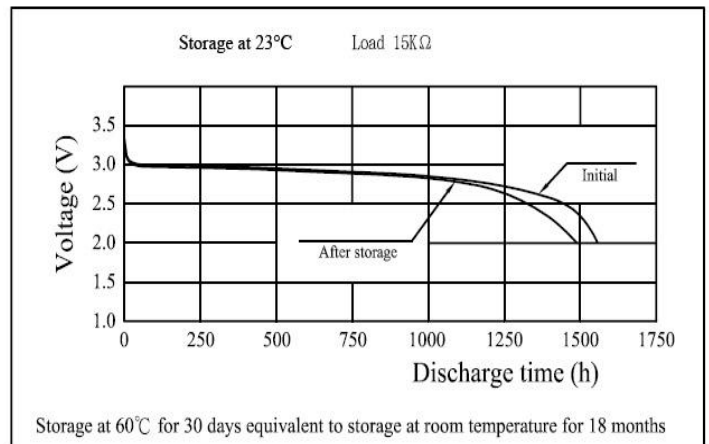

# DURACELL®

BATTERIES

Berkshire Corporate Park  
Bethel, CT. 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
[www.duracell.com](http://www.duracell.com)

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.