

DII gG 20A/500V



Specifications

ETI Code	002312406
Description	DII gG 20A/500V
Weight	.03
Level	Fuse links gG
Rated current (A)	20
Type	D
Size	DII
Characteristics	gG
Rated AC voltage (V)	500
Rated DC voltage (V)	250
Dimensions	E27
Indicator	Top fuse status indicator
Breaking capacity AC (kA)	50
Breaking capacity DC (kA)	8
Standards	DIN EN 60269-1, DIN EN 60269-3
Application	For cable protection
Breaking capacity AC (kA)	50
Breaking capacity DC (kA)	8
Dimensions	E27
Indicator	Top fuse status indicator
Standards	DIN EN 60269-1, DIN EN 60269-3

[Online product page](#)

Other documentation




[Technical data catalogue](#)
[COM_PRODUCT_Certificate](#)
[EU declaration](#)




ETIM international clasification

Application	For cable protection
Nominal rated current	20A
Nominal rated voltage	500V
Release characteristic	Time-lag
Colour code	Blue
Construction size	DII
Type of fuse status indicator	Top fuse status indicator
Breaking capacity	50
Rated voltage at DC	250


Cut-off current characteristics

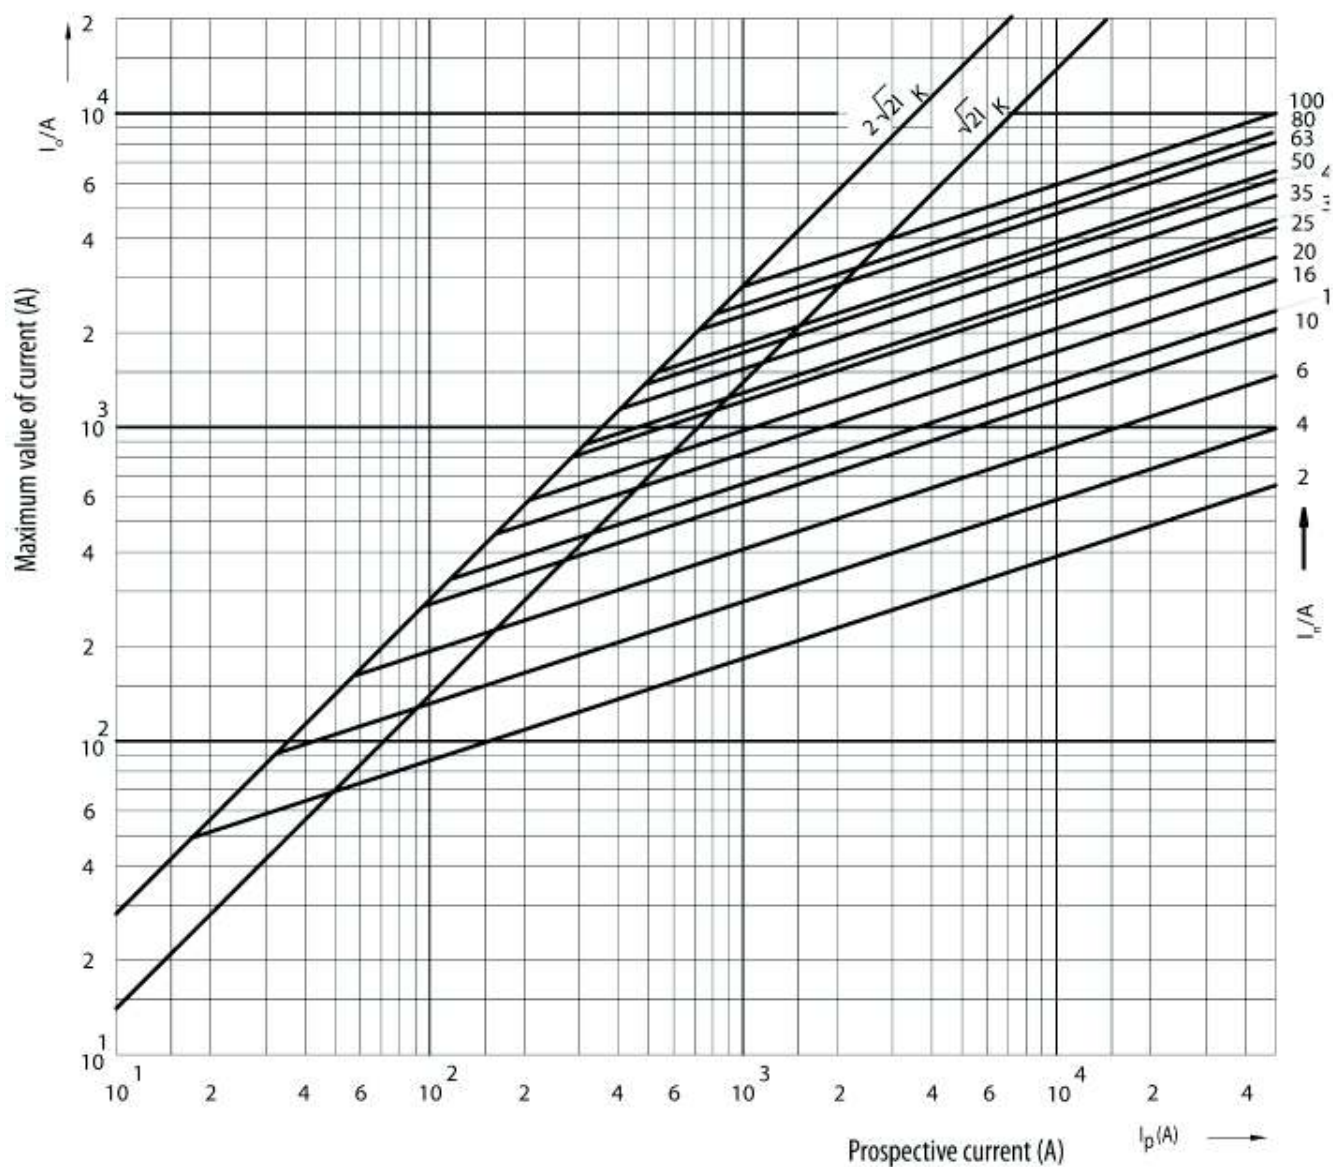


Melting energy characteristics

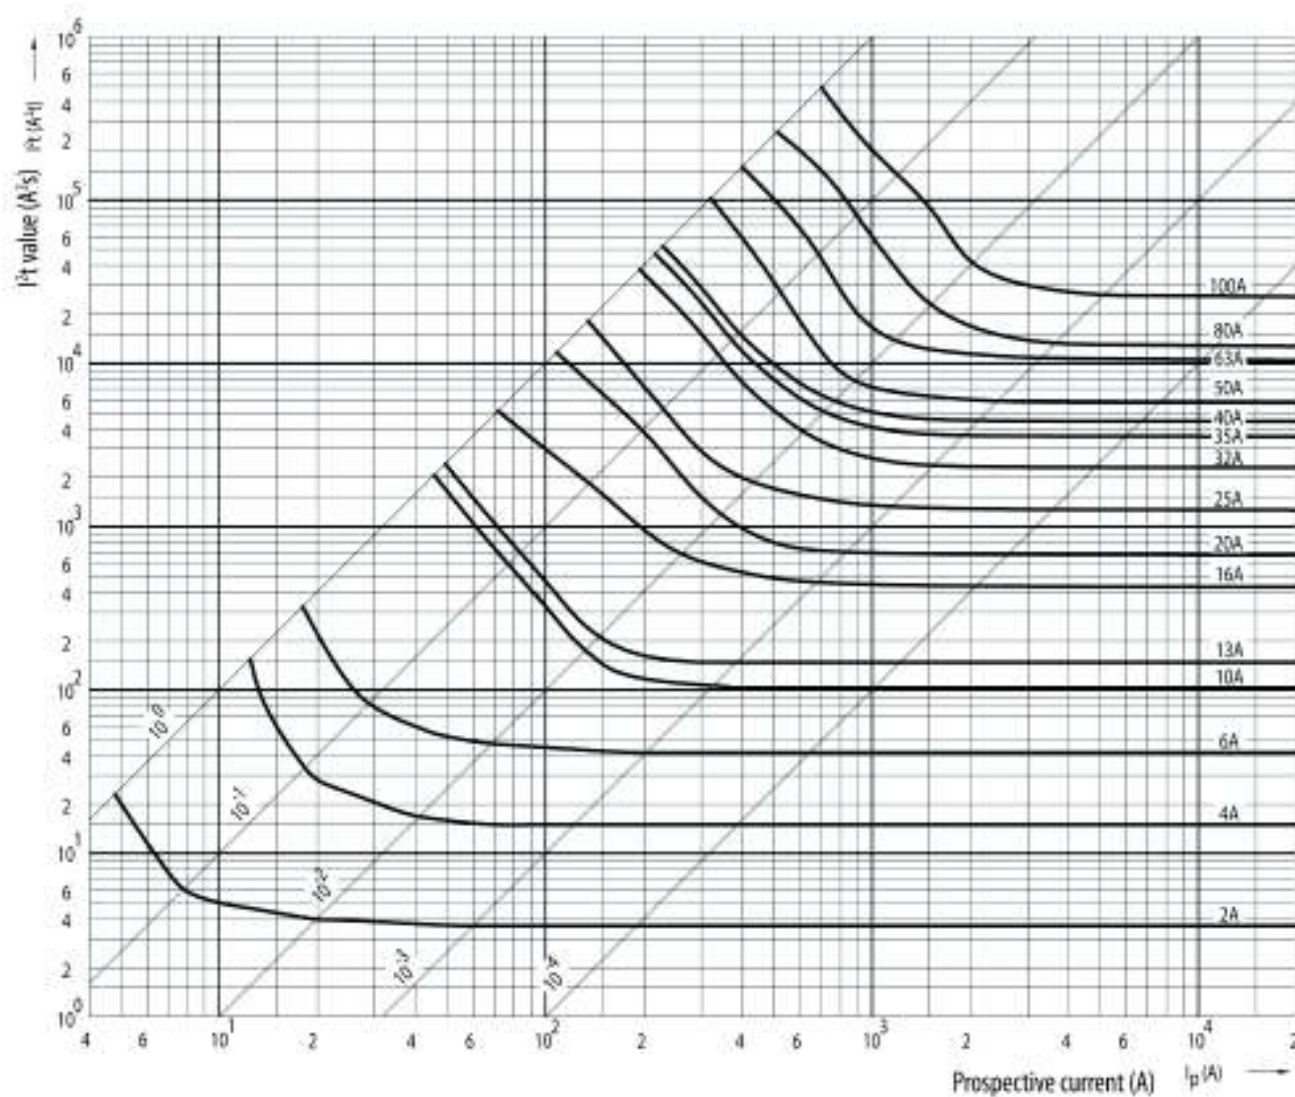

Time current characteristics

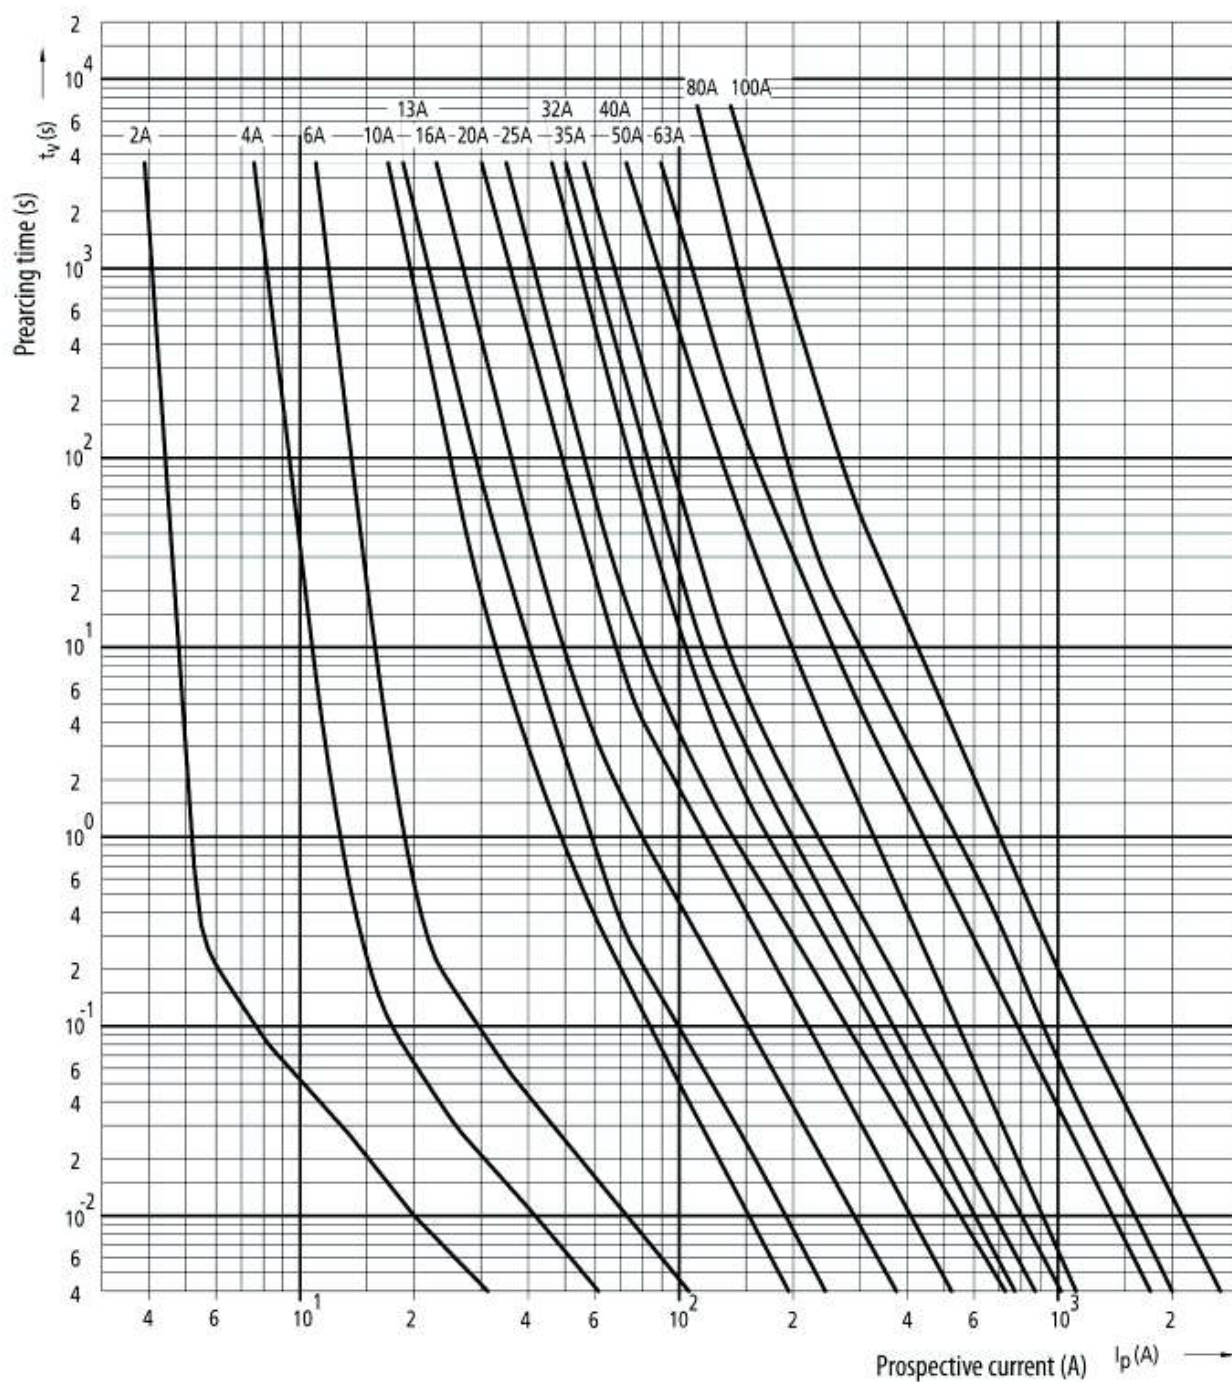

Dimension drawing

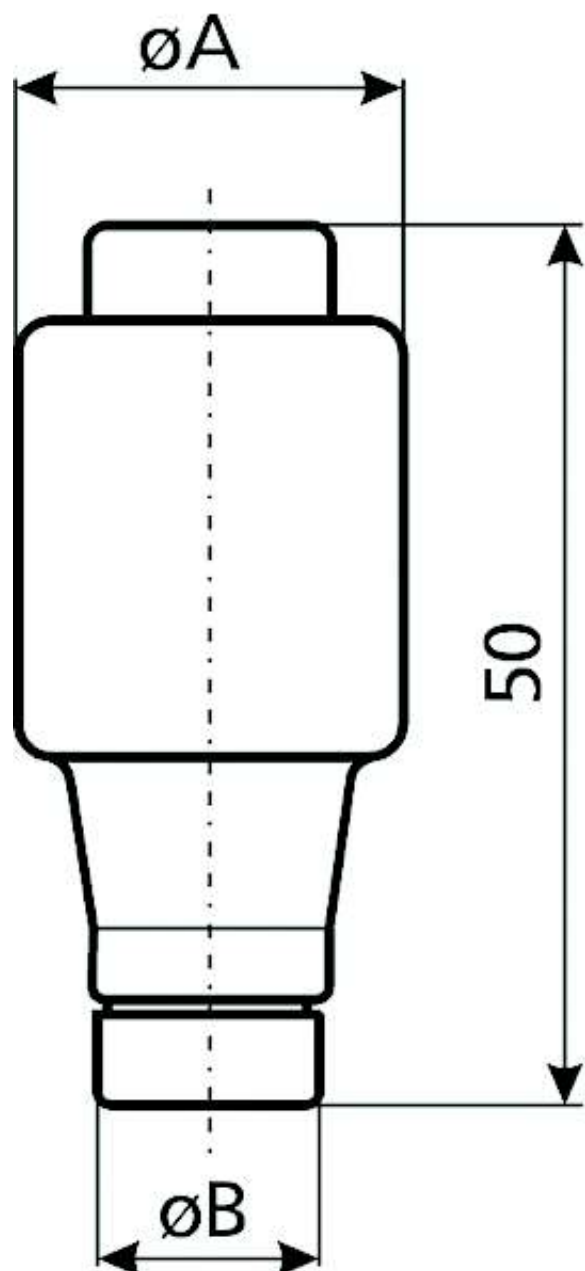

[A]	$\varnothing A$	$\varnothing B$
2	21,5	6
4	21,5	6
6	21,5	6
10	21,5	8
13	21,5	8
16	21,5	10
20	21,5	12
25	21,5	14