

DIII gG 35A/500V



Specifications

ETI Code	002313401
Description	DIII gG 35A/500V
Weight	51
Level	Fuse links gG
Rated current (A)	35
Type	D
Size	DIII
Characteristics	gG
Rated AC voltage (V)	500
Rated DC voltage (V)	250
Dimensions	E33
Indicator	Top fuse status indicator
Breaking capacity AC (kA)	50
Breaking capacity DC (kA)	8
Standards	DIN EN 60269-1, DIN EN 60269-3
Application	For cable protection
Breaking capacity AC (kA)	50
Breaking capacity DC (kA)	8
Dimensions	E33
Indicator	Top fuse status indicator
Standards	DIN EN 60269-1, DIN EN 60269-3

Online product page 

Other documentation




Technical data catalogue
EU declaration




ETIM international clasification


Application	For cable protection
Nominal rated current	35A
Nominal rated voltage	V
Release characteristic	
Colour code	
Construction size	DIII
Type of fuse status indicator	Top fuse status indicator
Breaking capacity	50
Rated voltage at DC	250
Max. rated operation voltage Ue AC	500

Cut-off current characteristics

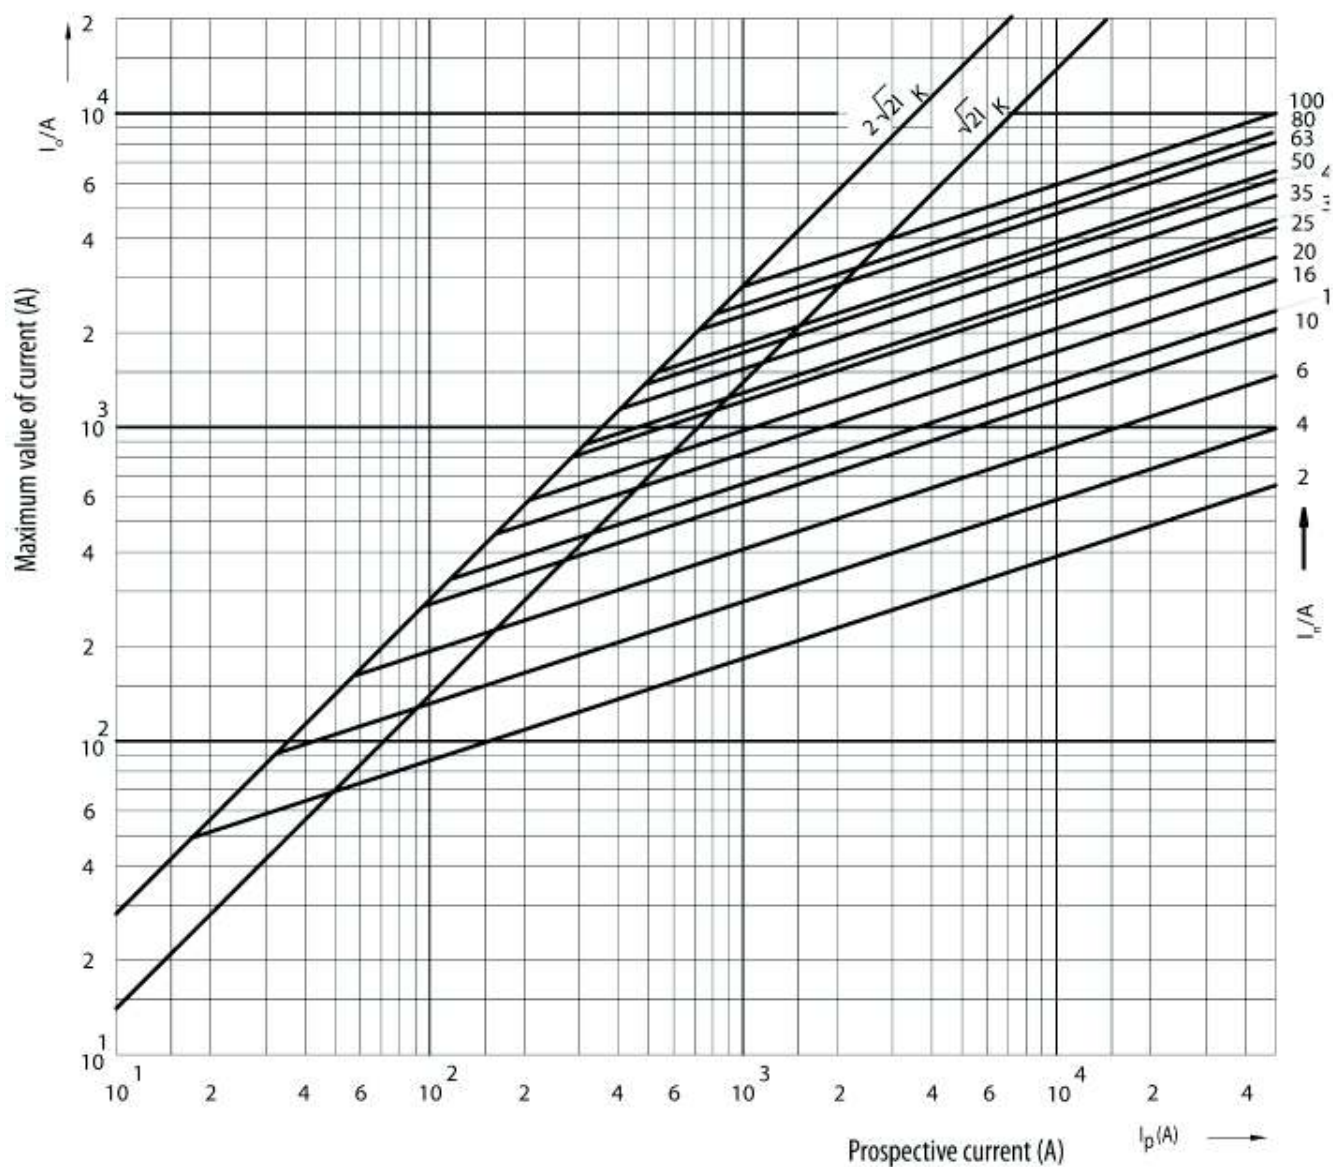

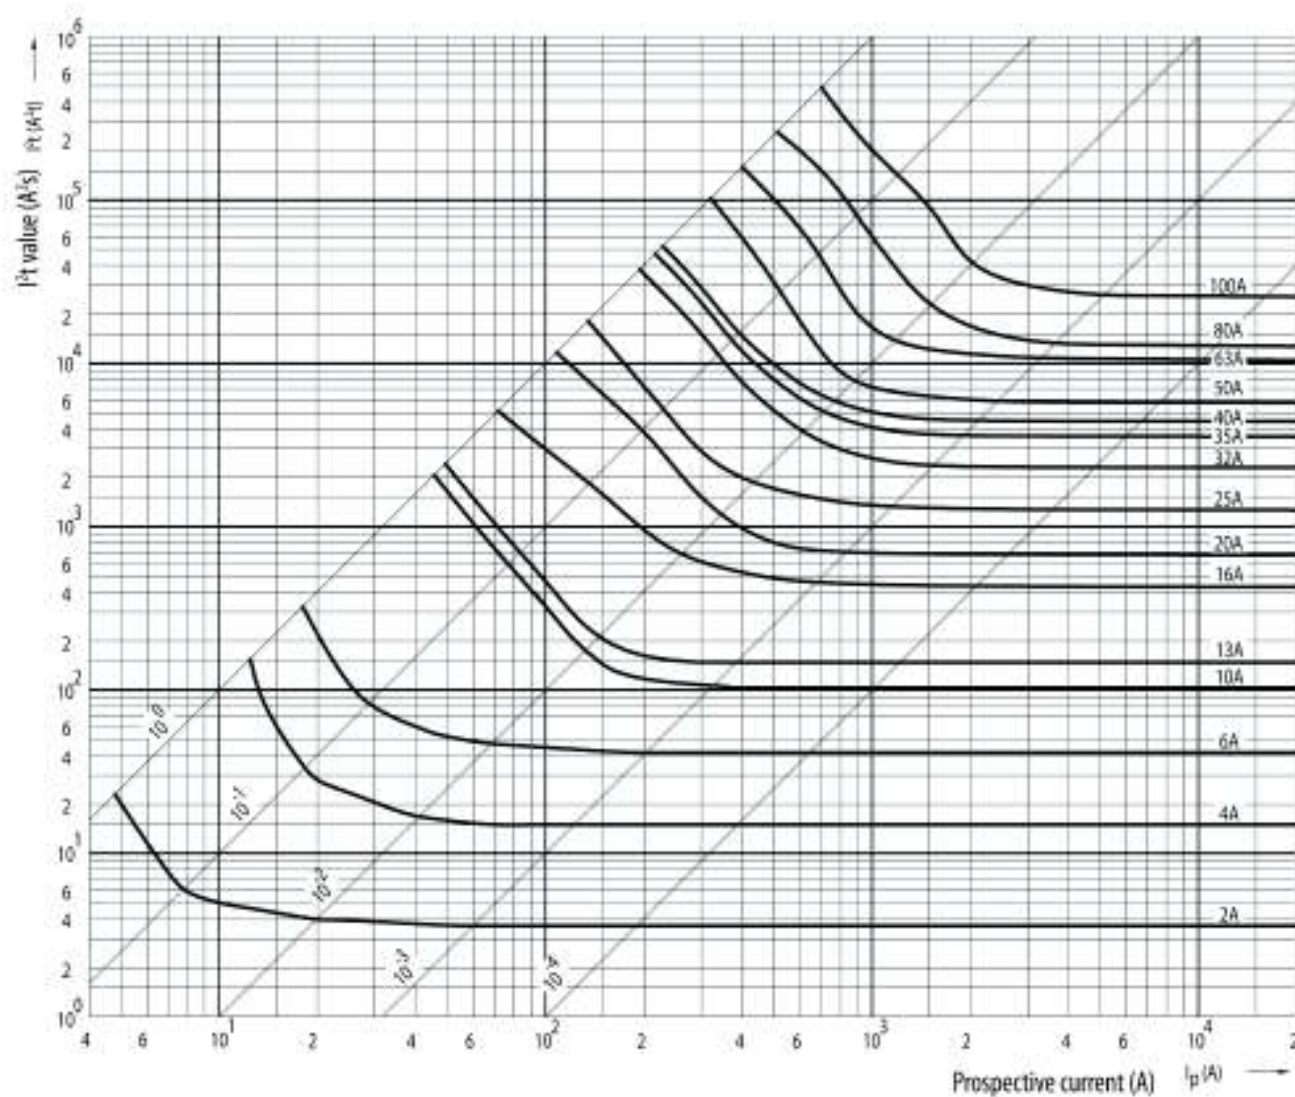

Dimension drawing

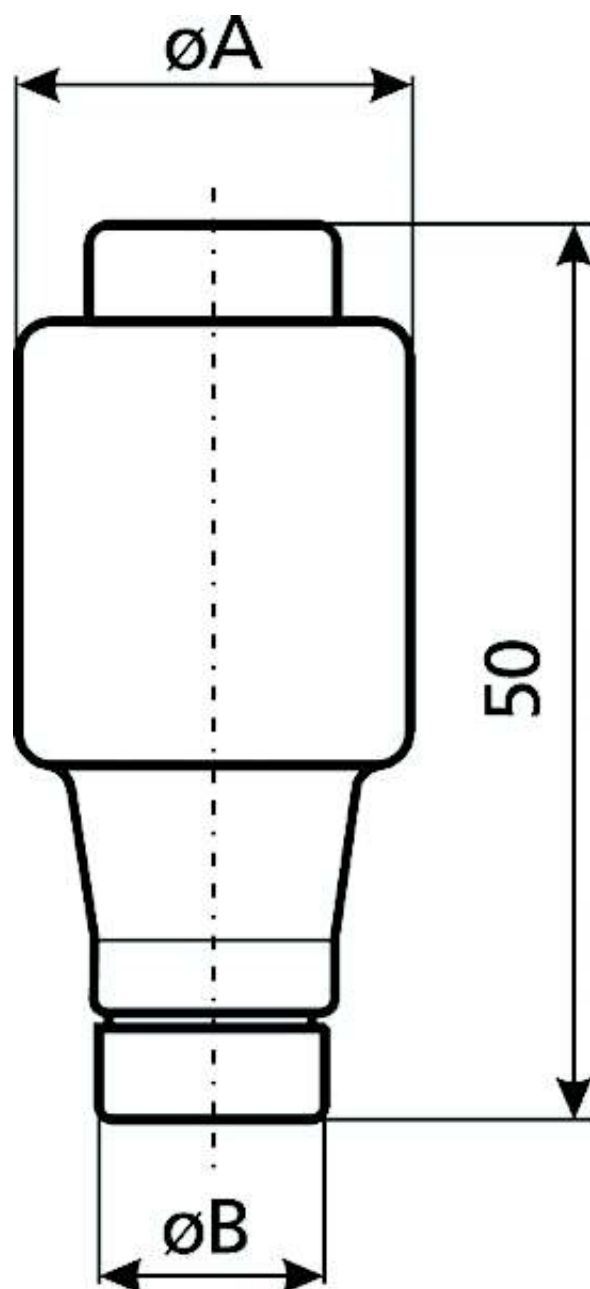

[A]	$\varnothing A$	$\varnothing B$
32	27	16
35	27	16
40	27	16
50	27	18
63	27	20