
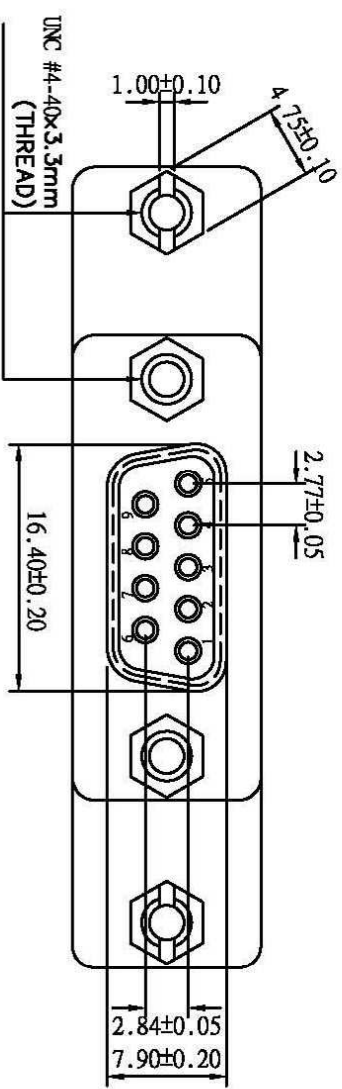


MA 001D (DB9F/25F ADAPTOR)
PIN OUT: 09Female 25Female

1	-----	8
2	-----	3
3	-----	2
4	-----	20
5	-----	7
6	-----	6
7	-----	4
8	-----	5
9	-----	22
G	-----	G

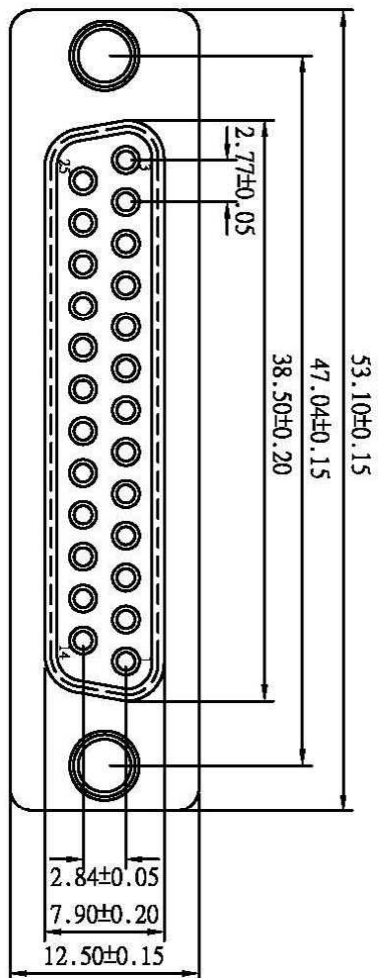

Label: orange color with white character
One side: SERIAL PORT ADAPTORS D9/D25
The other side: MINI ADAPTER
SPECIFICATION
INSULATOR: PBT Glass fibre reinforced UL 94 VO
CONTACT: Brass
CONTACT PLATING: Gold plated over nickel
SHELL: Tin plated shell
CURRENT RATING: 3 AMP
DIELECTRIC STRENGTH: 500V AC for one minute
INSULATOR RESISTANCE: 500MΩ min at 500V DC
TEMPERATURE: -25°C—+105°C

Customer	REVISION	DESCRIPTION	DATE	Edition							
				A0							
				SCALE							
				2:1							
				UNIT							
				mm							
				Page							
				1 / 1							
						DRAWN		<i>huang-y</i>		CHECKED	

UNLESS OTHERWISE SPECIFIED TOLERANCE: 0.01; 0.005; 0.0005; 10.15 10.15 10.15		PART NO.		DWG NO.		DATE	
		MA 001D S4 (0101)		TMO793-01		28/Sep-2006	