
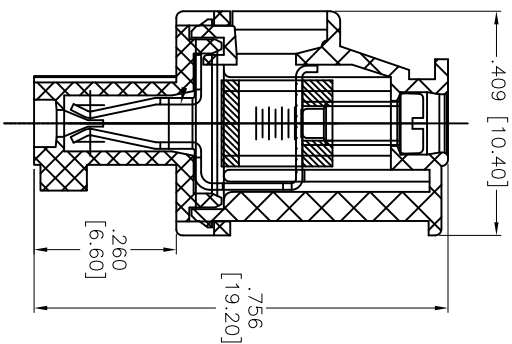
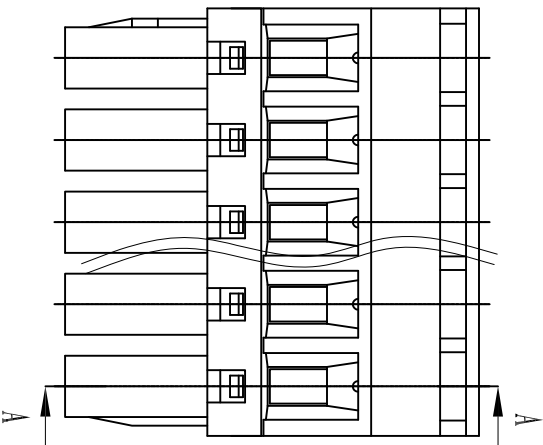


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/1/15	

APPROVED: _____

DATE: _____ TITLE: _____

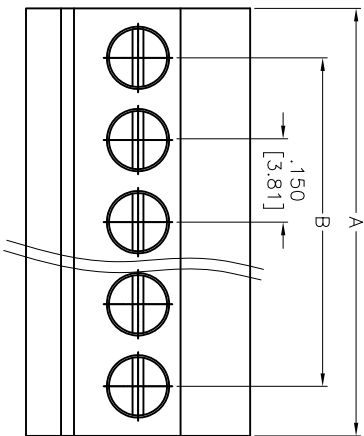

SECTION A-A

SPECIFICATIONS:

Material:

Insulator: PA66, rated UL 94V-0

Insulator color: Green

Screw: M2.0 Steel, Zinc plated

Clamp: Phosphor Bronze, Nickel plated

Cage: Brass, Nickel plated

Electrical:

Operation voltage: 300 V

Current rating: 8 A

Contact resistance: 20 mohms max

Insulation resistance: 500 Mohms min @ 500 VDC

Dielectric withstanding voltage: 2,000 VAC for 1 minute

Mechanical:

Wire Range: 16-28AWG, 1.0mm²

Torque: 0.2N-m, 1.7lb-in

Wire strip length: 6-7mm

Temperature Rating:

Operating temperature: -40°C to +105°C

Positions: 2 thru 24
A= .150 [3.81] x No. of Spaces + .181 [4.60]
B= .150 [3.81] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]

TOLERANCES: EXCEPT AS NOTED

.X ± .10 Holes ± .10

.XX ± .020 Holes ± .015

.XXX ± .015 Holes ± .010

APPROVALS DATE

DRAWN HR 4/1/15

CHECKED KW 4/1/15

APPROVED

TITLE

ADAM TECH
909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

EURO BLOCK, .150 [3.81] PITCH

SIZE PART NO.

X

REF: S00067C

SCALE: NTS

SHEET 1 OF 1

REV.

-

ROHS COMPLIANT