



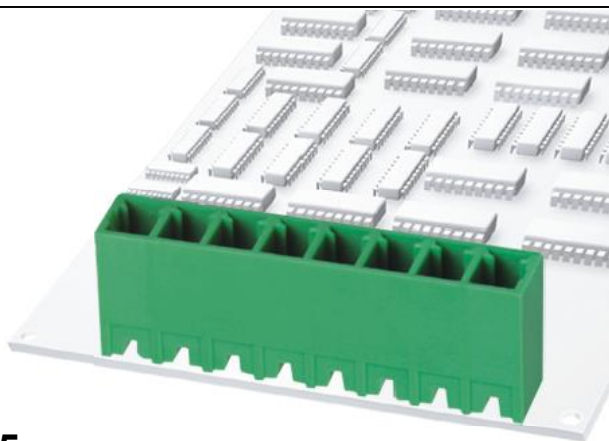

**15EDGVC-3.5**  
**15EDGVC-3.81**

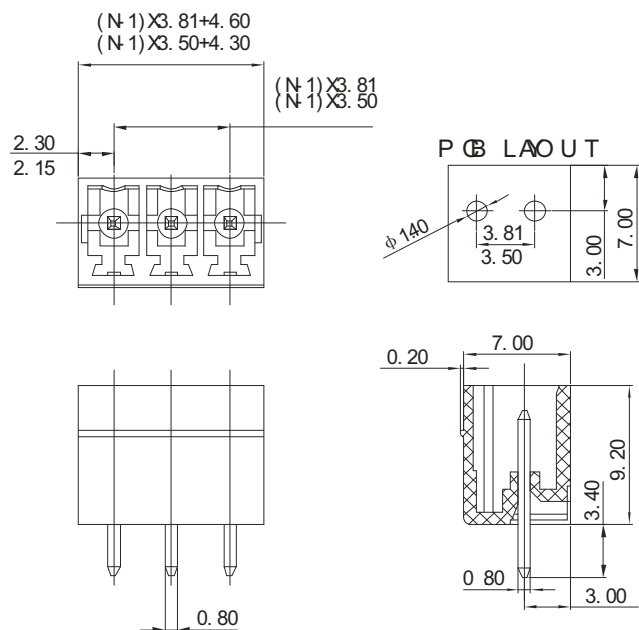

### APPROVAL

#### Electrical

Standard

Rated voltage

Rated current

Withstanding voltage

#### Mechanical

Ambient temperature

#### Dimensions

Pitch

Poles

#### Material

Housing

Pin header



UL

IEC

300V

250V

8A

7A

AC2000V/1Min

-40°C ~ +105 °C

3.5mm(.138" ) 3.81mm(.150" )



2P-24P

PA66,UL94V-0

Brass,Tin-plated

### HOW TO ORDER :

|               |   |             |   |   |   |   |                  |        |       |
|---------------|---|-------------|---|---|---|---|------------------|--------|-------|
|               | - |             | P | - | 1 | - | X                | X      | X     |
|               |   |             |   |   |   |   | Customer Request |        |       |
| Series number |   | No. of pole |   |   |   |   | Color            |        |       |
|               |   |             |   |   |   |   | 1                | 2      | 3     |
|               |   |             |   |   |   |   | Grey             | Blue   | Black |
|               |   |             |   |   |   |   | Green            | Orange | Red   |
|               |   |             |   |   |   |   | Trans Parent     | Yellow | White |



DEGSON ELECTRONICS CO., LTD.

NAME

15EDGVC-3.5, 15EDGVC-3.81