

Split ferrite

$\varnothing \leq 13 \text{ mm}$





FEATURES:

Square Shape

SPECIFICATION:

For cable size	$\varnothing \leq 13 \text{ mm}$
Colour	black
A	31.5 mm
B	30 mm
C	13 mm
D	33 mm
Impedance @ 25 MHz	105 Ω
Impedance @ 100 MHz	190 Ω

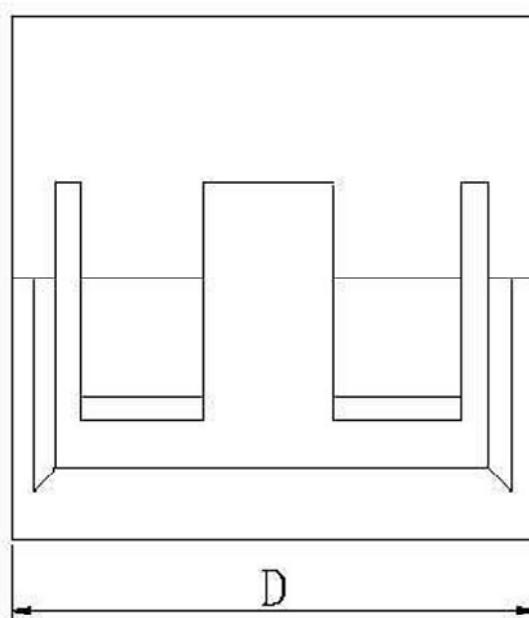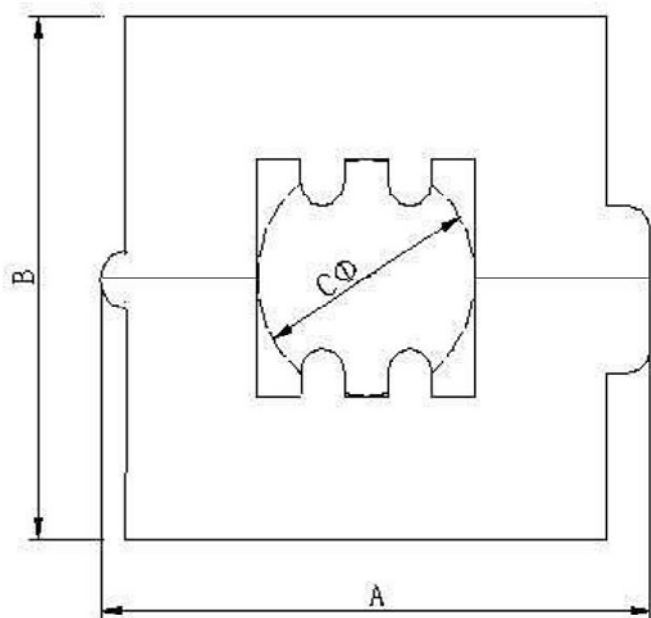


Split ferrite

$\varnothing \leq 13 \text{ mm}$

Frequency Graph

1. TEST INSTRUMENT: HP4286A
2. WINDING: $0.8 \Phi \times 220 \text{ mm}$ 2 U.E. W 1TS

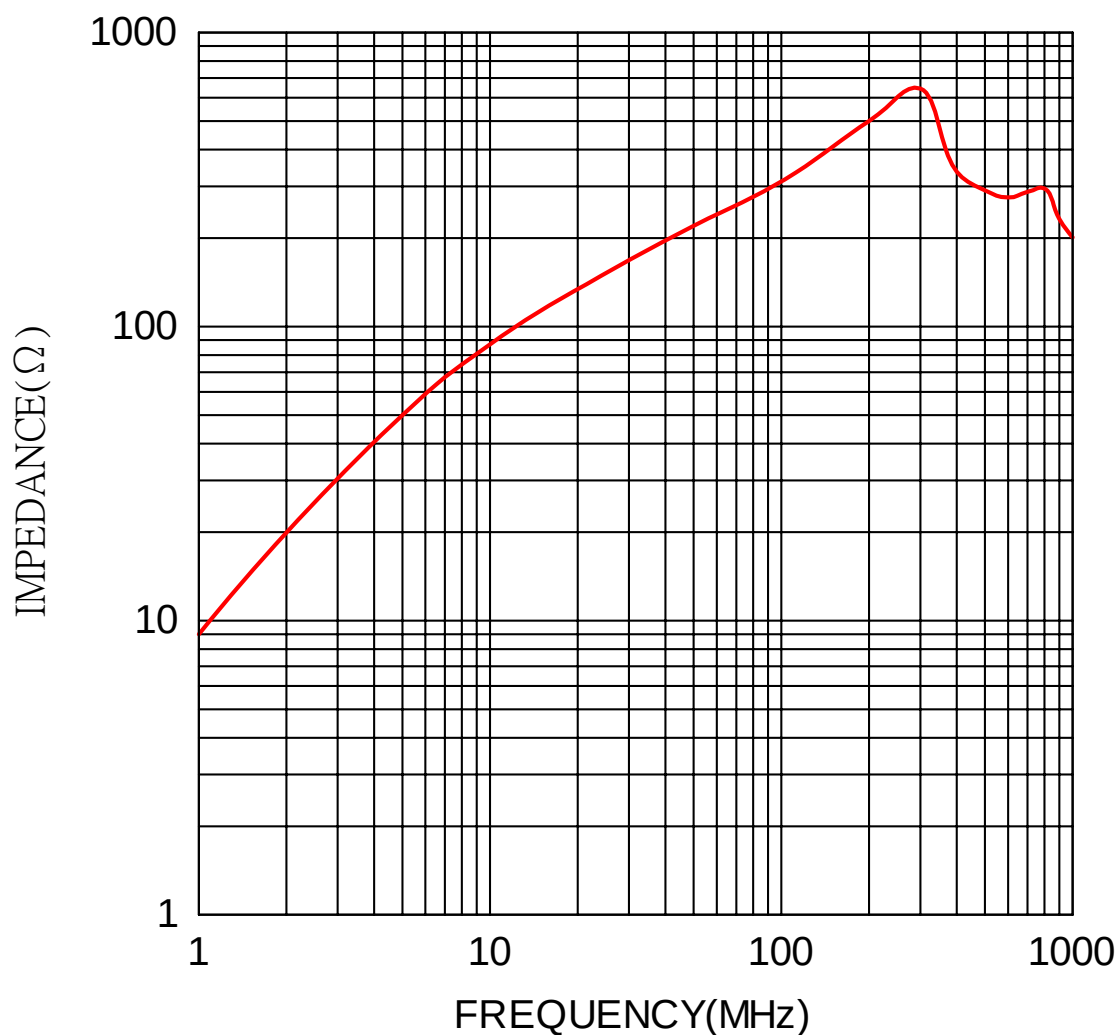

	1	5	10	25	50	100	200	300	400	500	600	700	800	900	1000
Z —	9	50	87	152	220	312	500	645	337	291	275	287	295	232	201

(DATA BETWEEN 500MHz AND 1000MHz ARE FOR REFERENCE ONLY)

Art. Nr.
RND 165-00003