

FEATURES


- ◆ Easy installation
- ◆ Internal dimensions are from 4mm to 15 mm radius.
- ◆ The smooth surface prevents damage to wire insulation.



APPLICATIONS

- ◆ Internal and external power cables
- ◆ Internal cables between pc boards and data connectors
- ◆ Computer peripherals, for example digital camera, DVD, fax machine, monitor, printer, and power supply cables

ORDERING CODE

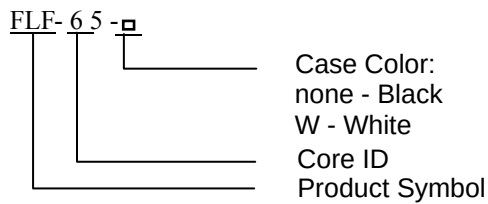

Other colors available if the order q'ty is over 10K pcs per item

SHAPES

Fig.1




Fig.2




Fig.3




Fig.4

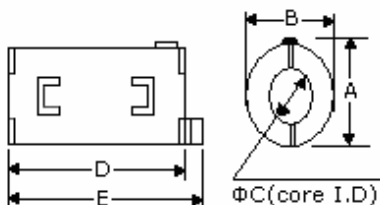


Fig.5





Fig.6



DIMENSIONS (UNIT:mm)

Part No.	Fig.	A (±1)	B (±1)	C (±0.3)	D (±1)	E (±1)	Impedance (Ω) Min		Use Cable Dia. Max
							25 MHz	100 MHz	
FLF-35	5	15.0	15.0	4.0	25.2	---	55	95	Φ4
FLF-50	5	16.5	16.5	5.2	29.5	---	70	120	Φ5
FLF-501B	2	15.0	14.0	5.2	23.0	---	70	120	Φ5
FLF-502	1	13.0	11.8	5.0	25.5	2.5	60	100	Φ5
FLF-60	6	15.5	14.0	6.0	18.5	---	60	80	Φ6
FLF-65B	2	20.5	20.0	6.5	33.0	---	120	200	Φ6.5
FLF-70	4	15.5	14.0	7.0	18.0	22.0	40	75	Φ7
FLF-702	1	17.0	15.0	7.0	30.0	2.5	70	130	Φ7
FLF-75	5	21.0	21.0	7.5	39.0	---	90	150	Φ7.5
FLF-801	3	19.5	23.0	8.1	17.0	23.0	42	85	Φ8
FLF-802	3	19.5	23.0	8.1	20.0	26.0	50	110	Φ8
FLF-901	4	20.5	19.5	9.0	31.5	35.5	80	130	Φ9
FLF-902	1	19.5	18.0	9.0	35.0	5.5	80	130	Φ9
FCT-0933	5	22.5	22.5	9.5	43.0	---	105	190	Φ9.5

ROUND CABLE EMI CORES / FLF TYPE

FLF-100B	2	25.5	23.5	10.0	33.0	---	80	130	Φ10
FLF-101	3	24.5	28.5	10.2	13.5	20.0	35	75	Φ10
FLF-110	4	20.5	21.0	11.0	32.0	36.0	60	110	Φ11
FLF-1101	1	21.0	20.0	11.0	36.0	---	80	170	Φ11
FLF-120	3	28.0	32.0	11.5	18.0	24.0	50	100	Φ11.5
FLF-130B	2	32.5	30.0	13.0	33.0	---	105	170	Φ13
FLF-1301	1	23.5	22.5	13.0	36.0	8.5	70	120	Φ13
FLF-1302	4	31.5	30.5	13.0	34.0	39.5	80	130	Φ13
FLF-150	3	29.0	33.0	15.0	15.5	21.5	30	70	Φ15

ROUND CABLE EMI CORES / LF TYPE

