

Voltage Monitoring Series SM 500

- Protects against Phase Loss, Phase Reversal & Phase Asymmetry
- Can be configured for 3 Phase 4 Wire or 1 Phase system
- Selectable Over Voltage / Under Voltage Trip level
- Selectable Time Delay
- LED Indications for Power and Fault conditions
- Voltage Sensing principle
- 1 C/O or 2 C/O Configuration



Cat. No.		MD71BH	MD71BF	MD71B9
Parameters				
Supply Voltage (φ)		240 VAC (1 Phase & 3 Phase, 4 Wire)		
Frequency		50/60 Hz		
Power Consumption (Max.)		4 VA		
Trip Settings	Phase Loss	Yes	Yes	Yes
	Phase Sequence	N.A	N.A	N.A
	Phase Asymmetry	N.A	N.A	N.A
	Under Voltage	55% to 95% (of φ)		
	Over Voltage	105% to 125% (of φ)		
Time Delay	ON Delay	0.5 to 15 s (Selectable)	5 s	0.5 s to 15 min (Selectable)
	Trip Time (OFF Delay)	5 s	0.5 to 15 s (Selectable)	5 s
Output	Relay Output	1 C/O		
	Contact Rating	5A @ 250 VAC / 28 VDC (Resistive)		
	Electrical Life	1X10 ⁵		
	Mechanical Life	3X10 ⁶		
Utilization Category	AC - 15	Rated Voltage (Ue): 120/240 V, Rated Current (Ie): 3.0/1.5 A		
	DC - 13	Rated Voltage (Ue): 24/125/250 V, Rated Current (Ie): 2.0/0.22/0.1 A		
LED Indication		Separate indications for Power ON, UV and OV		
Operating Temperature		-15° C To + 55° C		
Storage Temperature		-25° C To + 70° C		
Humidity (Non Condensing)		95% (Rh)		
Enclosure		Flame Retardant UL 94-V0		
Dimension (W x H x D) (in mm)		36 X 90 X 60		
Weight (unpacked) Approx.		120 g		
Mounting		Base / DIN rail		
Degree of Protection		IP 20 for Terminals, IP 40 for Enclosure		
Certification		 		
EMI / EMC				
Harmonic Current Emissions		IEC 61000-3-2		
ESD		IEC 61000-4-2		
Radiated Susceptibility		IEC 61000-4-3		
Electrical Fast Transients		IEC 61000-4-4		
Surges		IEC 61000-4-5		
Conducted Susceptibility		IEC 61000-4-6		
Voltage Dips & Interruptions (AC)		IEC 61000-4-11		
Conducted Emission		CISPR 14-1		
Radiated Emission		CISPR 14-1		
Environmental				
Cold Heat		IEC 60068-2-1		
Dry Heat		IEC 60068-2-2		
Vibration		IEC 60068-2-6		
Repetitive Shock		IEC 60068-2-27		
Non-Repetitive Shock		IEC 60068-2-27		


Note: 1) Voltage setting is with respect to Neutral. Voltage Setting Accuracy: ± 5 % of Full Scale; Time Setting Accuracy: ± 10 % of Full Scale

ORDERING INFORMATION


Cat. No.	Description
MD71BH	240 VAC, UV / OV with Selectable ON Delay (0.5 to 15 sec), 1 C/O
MD71BF	240 VAC, UV / OV with Selectable OFF Delay (0.5 to 15 sec), 1 C/O
MD71B9	240 VAC, UV / OV with Selectable ON Delay (0.5 s to 15 min), 1 C/O



CONNECTION DIAGRAM

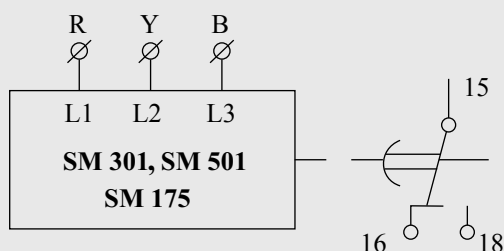


MA51BC, MA51BK, MN21D5, MK21D5, MC21D5
MA21DN, MD21DF, MG21DH, MG21DF, MGD1DR

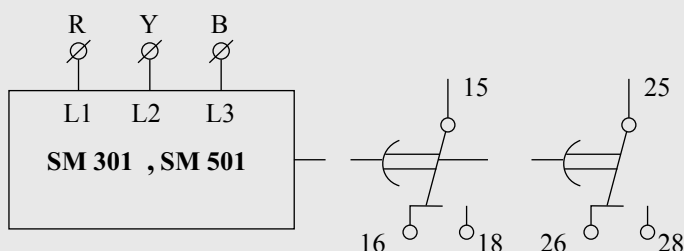


MG53BH, MG53BF, MG63BH, MG63BF
MG53BI, MG53BO, MB53BM, MC21B5

SINGLE PHASE

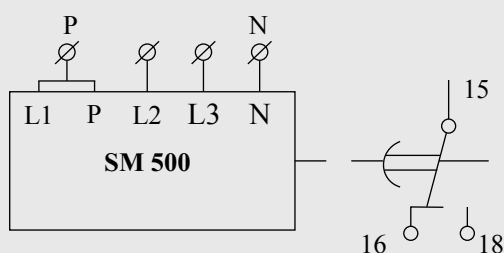


MD71BH, MD71BF, MD71B9

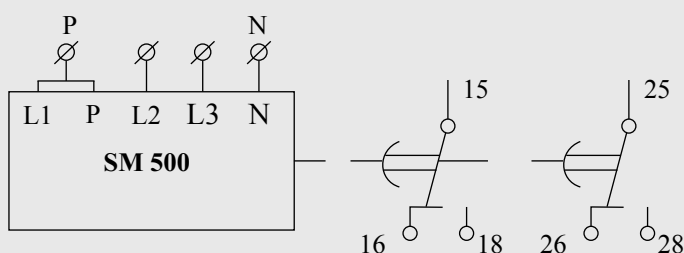


MG73BH, MG73BF, MG73B9

THREE PHASE

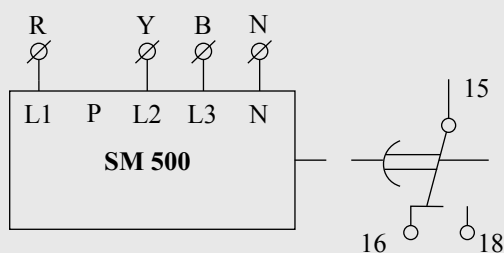


MD71BH, MD71BF, MD71B9

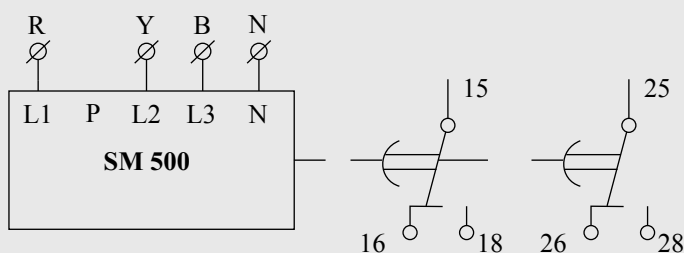


MG73BH, MG73BF, MG73B9, MAC04D0100 (P is not applicable in neutral loss)

MOUNTING DIMENSION (mm)

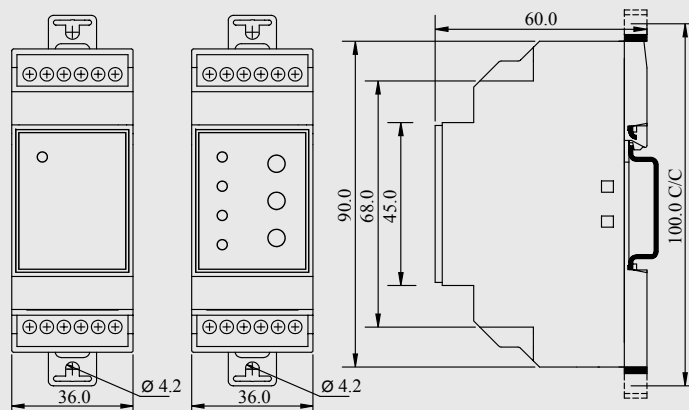

SM 301

SM 500, SM 501

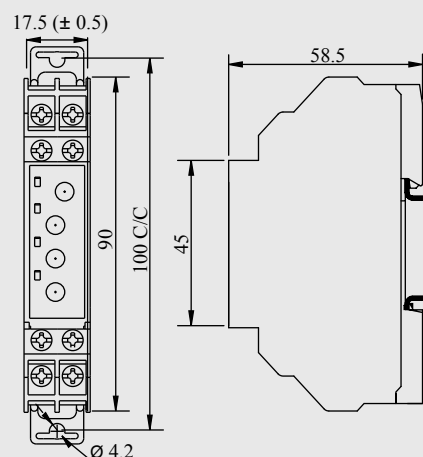

SM 175

TERMINAL TORQUE & CAPACITY

	Torque - 0.54 N.m (5 Lb.in) Terminal screw - M2.6
	Solid Wire - 1 X 0.2...3.3 mm ²
AWG	1 X 24 to 12

SM 301, SM 500, SM 501

	Torque - 1.1 N.m (10 Lb.in) Terminal screw - M3.5
	Solid Wire - 2 X 0.2...2.5 mm ²
AWG	1 X 24 to 10

SM 175