

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

Technical characteristics:

Specifications

DIN EN 60 664-1




DIN EN 61 984

Inserts

- 01.Number of contacts :10+PE
- 02.Rated Current :16A
- 03.Rated Voltage :250V
- 04.Pollution degree :3
- 05.Rated impulse voltage :4kv
06. Insulation resistance : $\geq 10^{10} \Omega$
07. Material:Polycarbonate
- 08.Rated voltage acc. to UL/CSA:600V
- 09.Limiting temperatures : $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 10.Flammability acc. to UL94:V0
- 11.Mechanical working life
(mating cycles) : ≥ 500

Contacts

01. Material:Copper alloy
02. Surface:hard-silver plated
- 03.Contact resistance : $\leq 1\text{m}\Omega$
- 04.Terminal :Screw terminal
- 05.Wire gauge :1.0-2.5mm² (AWG 18-14)
- 06.Tightening torque :0.5Nm
- 07.Stripping length :7.5mm
- 08.Rohs Compliance

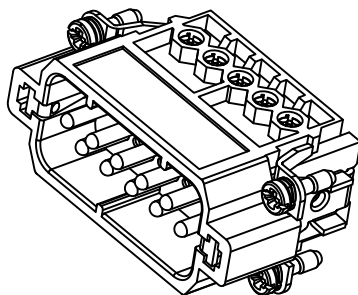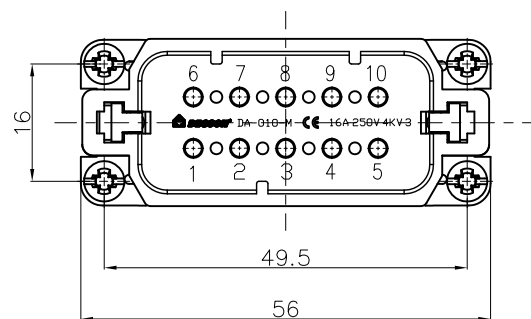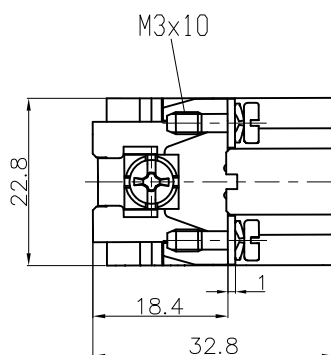

DETACHED LISTS	PART NO.: /		 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:		NAME:		
	CHKD:		DA-010-M		
	DRFT: yang 2016.07.25		TITLE: CUSTOMER DRAWING		REV DO-1
	 THIRD ANGLE PROJECTION		DRAWING NO.: DA-010-M-E01		SHEET 1/1
			DO NOT SCALE DRAWING	SCALE	