

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

Technical characteristics:

Specifications

DIN EN 60 664-1

DIN EN 61 984

Inserts

01.Number of contacts :10+PE

02.Rated Current :16A

03.Rated Voltage :250V

04.Pollution degree :3

05.Rated impulse voltage :4kv

06. Insulation resistance : $\geq 10^{10} \Omega$

07. Material:Polycarbonate

08.Rated voltage acc.to UL/CSA:600V

09.Limiting temperatures : $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

10.Flammability acc.to UL94:V0

11.Mechanical working life

(mating cycles) : ≥ 500

Contacts

01. Material:Copper alloy

02. Surface:hard-silver plated

03.Contact resistance : $\leq 1\text{m}\Omega$


04.Terminal :Screw terminal


05.Wire gauge :1.0-2.5mm² (AWG 18-14)

06.Tightening torque :0.5Nm

07.Stripping length :7.5mm

08.Rohs Compliance

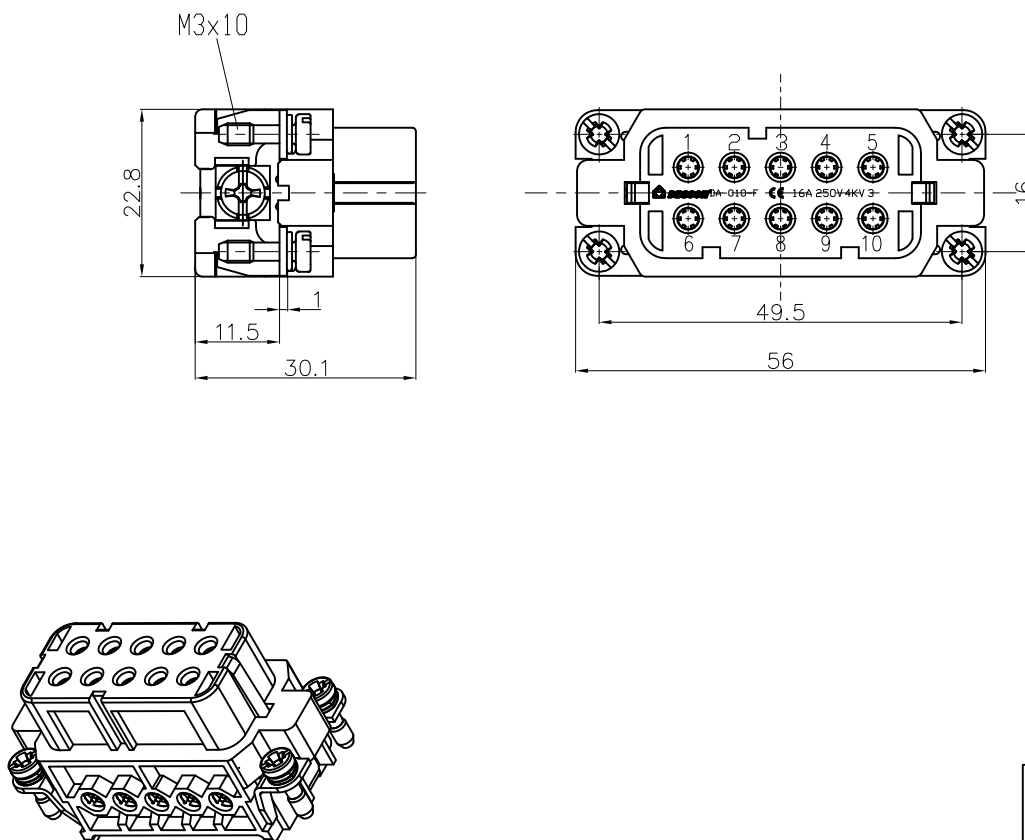

DETACHED LISTS	PART NO.:	/				 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	NAME:					DA-010-F	
	CHKD:							
	DRFT: yang	2016.07.25	TITLE: CUSTOMER DRAWING			REV	DO-1	
	 THIRD ANGLE PROJECTION		DRAWING NO.: DA-010-F-E01		SHEET	1/1		
				DO NOT SCALE DRAWING		SCALE		