

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

Technical characteristics:

Specifications

DIN EN 60 664-1

DIN EN 61 984

Inserts

01.Number of contacts :16+PE

02. Rated Current :16A

03. Rated Voltage :250V

04. Pollution degree :3

05. Rated impulse voltage :4kv

06. Insulation resistance : $\geq 10^{10} \Omega$

07. Material:Polycarbonate

08. Rated voltage acc. to UL/CSA:600V

09. Limiting temperatures : $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$

10. Flammability acc. to UL94:V0

11. Mechanical working life

(mating cycles) : ≥ 500

Contacts

01. Material:Copper alloy

02. Surface:hard-silver plated

03. Contact resistance : $\leq 1\text{m}\Omega$




04. Terminal :Screw terminal


05. Wire gauge :1.0-2.5mm² (AWG 18-14)

06. Tightening torque :0.5Nm

07. Stripping length :7.5mm

08. Rohs Compliance

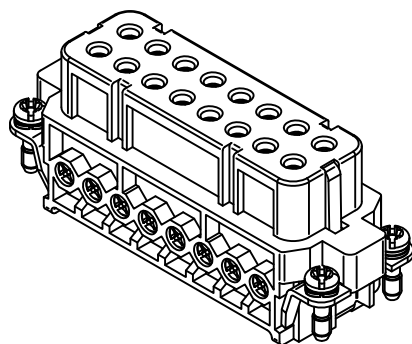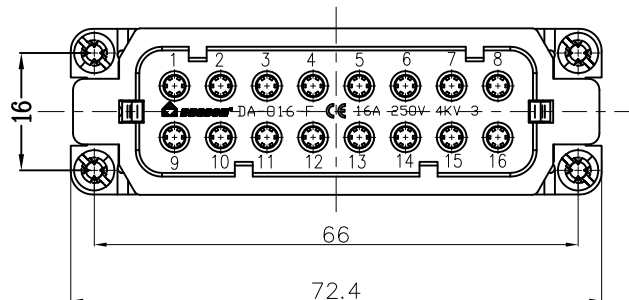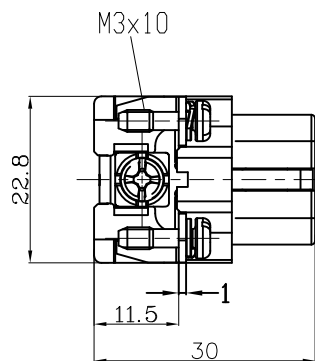

DETACHED LISTS	PART NO.:	/			 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
	APPD:				NAME:	
	CHKD:				DA-016-F	
	DRFT: yang	2016.07.25	TITLE: CUSTOMER DRAWING		REV	DO-1
		DRAWING NO.: DA-016-F-E01		SHEET	1/1	
THIRD ANGLE PROJECTION		MM (INCH)		DO NOT SCALE DRAWING	SCALE	