


KSPpz - 5

INTERFERENCE SUPPRESSION CAPACITORS OF X2 CLASS

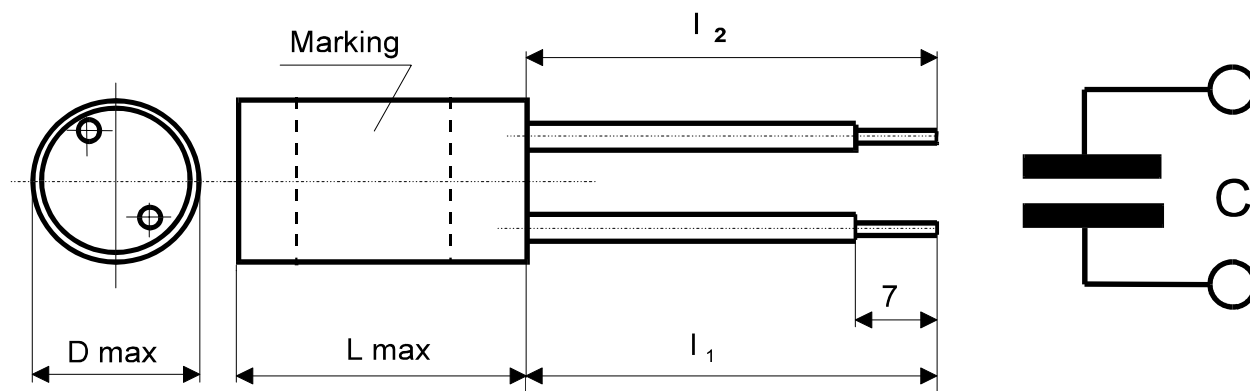

TECHNICAL DATA

Climatic category	40/085/21/C
Rated capacitance	See table
Capacitance tolerance	$\pm 20\%$
Rated voltage (U_R)	250V AC
Insulation resistance (R_{ins})	$\geq 6000 \text{ M}\Omega$
Specifications:	WT-80/1-KSPpz

KSPpz-5 capacitors have VDE certificate EN 60384-14.

Version	Capacitance	Resonant frequency	Dimensions				Weight
			D _{max}	L _{max}	l ₁	l ₂	
	μF	MHz	mm				
01	0.025	≥2.8	13.0	35.5	55.0	55.0	7
02	0.070	≥2.0	14.5	41.0	45.0	80.0	17
03	0.100	≥1.4	15.5	35.5	65.0	65.0	17
04	0.150	≥1.0	16.5	41.0	80.0	80.0	19
06	0.070	≥2.0	14.5	41.0	140.0	160.0	17
07	0.050	≥2.0	13.0	35.5	55.0	55.0	15
08	0.1	≥1.4	15.5	35.5	140	140	

MIFLEX S.A.
 ZAKŁADY PODZESPOŁÓW RADIOWYCH
 99-300 KUTNO, UL. GRUNWALDZKA 3, POLAND
 Tel.: 0048 24 355 11 00÷02
 Fax: 0048 24 355 11 88
 E-mail: miflex@miflex.com.pl

Revision date: 05.05.2008.