
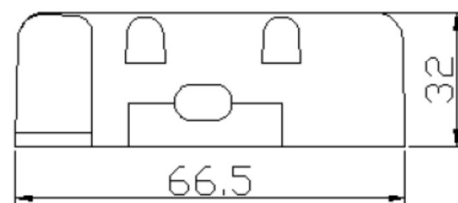


LED Power Supply Constant Voltage	
Model	LNH10012CV
Voltage	12V
Current	8.33A
Power	100W

Input	Rated input voltage	230 VAC
	Range of input voltage	220-240VAC
	Frequency	50Hz
	Power Factor	>0.9@Full Load, 240VAC
	Current	0.5 A MAX. @Full Load
	Start-Up time	<0.5S for ERP @Full Load
	Inrush Current	60A MAX. @Full Load, 240 VAC
	Unload Power Consumption	≤2W
Output	Unload voltage	12.6VDC MAX
	Load Voltage rang	NC
	Constant Voltage	12V
	Voltage Accuracy	±5% @220-240VAC
	Voltage Regulation	≤3%@Full Load
	Hold-up Time	<1s max,Io=0mA
	Efficiency in full load	≥85%@Full Load ,240VAC
	Ripple	NA
	Power Max	100W
Dimming	Dimmable or not	NA
	Dimming mode	NA
	Dimming current range	NA
Protection	Over load Protection	105-150%
		Protection type: Auto Restore
		>16VDC
	Over Voltage Protection	Protection type: Auto Restore
	Short circuit Protection	Protection type: Auto Restore
HI-pot	Over Temperature protection	Protection type: Auto Restore
	Input-Output(V.AC)	3000V/5mA/1min
	Input-FG(V.AC)	NA
	Output-FG(V.AC)	NA
Isolation	Leakage Current	<0.5mA(240VAC)
	Input-Output(V.AC)	≥10MΩ@500VDC
	Input-FG(V.AC)	NA
	Output-FG(V.AC)	NA
Environment/Life	Operating Temperature	-10°C...+40°C
	t _c	85°C
	Storage Temperature	-20°C...+60°C
	Humidity	20%-90%RH
	Life time	>30,000h @50°C
Feature	HSF requirement	RoHS
	Dimension	171*57*32(LXWXH)mm
	Approval	CE
	Safety standards	EN 61347-1; EN61347-2-13 EN60598-1; EN60598-2-6
	EMI	EN55015; EN61000-3-2 Class C EN61000-3-3
		EN61547; EN 61000-4-2 - 8KV; 4KV
Safety @ EMC	EMS	Performance Criteria B
		EN 61000-4-5 —1000V; Performance Criteria C

LED Power Supply Constant Voltage	
Model	LNH10012CV
Voltage	12V
Current	8.33A
Power	100W

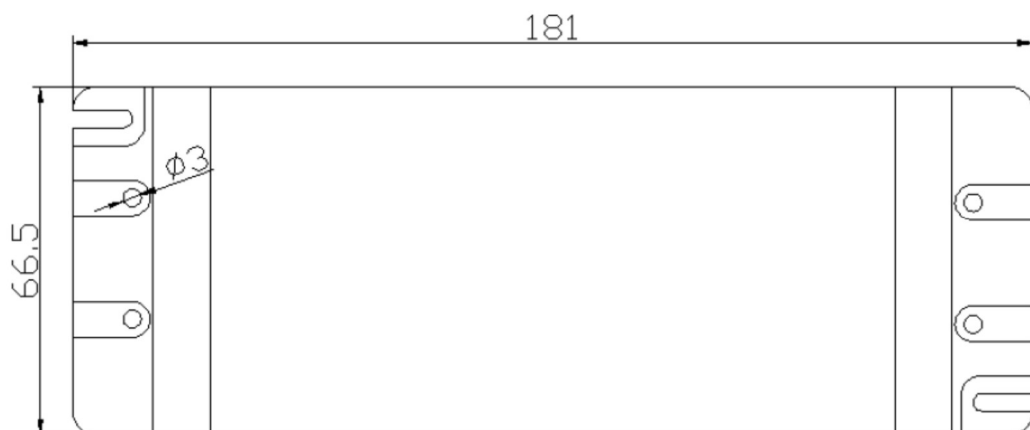

ESPE

LED POWER SUPPLY

LNH10012CV

INPUT..... 230VAC
50Hz 0.6A

OUTPUT..... 12V $\equiv$ 8.33A

$\lambda \geq 0.9$ $t_c: 85^\circ\text{C}$ $t_a: 40^\circ\text{C}$ • t_c

Constant Voltage

SELV

MADE IN CHINA

110 M M F

IP20

CE



IP20

