

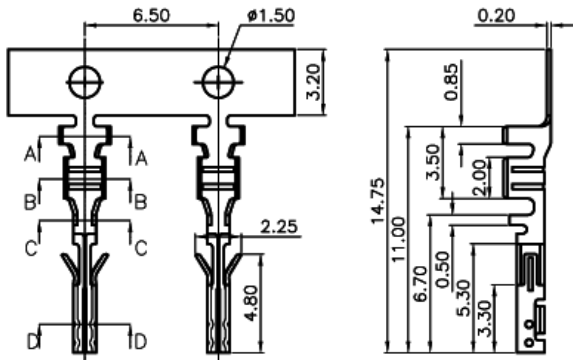
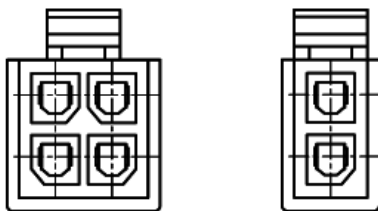
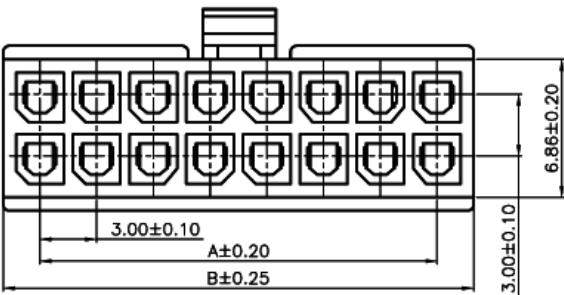


Specifications:
Current Rating:5.0A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:10m ohm. Max.
Insulation Resistance:1000M ohm. Min.
Withstanding Voltage:1.500V AC/Minute
Operating Temperature Range:-25°C~+105°C
Material and Finish
Insulator:Nylon66 UL94V-0
Insulator Color: Black
Contact:Phosphor Bronze
Plating:Tin Plated



2,4Pin

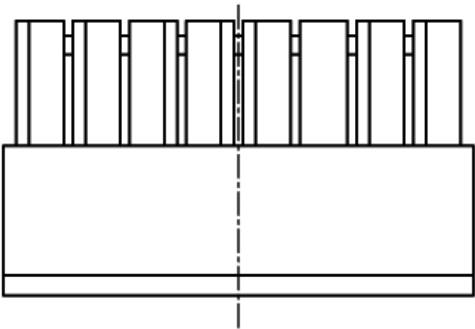

POS. NO.	Dimension	
	A	B
02	—	3.85
04	3.00	6.85
06	6.00	9.85
08	9.00	12.85
10	12.00	15.85
12	15.00	18.85
14	18.00	21.85
16	21.00	24.85
18	24.00	27.85
20	27.00	30.85
22	30.00	33.85
24	33.00	36.85



TOLERANCE (mm)		APPROVALS	DATE	TITLE 3.0 Power Connector Receptacle Housing		AMPHENOL Amphenol European Design Center	
X.	±0.3	DRAWN Stephane	2009/DEC/18			Scale N.A.	Sheet 1 of 2
X.X	±0.2	CHECKED Rob	2009/DEC/18				
X.XX	±0.15	APPROVED Rob	2009/DEC/18				
UNLESS OTHERWISE SPECIFIED			UNIT : mm	SIZE : A4	DRAWING N° MF30-HFD1-xx		REV. A

