
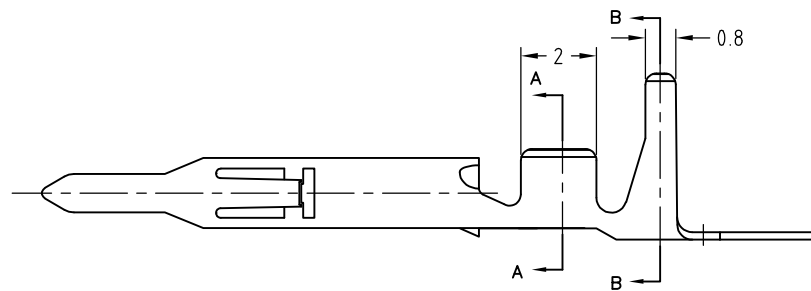


LOC	DIST	REVISIONS 変更				DATE	DWN	APVD
J	—	P	LTR	DESCRIPTION				
			K1	REVISED PER ECO-11-005030		11MAR11	RK	HMR


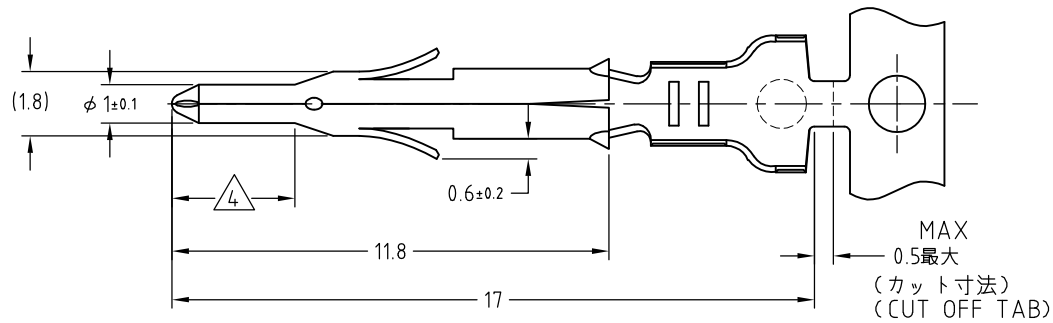


注記

1. 使用ハウジングはキャップ及びプラグ
- △ 2本圧着の被覆外径は3.4mm最大
3. 取扱説明書：IS-105J
- △ 全面ニッケルメッキの上に0.76μm最小の金メッキを施す。

NOTES

1. APPLICABLE HOUSING : CAP AND PLUG.
- △ APPLICABLE INSULATION DIA METER FOR TWO-WIRE CRIMP IS 3.4mm MAX.
3. INSTRUCTION SHEET : IS-105J
- △ SELECTIVE GOLD PLATED AREA 0.76μm MIN THK OVER Ni PLATED.



170361,170362 170365,170366	170364-4	PRE TIN PHOS BRO 0.2t 錫めっき済磷青銅 0.2t	170360-4
	170364-3	BRASS 0.2t 黄銅 0.2t	170360-3
	170364-1	PRE TIN BRASS 0.2t 錫めっき済黄銅 0.2t	170360-1
かん合相手型番 MATING CON'T	ばら状態型番 LP.NO	材料 MATERIAL	型番 P/N

WIRE RANGE
絶合電線断面積AWG#22~#18
0.30~0.59mm²INSULATION DIA
被覆外径

△ 1.5~2.4mm

THIS DRAWING IS UNPUBLISHED.

By -

COPYRIGHT

©

DIMENSIONS:
単位： 耗
mm

DWN J.SATO 18JAN2008

MATERIAL
材料

SEE TABLE

FINISH
仕上TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

CHK S.MANABE 18JAN2008

APVD S.MANABE 18JAN2008

PRODUCT SPEC
製品規格
108-5138APPLICATION SPEC
取付適用規格
114-5050

WEIGHT

NAME
名称MINI UNIVERSAL MATE-N-LOK
PIN CONTACT

SIZE

CAGE CODE

DRAWING NO
番号

RESTRICTED TO

A4

00779

C- 170360

—

CUSTOMER DRAWING

SCALE
尺度

4:1

SHEET

1 OF 1

REV K1