


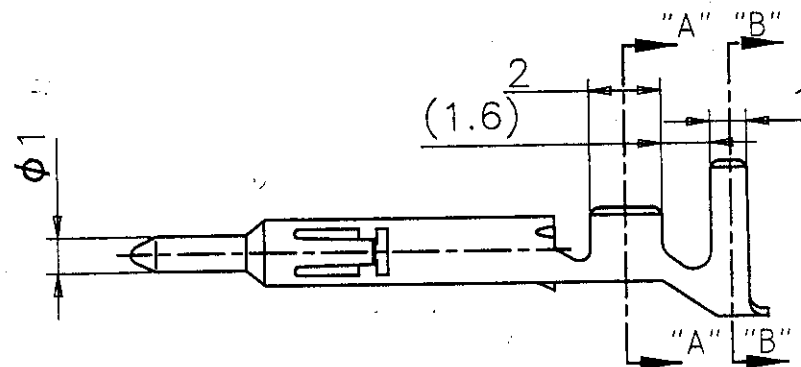


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			B1	REVISED PER ECO-11-005030	22MAR11	RK	HMR

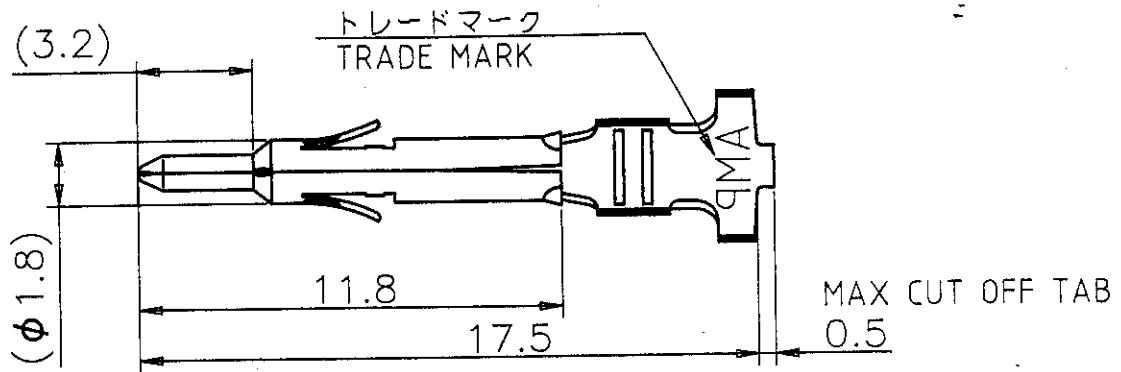

SECT A-A



SECT B-B

注記)

1. 使用ハウジングはキャップ及びプラグ

△ 製品規格 108-5138, 108-5151

△ 取付適用規格 114-5050

4. 取扱説明書 411-5105

NOTES)

1. APPLICABLE HOUSING, CAP AND PLUG

△ PRODUCT SPECIFICATION 108-5138, 108-5151

△ APPLICATION SPECIFICATION 114-5050

4. INSTRUCTION SHEET 411-5105

171638-1

型番 (PART NO.)

DIMENSIONS:
単位
MMTOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

± 0.3

ANGLES
± 1°

DWN

CHK

APVD

PRODUCT SPEC
製品規格

表参照

SEE TABLE

△ 2

APPLICATION SPEC
取付適用規格

表参照

SEE TABLE

△ 3

WIRE RANGE

適合電線径範囲

0.5-1.3mm² AWG #20-16

MATERIAL

材料

黄銅 (BRASS): 0.25t

INSULATION DIA 2.0-3.2mm DIA

被覆外径

FINISH

仕上

PRE-TIN

TE

TE Connectivity

NAME

名称

PIN (LOOSE PIECE)

MINI UNIVERSAL MATE-N-LOK

SIZE

A4

CAGE CODE

00779

DRAWING NO

C=171638

RESTRICTED TO

CUSTOMER DRAWING

SCALE

5:1

SHEET

1

OF

1

REV

B1

参考図面