
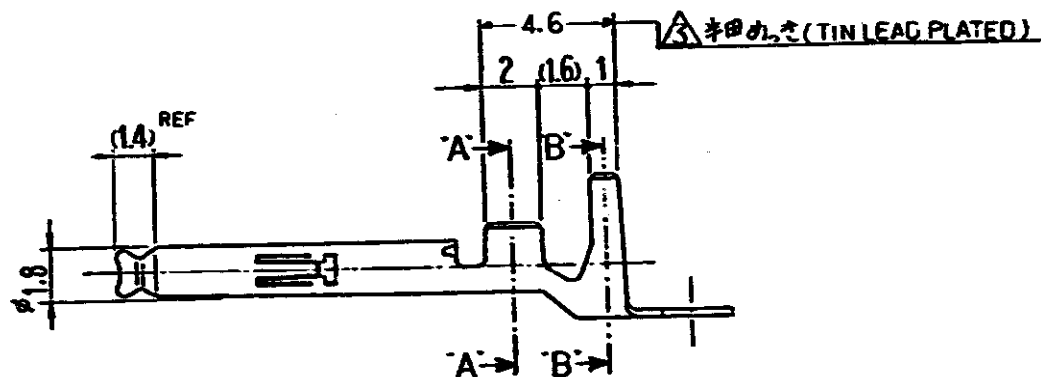


C-171637

△ GOLD PLATED 0.76 μ m^{MIN} ON CONTACT AREA, TIN LEAD PLATED ON BARREL AREA OVER NICKEL PLATED.

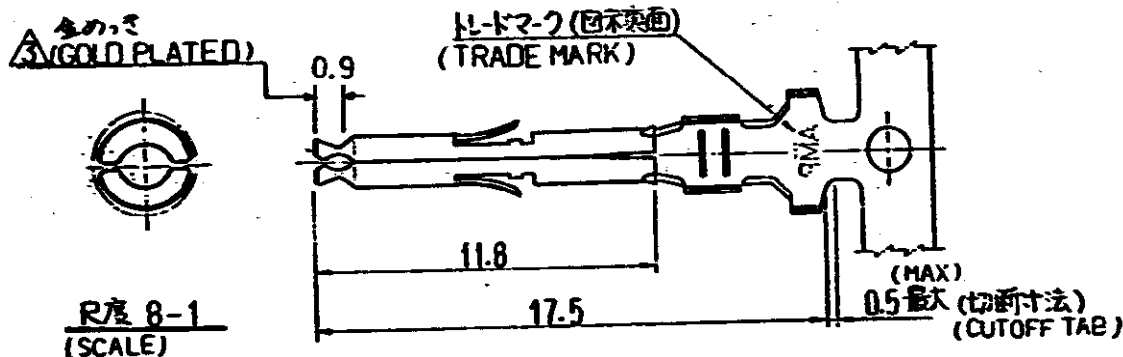

注: 1. 適用規格

製品規格 108-5151, 108-5138.


取付適用規格 114-5050

取扱説明書 IS-105J


△ 2芯着通電線

AWG#20 (VSF被覆外形φ2.4)×2

△ ニュールめき下地に、金めき(0.76 μ m最小厚部)
及びバレル部半田めき



断面 A-A
(SECT)



断面 B-B
(SECT)

NOTES: 1. PRODUCT SPECIFICATION 108-5151, 108-5153
APPLICATION SPECIFICATION 114-5050
INSTRUCTION SHEET IS-105J

△ APPLICABLE WIRE FOR TWO-
WIRE CRIMP
AWG#20 (VSF INSULATION
DIAMETERφ2.4)×2

△ OBSOLETE

171639-1	△ 金めき (板厚0.25) GOLD PLATED BRASS (0.25T)	△ 171637-3
	金めき 半田めき (板厚0.25) PRE TINNED BRASS (0.25T)	171637-1
バラ端子 (LOOSE PIECE)	仕上 材料	型番 (P/N)

REF. MATERIAL 表参照 (SEE TABLE)		TE Connectivity	
FINS FINISH			
FINS FINISH (WIRE RANGE) △ 05-13 mm ² AWG20-16		22 CLASS	
INSULATION DIA. 20-32.24×2 mm		CCT TYPE	
公差 ±0.3 (TOLERANCE) EXCEPT (AS NOTED) ±1.0	21 SCALE	LOC	REV.
4-1	J A	C-171637	C2
REV. (NAME): SOCKET CONTACT (MINI UNIVERSAL M-N-L) ソケットコンタクト (ミニユニバーサルメイトロク雄雄同形型コネクタ)			

C2	REVISED PER ECR-15-006702	NK	PQ	29 JUL 2015
LTR	変更 REVISION RECORD	DR	CHK	DATE
DR	J. Ouchi	DE	N. Ouchi	
CHK	7/2/15	APP	A. Tani	7/2/15