

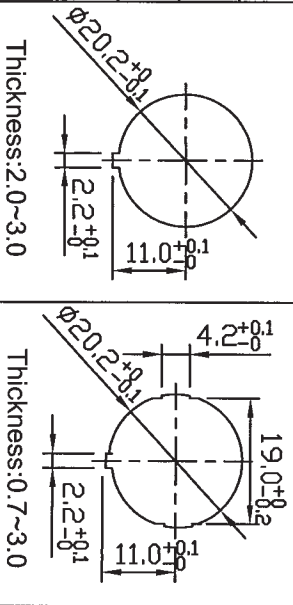




Rating	20A 14VDC	Mounting Hole	
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-25°C ~ 85°C		
Switch Function	3P SPST ON-OFF (LED dependent)	Circuit Diagram	

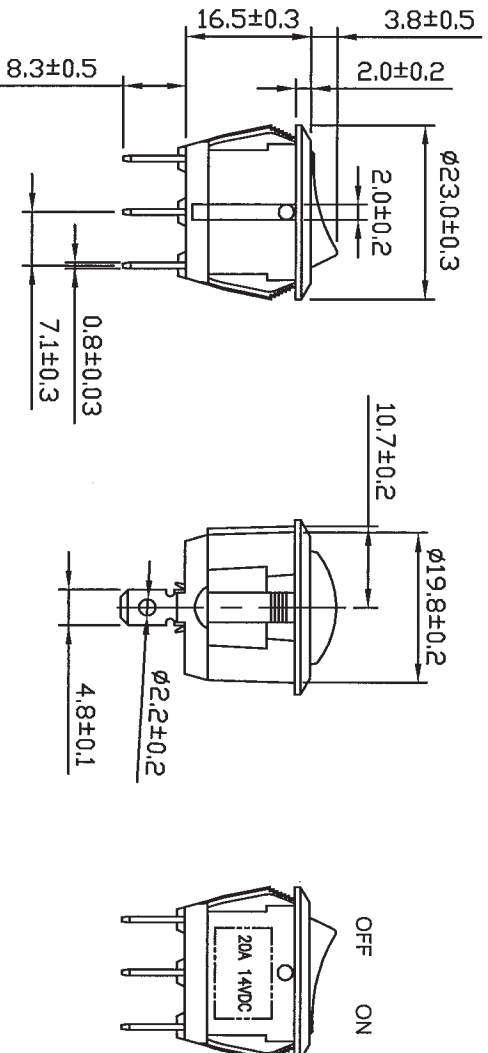

Material:
Frame: Nylon#66, Black
Actuator: PC, Green clear
Printed: None

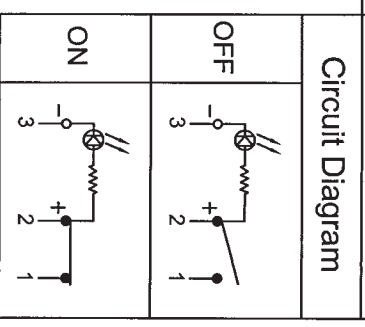

08/04/14	曹 盈 芳	依公司規定追加SCI Logo, 本體Rating改為20A 14VDC				△
11/08/10	Zhong	依客戶要求將燈泡更換為 ϕ 3 LED.				△
Date	Name	Description				No.
Drawn	Checked	Approved	SCI BOM No.	1820879	Model Name	ROCKER SWITCH
曹 盈 芳		王 芳 山	Customer No.		Model No.	R13-112B-02
08/04/14		8/4/14	Unit	mm	Shin Chin Industrial Co., Ltd.	
						Rev. 2