




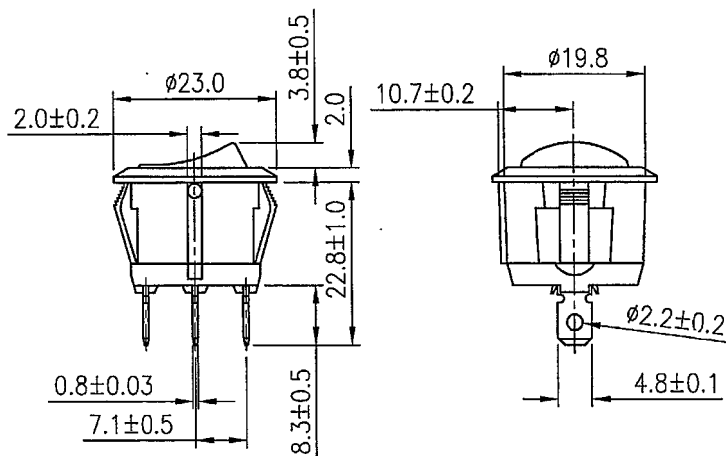



Rating	20A 14VDC	Mounting Hole	
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-25°C~85°C		
Switch Function	3P SPST ON-OFF (Bulb dependent)		
		Thickness:2.0~3.0	Thickness:0.7~3.0

Material:
Frame: Black, Nylon#66
Actuator: Yellow, PC
Printed: None

Circuit Diagram



1、Tolerances ± 0.3 Unless Otherwise Specified

03/17/17	曾敏捷	依現況增加 SCI Logo與更新本體刻字				△
Date	Name	Description				No.
Drawn	Checked	Approved	SCI BOM No.	1820876	Model Name	ROCKER SWITCH
曾敏捷	鍾金連	Simon	Customer No.	7500037	Model No.	R13-112B-02
03/17/17	3/23-17	3/23-17	Unit	mm	Shin Chin Industrial Co., Ltd.	
						Rev. 1