








Rating	10A 28VDC	Mounting Hole	
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-20°~85°		
Switch Function	3P SPST (ON)-OFF (LED dependent)		

***MATERIAL:**

Frame: Black, Nylon 66 (94-V2)
 Actuator: Red clear, PC (94-V2)
 Waterproof rubber: Silicone
 Terminals: Silver plated, Copper alloy
 Hot Stamping: None
 Waterproof: IP65
 LED color: Red



Circuit Diagram

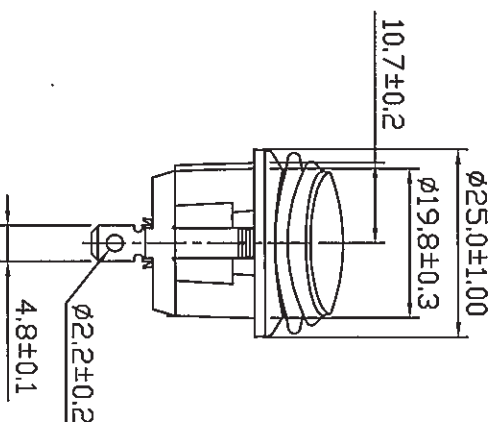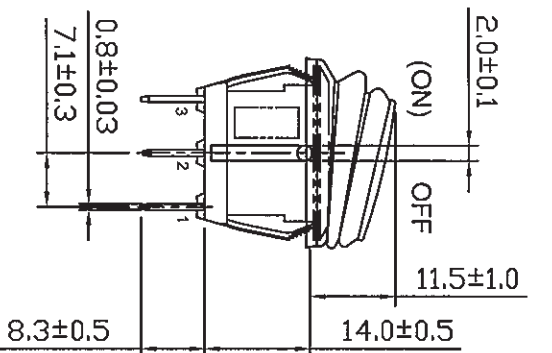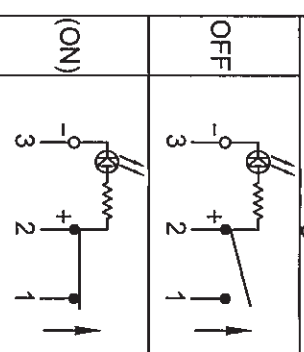

C8MR13R13-112B8F-02

Date	Name	Description				NO
Drawn	Checked	Approved	SCI BOM NO.	Model Name	ROCKER SWITCH	
曹盈芳		王伯山	Customer No.	Model No.	R13-112B8F-02	Rev. 0
02/12/14		2/12/14	Unit	mm	Shin Chin Industrial Co., Ltd.	