Rating	20A 14VDC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-20°C ~ 85°C
Switch Function	4P SPST (ON)-OFF (LED independent)

Mounting Hole



Thickness:2.0~3.0



Thickness:0.7~3.0

Material:
Frame: Black, PA#66
Actuator: Black, PA#66
Lens: Clear, PC
LED: Red

Circuit Diagram





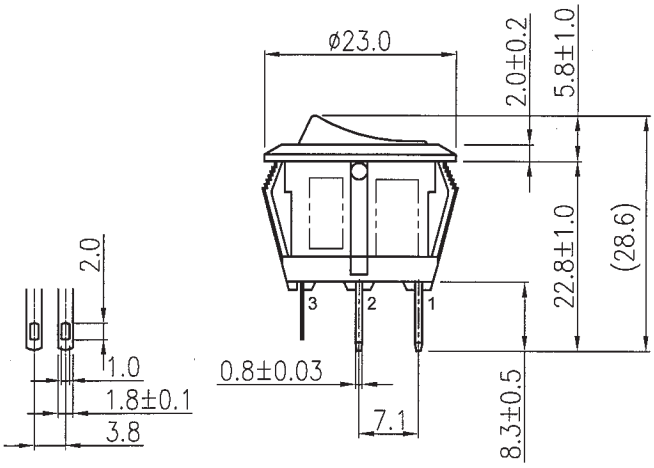

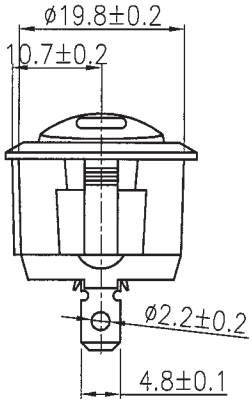



原稿
2015.8.27
研發部

Tolerances ±0.3 Unless Otherwise Specified

Date	Name	Description	No.
			△
			△

Drawn	Checked	Approved	SCI BOM No.	1823015	Model Name	ROCKER SWITCH	
曹盈芳		王伯山	Customer No.		Model No.	R13-112LF-02	Rev.
01/14/'15		1/14/15	Unit	mm	Shin Chin Industrial Co., Ltd.		0