


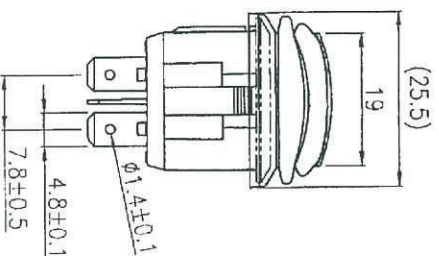
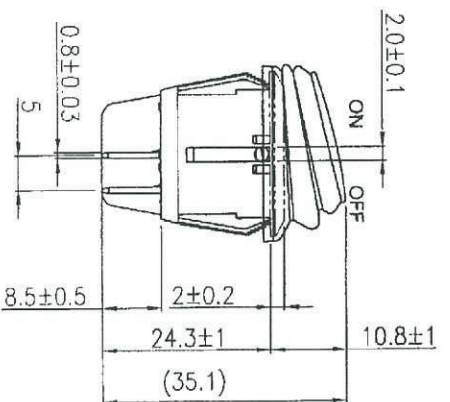


Rating	20A 12V DC	Mounting Hole	
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-25°C~85°C		
Switch Function	4P DPST ON-OFF(Led Dependent)		

Material:
Frame: Black, Nylon 66
Actuator: Green, PC
Printed: None



Tolerances ±0.3 Unless Otherwise Specified

9/20/12	張東	更新本體印刷，加SCI LOGO.		A
6/27/07	曹盈芳	R13-244A8系列只通過UL，本體取消ENEC,增加T85，重新出圖.		A
Date	Name	Description		No.
Drawn	Checked	Approved	SCI BOM No.	Model Name
張東	曹盈芳	曹盈芳	1823925	ROCKER SWITCH
9/20/12	9/28-12	9/28-12	Unit	Model No.
			mm	R13-244B8-02
				Rev.
				2

Shin Chin Industrial Co., Ltd.