




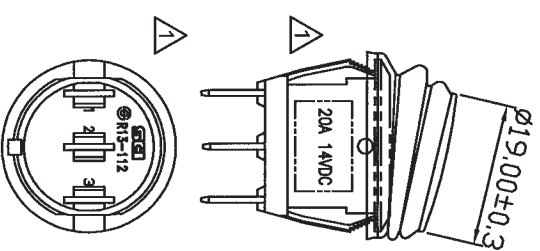
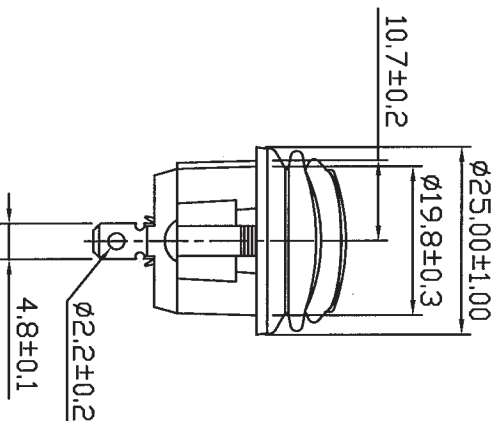


Rating	20A 14VDC	Mounting Hole	
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-25°C ~ 85°C		
Switch Function	3P SPST ON-OFF (LED dependent)		

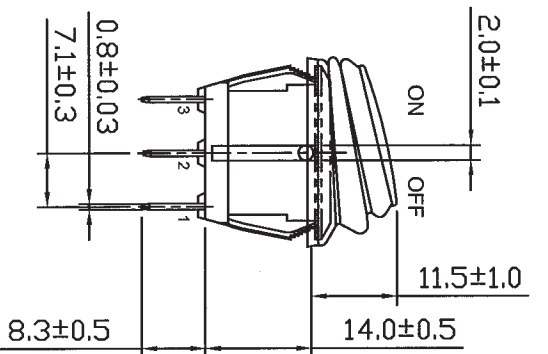

*MATERIAL:
 Frame: Nylon 66, Black
 Actuator: PC, Green clear
 Waterproof rubber: Silicone
 Terminals: Silver plated, Copper alloy
 Hot Stamping: None
 Waterproof: IP65
 LED color: Green

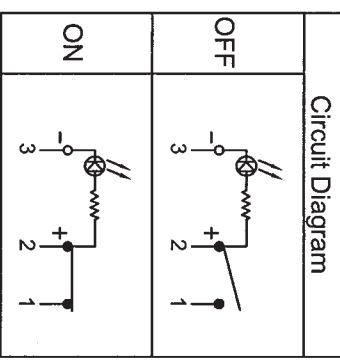

08/04/16	曹盈芳	依公司規定追加SCI Logo, 本體Rating改為20A 14VDC			△
Date	Name	Description			NO
Drawn	Checked	Approved	SCI BOM NO.	Model Name	ROCKER SWITCH
曹盈芳		王伯山	Customer No.	Model No.	R13-112B8-02
08/04/16		8/4/16	Unit	mm	Shin Chin Industrial Co., Ltd.
					Rev. 1