



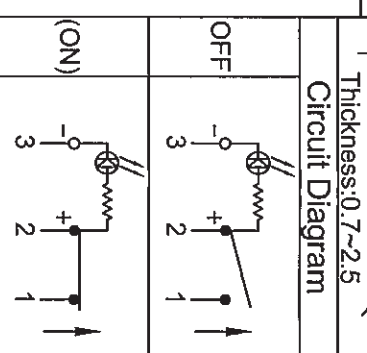

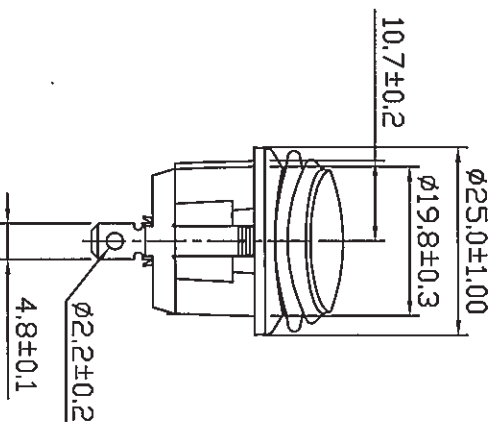
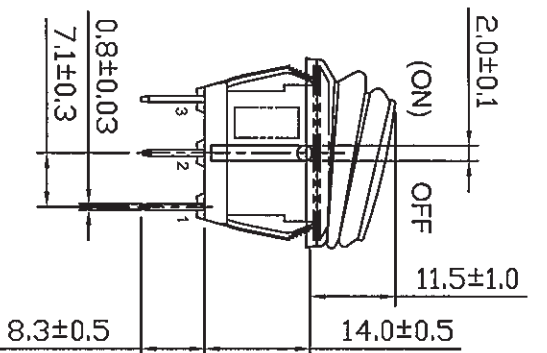


Rating		Mounting Hole	
Contact Resistance	10A 28VDC		
Insulation Resistance	50m ohm Max.		
Dielectric Strength	DC 500V 100M ohm Min.		
Operation Temperature	AC 1500V 1 minute		
Switch Function	-20°~85°		
3P SPST (ON)-OFF (LED dependent)			

*MATERIAL:
Frame: Black, Nylon 66 (94-V2)
Actuator: Red clear, PC (94-V2)
Waterproof rubber: Silicone
Terminals: Silver plated, Copper alloy
Hot Stamping: None
Waterproof: IP65
LED color: Red



C8MR13R13-112B8F-02



Date	Name	Description				NO
Drawn	Checked	Approved	SCI BOM NO.	Model Name	ROCKER SWITCH	
曹盈芳		王伯山	Customer No.	Model No.	R13-112B8F-02	Rev. 0
02/12/14		2/12/14	Unit	mm	Shin Chin Industrial Co., Ltd.	