





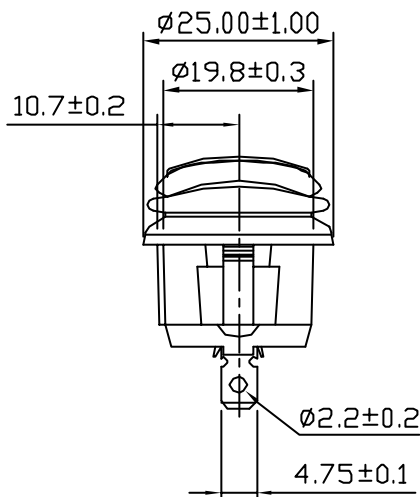


Rating	10A 24VDC	Mounting Hole	
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-20°~85°		
Switch Function	3P SPST ON-OFF (LED)		

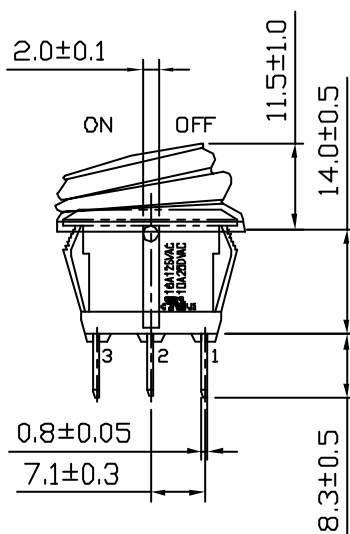


*MATERIAL:
Frame: Nylon 66
Actuator: PC
Waterproof rubber: Silicone
Terminals: Silver plated, Copper alloy
Hot Stamping: None
Waterproof: IP65

Circuit Diagram



COLOR	Frame	Actuator	Waterproof rubber
SCI No.			
1824022	Black	Yellow clear	Black
1824023	Black	Blue clear	Black
1824024	Black	Green clear	Black



C8\R13\R13-112B8W-02(1824022,023,024)

Date	Name	Description	REV.	0	NO				
Drawn	Checked	Approved	SCI BOM NO.	SEE TABLE	Model Name	ROCKER SWITCH			
曹 盈 芳	王 佰 山	李 景 煌	Customer No.		Model No.	R13-112B8W-02	REV.		
09/20/'07	09/20/'07	09/20/'07	Unit	mm	SHIN CHIN INDUSTRIAL CO., LTD.		0		