




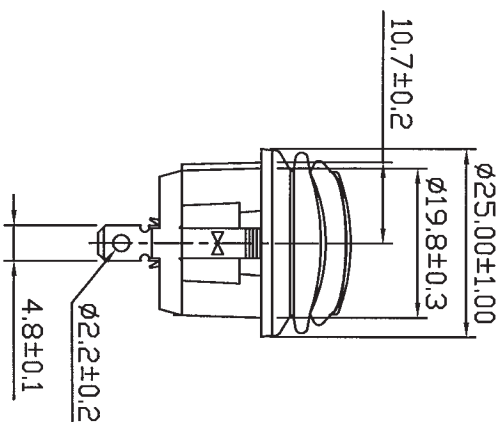
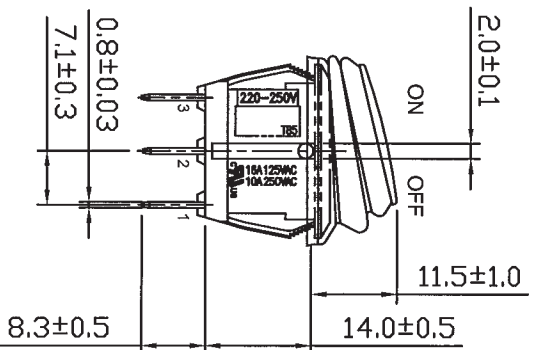
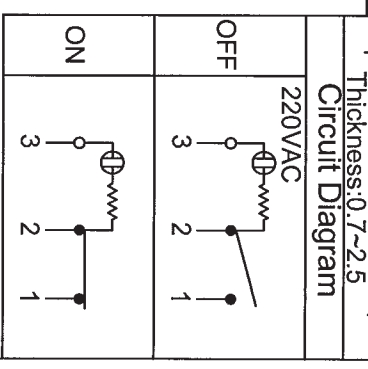


Rating	16A 125VAC, 10A 250VAC 		Mounting Hole	
	10(4)A 250V~			
Contact Resistance	50m ohm Max.			
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute			
Operation Temperature	-25°C~85°C			
Switch Function	3P SPST ON-OFF (Neon dependent)			

***MATERIAL:**

Frame: Nylon 66, Black
 Actuator: PC, Green clear
 Waterproof rubber: Silicone
 Terminals: Silver plated, Copper alloy
 Hot Stamping: None
 Waterproof: IP65



C8R13/R13-112B8-02(1823705)_1

09/17/'14	曹盈芳	依公司規定追加SCI Logo			
Date	Name	Description		NO	
Drawn	Checked	Approved	SCI BOM NO	1823985	Model Name ROCKER SWITCH
曹盈芳		王明	Customer No.		Model No. R13-112B8-02
09/17/'14		8/17/14	Unit	mm	Shin Chin Industrial Co., Ltd.
					Rev. 1