




Rating	10A125VAC 6A 250VAC CQC T85 16A125VAC 10A250VAC  10(4)A 250V~ 	Mounting Hole	
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-25°C~85°C		
Switch Function	4P SPST ON-OFF (LED Independent)		

Thickness:2.0~3.0

Thickness:0.7~3.0

Circuit Diagram








Material:

Frame: Black,Nylon 66

Actuator:Black,Nylon66

Lens: Clear,PC

LED: Red

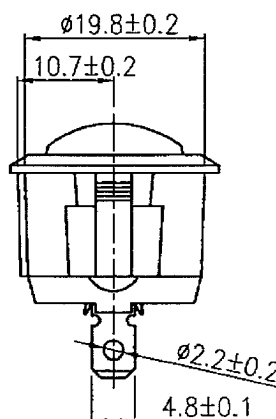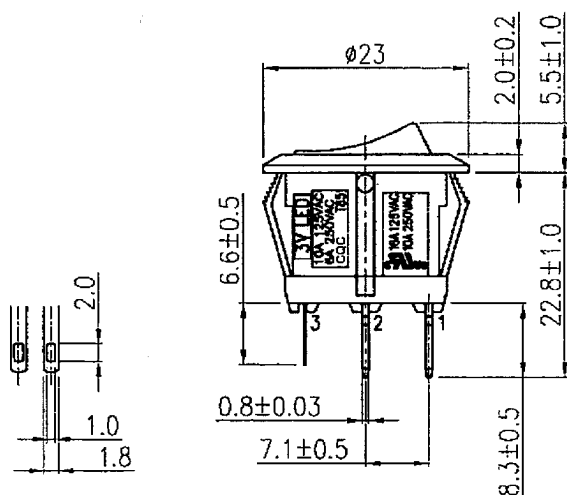

Tolerances ±0.3Unless Otherwise Specified

Date	Name	Description	No.
Drawn	Checked	Approved	SCI BOM No
周傑輝	符江迎	Simon	Customer No
4/22/14	4/28-14	4/28-14	Unit
		mm	
		Shin Chin Industrial Co., Ltd.	

Rev.
0