


SKINDICHT® MA-PG/M

SKINDICHT® MA-PG/M, nickel-plated brass adapter with PG connection thread as adapter from a PG outer thread to a metric inner thread

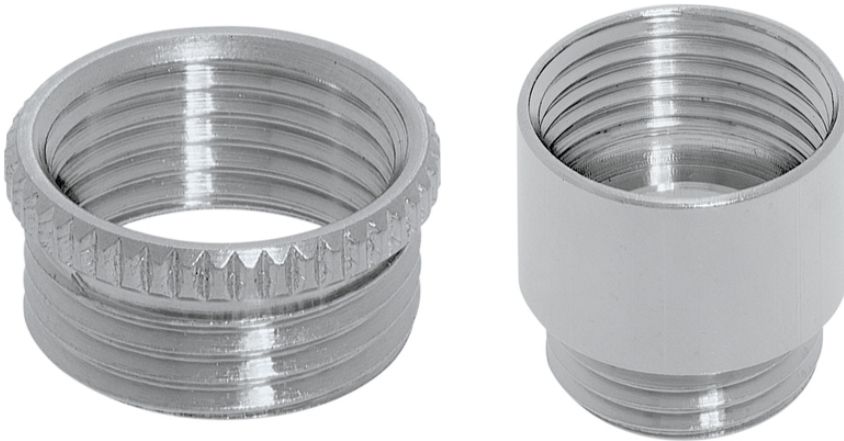

Benefits

Adapter from a PG outer thread to a metric inner thread

Application range

Housings
Industrial connectors
Machines

Product Make-up

PG connection thread

Product Make-up

Form A: knurl
Form B: smooth

Technical Data

Classification ETIM 5:

ETIM 5.0 Class-ID: EC000441

ETIM 5.0 Class-Description: Cable screw gland

Classification ETIM 6:

ETIM 6.0 Class-ID: EC000441

ETIM 6.0 Class-Description: Cable screw gland

Material:

Nickel-plated brass

Temperature range:

-60°C to +200°C

Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products. Prices are net prices without VAT and surcharges. Sale to business customers only.

**SKINDICHT® MA-PG/M**

Article number	Form	PG size	Thread, female M2
SKINDICHT® MA-PG/M			
52104490	B	7	12 x 1.5
52104491	B	9	16 x 1.5
52104492	A	11	16 x 1.5
52104493	B	11	20 x 1.5
52104494	B	13.5	20 x 1.5
52104495	A	16	20 x 1.5
52104496	B	16	25 x 1.5
52104497	A	21	20 x 1.5
52104498	A	21	25 x 1.5
52104499	B	21	32 x 1.5
52104500	A	29	25 x 1.5
52104501	A	29	32 x 1.5
52104502	B	29	40 x 1.5
52104503	A	36	40 x 1.5

Last Update (05.04.2018)

©2018 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16