
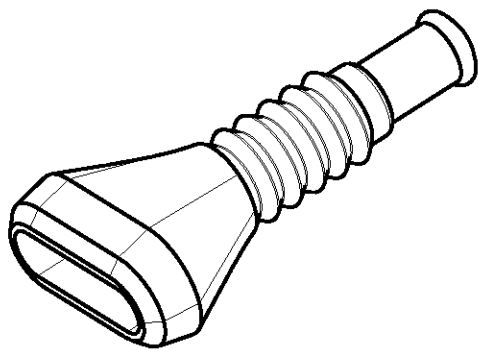
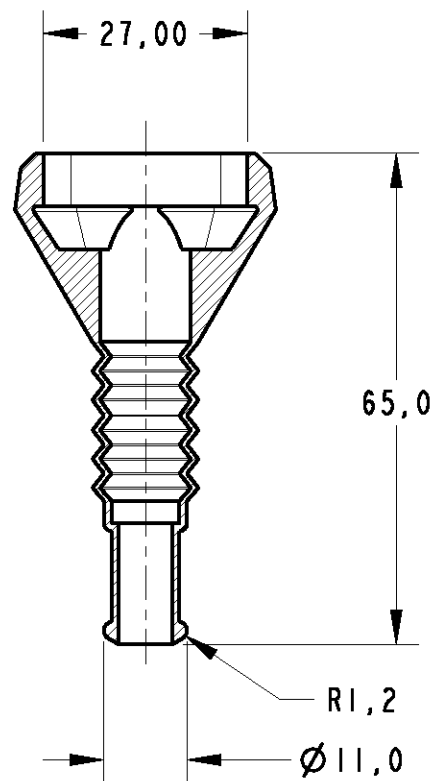
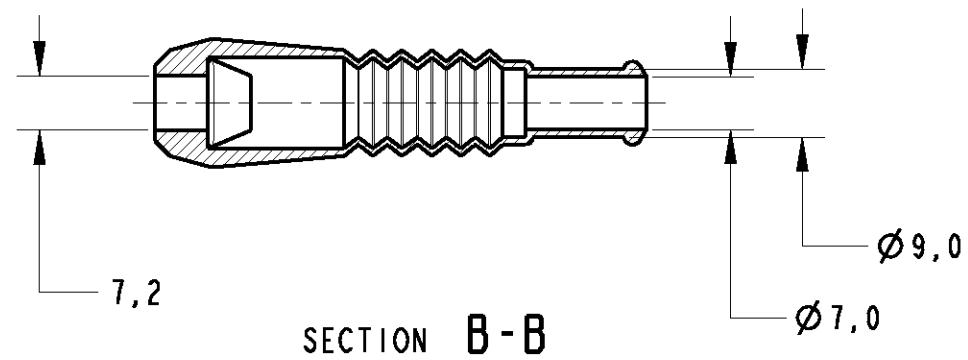


2							
LOC	DIST	REVISIONS					
AP	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
 DO NOT REVISE EXCEPT BY CAD			0	WAS 98-29092-001	-	AP	PLF
			A	REVISED BY ECR-05-008986	29AUG2005	DCB	PLF

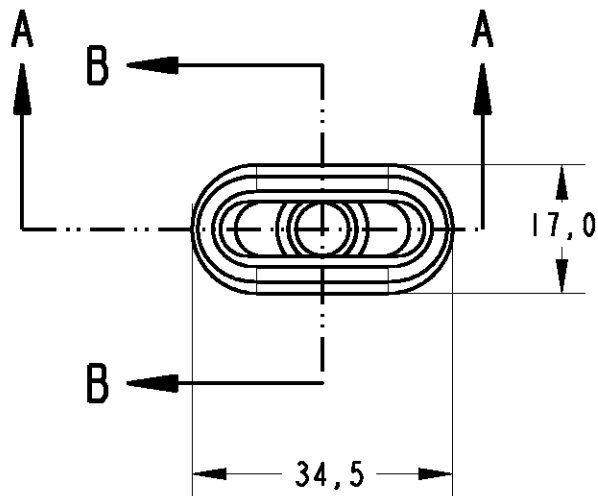

PERSPECTIVE VIEW

- Ⓐ  - ELASTÔMERO SAE J 200 M 2BC 514, A14, B14, C12, E014, F17
- ELASTOMER SAE J 200 M 2BC 521, A14, B14, C12, E014, F17
- Ⓐ 2 - TOLERÂNCIA PARA REBARBAS / FLASH TOLERANCE:
COMPRIMENTO EXTERNO / OUTSIDE HEIGHT - 0,4mm MAX.
COMPRIMENTO INTERNO / INSIDE HEIGHT - 0,05mm MAX.
- Ⓐ 3 - USADO NO CONECTOR 282106-1, OU SIMILAR
- USED ON CONNECTOR 282106-1, OR SIMILAR

—		PRETO/BLACK				493581-1					
RAW MAT'L NO.		FINISH		MATERIAL		PART NUMBER					
FOR AMP INCORPORATED: CONTROLLING ENGINEERING THE LATEST REVISION. TOLERANCES UNLESS OTHERWISE SPECIFIED: C ± C ±0.5 C ± C ± C ± C ± ES ±1 SH SEE TABLE		DWN A.PERUSSI 03SEP98		 AMP do BRASIL LTDA. São Paulo, Brasil							
		CHK P.L.FARIA									
		APVD J.M.M.NETO		NAME BOOT 4 POSN HSG							
		PRODUCT SPEC -									
APPLICATION SPEC -		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO			
WEIGHT -		A3		00779		C= 493581		-			
CUSTOMER DRAWING				SCALE		SHEET		OF		REV	
				1:1		1		1		A	