


Features

- Integral lead with a non-terminated end
- The plug and lead assembly has a 2 core 0.75 mm² harmonised cable
- Each individual conductor is stripped




Specification

| | |
|-----------------------|----------------------|
| Connector A | Euro Male |
| Connector B | Open End |
| Connector Orientation | Straight |
| Cross-Section | 0.75 mm ² |
| Current Rating | 2.5 A |
| Jacket Colour | Black |
| Jacket Material | PVC |
| Length (L) | 2 m |
| Voltage Rating Max. | 250 V |

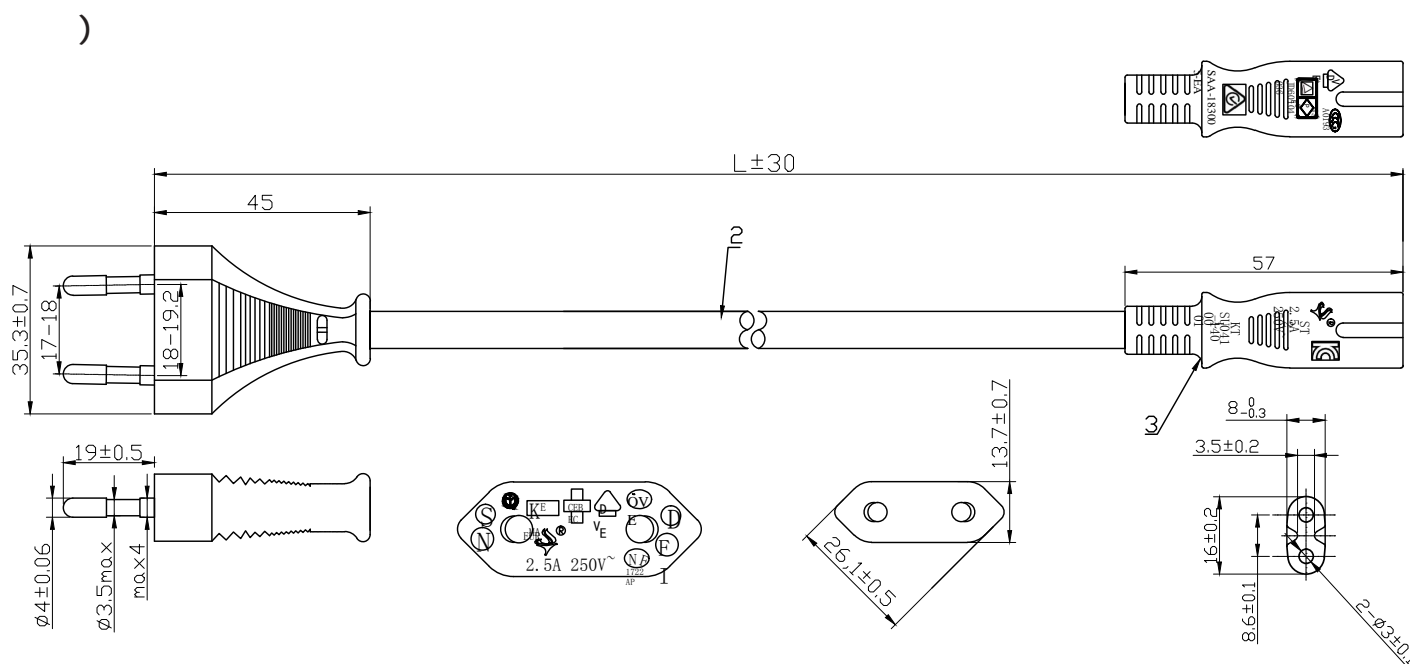

Notes:

- 1.Cable:H03VV2-F 2*0.75²mm Jacket 3.5±0.1*5.7±0.1 Conductor 24*0.198
- 2.Mark:  H03VVH2-F 2*0.75mm²
- 3.Test:Hi-pot: Inner Voltage AC2500V/1S , External Voltage AC4500V/1S
current leakage 1mA, insulation resistance no less than 50M Ω, no strike out;

Art. Nr.

FB8 (*) ! \$1014