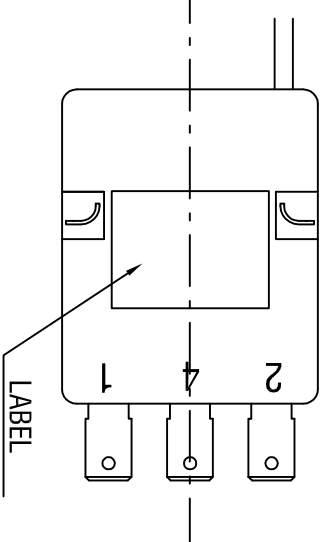
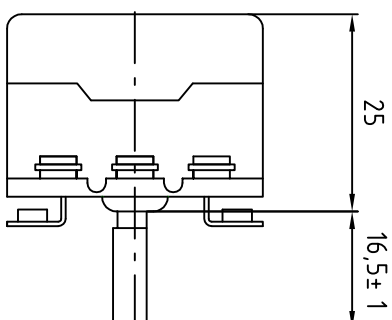
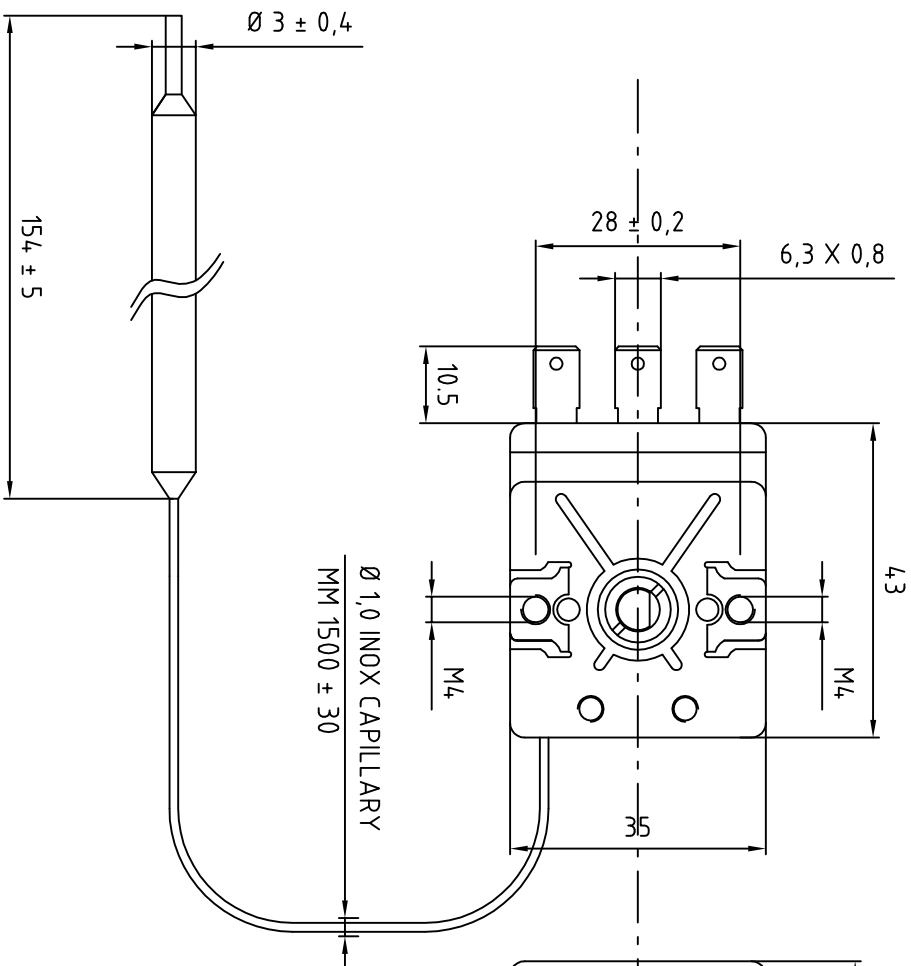


ELECTRIC DIAGRAM _ S.P.D.T.

Technical Data	
H/OFF :	315°C ±12°C
L/OFF :	50°C
BREAKING CAPACITY	C-1 16(2,6)A 250 VAC - C-2 3(0,5)A 250 VAC
MAX °C AROUND THE BODY:	T150°C
MAX °C AROUND THE BULB:	UPPER SWITCHING VALUE +15%
LIFE OF PRODUCTS:	60.000 CYCLES
DIFFERENTIAL:	10 ± 6 °C
INSULATION ANDVOL TAGE RES.:	2000 V / MIN.
INSULATION RESISTANCE:	> 500 M OHM
RIF.:	.

ARTHERMO	CODICE:	C713202000
	DESCRIZIONE :	Termostato reg. 50/315°C SP-DT cap.mmm 1500 inox capillary faston 6,3 X 0,8

SCALA :	1 : 1	DISEGNATO:	SALA A.	MODIFICA :	DATA:
DATA :	04/11/2010	CONTROLLATO:	SALA A.		
TOLL.GEN.:	+/-0,1				

Descrizione revisione :					Data
Descrizione revisione :					Data
Descrizione revisione :					Data

TERMOSTATO COMPLETO DI ACCESSORI (MANOPOLA - GHIERA E VITI)
COD.C713202530N