


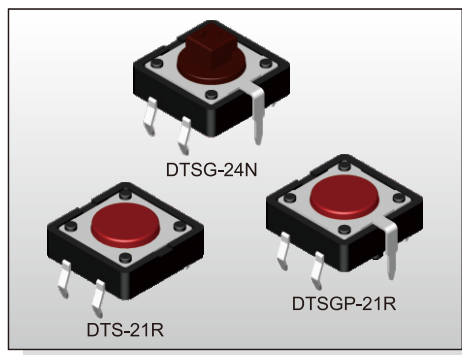

### FEATURES

- ※Snap in type with ground pin
- ※Guide bosses available
- ※Cap options


### APPLICATION

- ※Audio, OA equipment
- ※Instrumentation
- ※Industrial


### SPECIFICATION

|                       |                                                                                                                                                                                                                                           |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Contact Rating        | 50mA, 12V DC                                                                                                                                                                                                                              |
| Contact Resistance    | 100mΩ max.                                                                                                                                                                                                                                |
| Insulation Resistance | 100MΩ min. 500V DC                                                                                                                                                                                                                        |
| Dielectric Strength   | 250V AC/1 minute                                                                                                                                                                                                                          |
| Operating Force       | 130±50gf, Black(K)<br>160±50gf, Brown(N)<br>260±50gf, Red(R)<br>320±80gf, Salmon(S)<br>520±130gf, Yellow(Y)                                                                                                                               |
| Travel                | 0.35mm                                                                                                                                                                                                                                    |
| Operating Life        | Phosphor Bronze Dome<br>100,000 cycles for 520/320/260gf<br>200,000 cycles for 160gf<br><br>Stainless Steel Dome<br>300,000 cycles for 520/320gf<br>500,000 cycles for 260gf<br>1,000,000 cycles for 160gf<br>10,000,000 cycles for 130gf |
| Operating Temp.       | -25°C ~ +70°C                                                                                                                                                                                                                             |
| Storage Temp.         | -30°C ~ +80°C                                                                                                                                                                                                                             |

### HOW TO ORDER

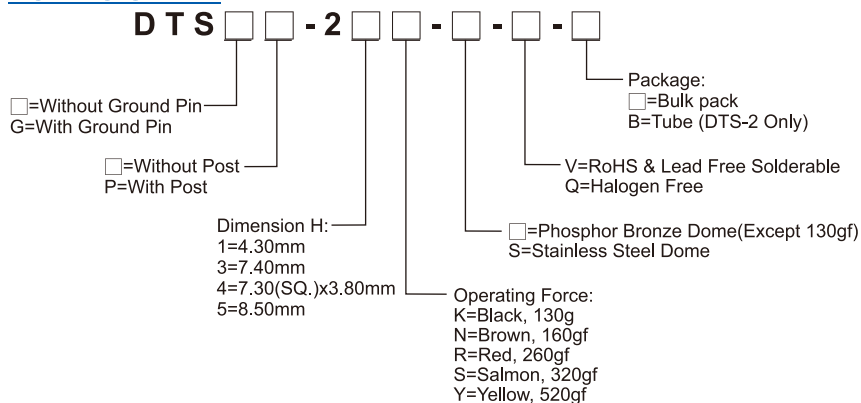

### CIRCUIT

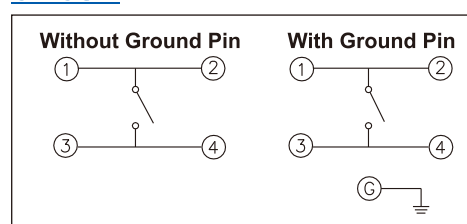

### PACKAGE



<Bag>

500 pcs

<Tube>


DTS-2: 40 pcs

### DTS-2


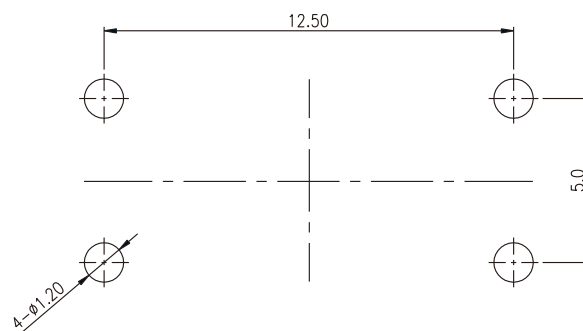
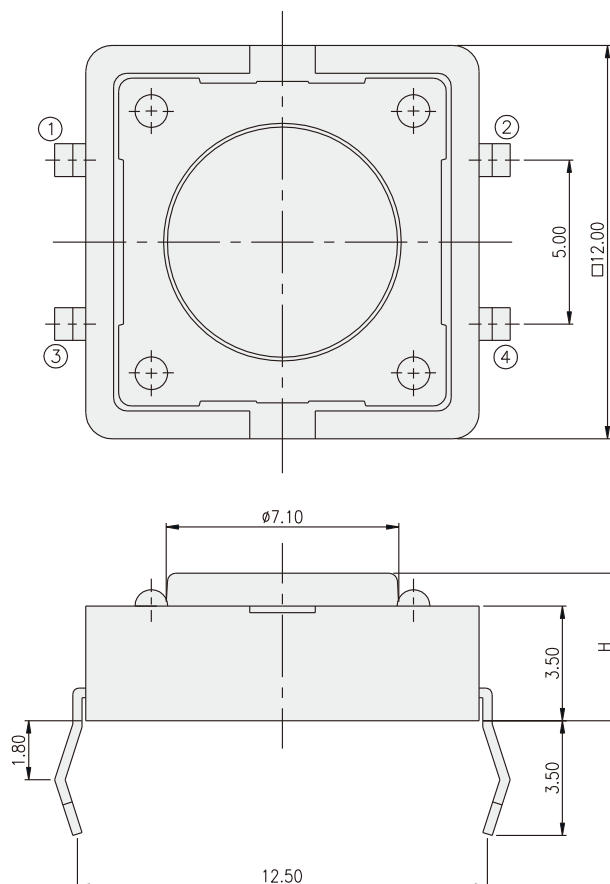


P.C.B. LAYOUT




| PART NO. | H    |
|----------|------|
| DTS-21   | 4.30 |
| DTS-23   | 7.40 |
| DTS-25   | 8.50 |

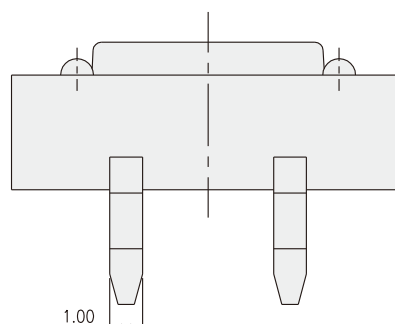



**DTS-24**

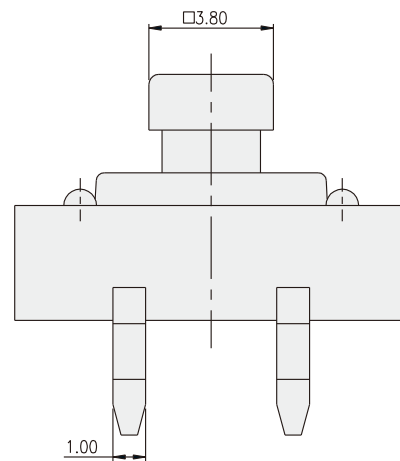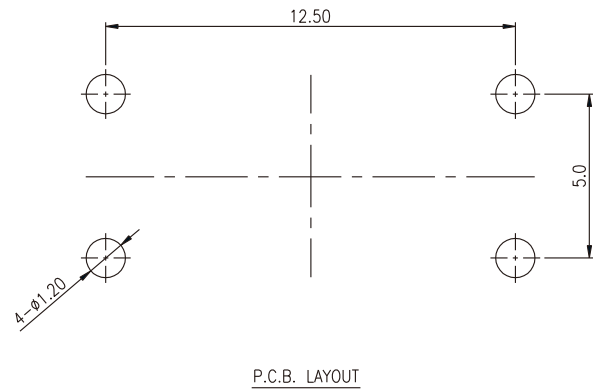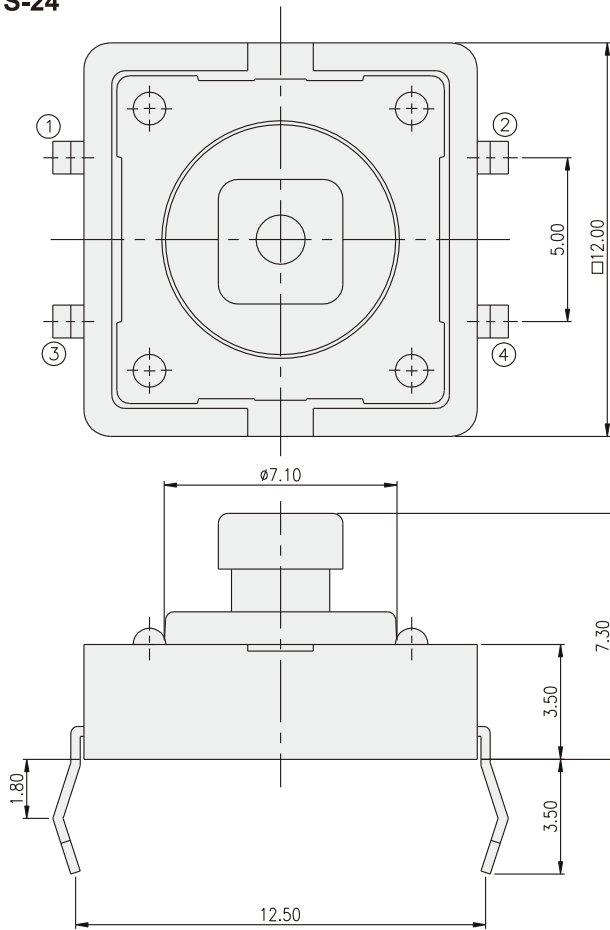

**DTSP-24**

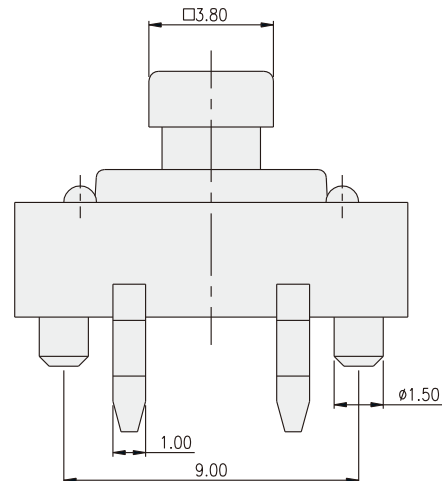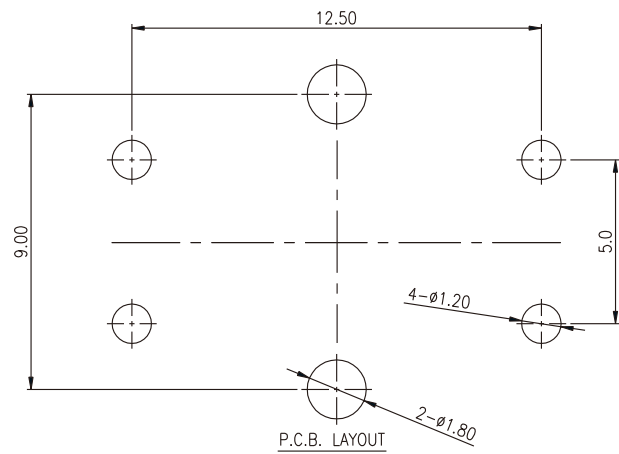
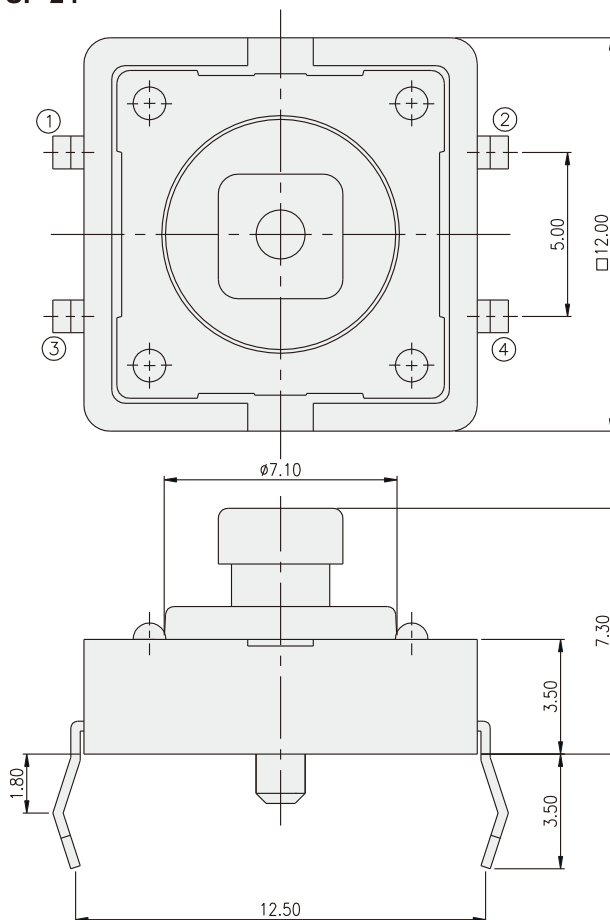


**DTSG-2**

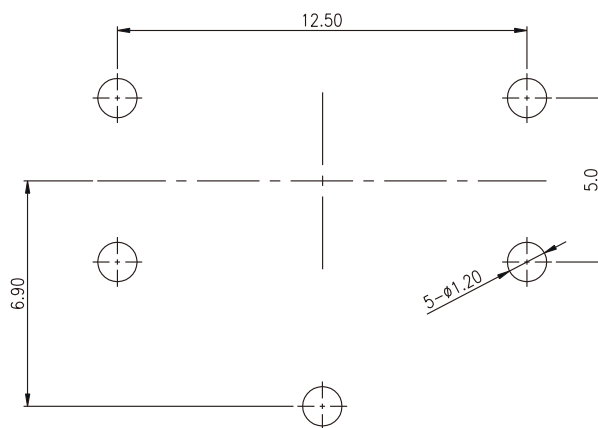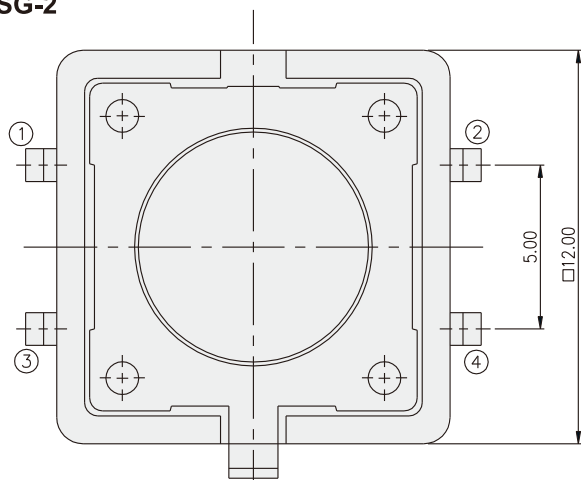



| PART NO. | H    |
|----------|------|
| DTSG-21  | 4.30 |
| DTSG-23  | 7.40 |
| DTSG-25  | 8.50 |

P.C.B. LAYOUT

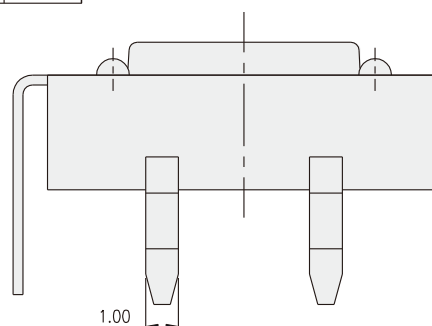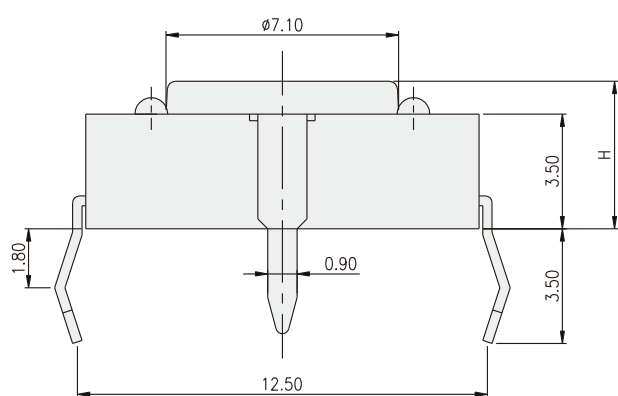

TACT SWITCH

**DTSGP-2**

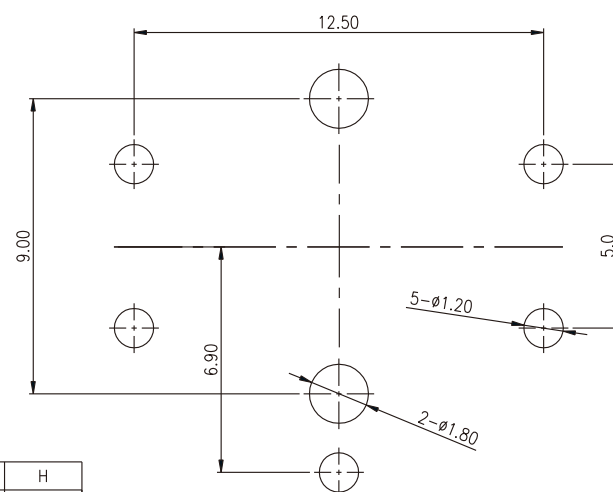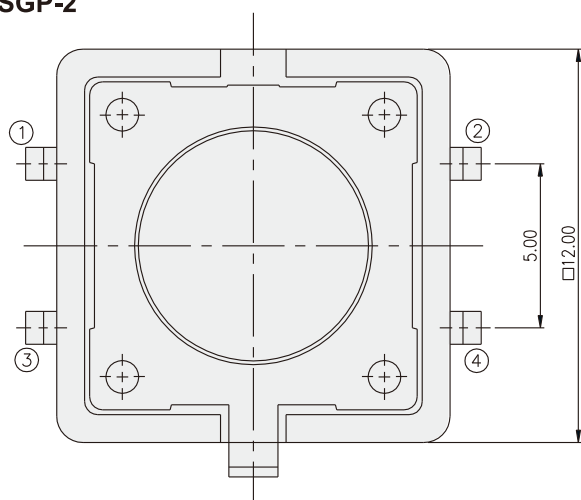

| PART NO. | H    |
|----------|------|
| DTSGP-21 | 4.30 |
| DTSGP-23 | 7.40 |
| DTSGP-25 | 8.50 |

P.C.B. LAYOUT

